"I" TIR Book P. 103

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER


NE Corner to Section 10 Township 104N Range 14W No. 3

STATE OF MINNESOTA,

County of Mower - Olmsted S.S.

I hereby certify that on the 21st day of November, 1966 that I, Leonard Sankstone, a Registered Land Surveyor, ~~found~~ set the Northeast corner of Section 10, T104N, R14W, which was evidenced by prior survey in 1875 and 1881 by Hunter, County Surveyor, Olmsted County, and I further certify that to perpetuate the location of such corner I did, at the exact location thereof, place a permanent marker consisting of 3"x20" cast iron ferro magnetic monument, 6" below grade. I further certify that I established 8 references or witness monuments consisting of 3 pipe, 2 fence posts, 2 R/W markers, 1 power pole, which reference or witness monuments are located in the manner following.

NE 56.94 ft. 3"Iron Pipe Fence Post(top ctr)
ESE 137.12 ft. 1" Iron Pipe (top ctr)
SE 42.09 ft. 1" Iron Pipe (top ctr)
'E 104.36 ft. 1" Iron Pipe (top ctr)
SW 77.65 ft. Power Pole (N&B cap)
SW 70.20 ft. Hwy R/W Marker(top ctr)
SW 68.61 ft. Cor. Fence Post(N&B cap)
NW 76.48 ft. Hwy R/W Marker (top c.)
(15.5' E of ℄ U.S. Hwy. 63
9.0' S of ℄ Town road) Approx. Loc.

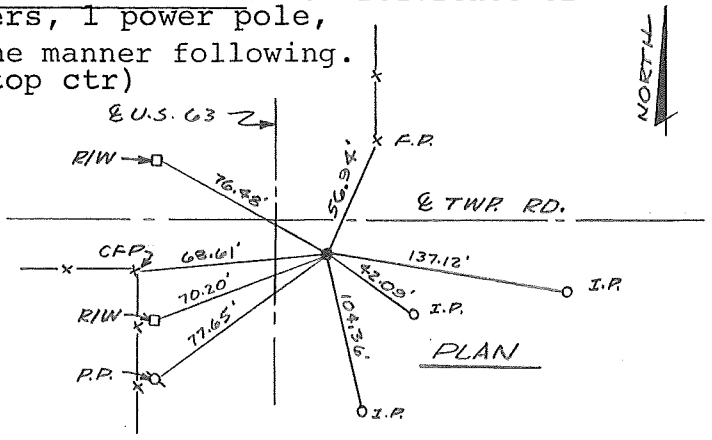

Dated at Rochester, Minnesota, this 1st day of December, 1966.

Distance to N1/4 Sec. 10 = 2639.29
Distance to E1/4 Sec. 3 = 2655.18
Distance to Railroad = 1415.20

Leonard Sankstone

Registered Land Surveyor No. 5325

OFFICE OF THE REGISTER OF DEEDS

County of _____

I hereby certify that the within instrument was filed in this office for record on the _____ day of _____ A.D., 19____.

Register of Deeds

Office of Register of Deeds (Co. Seal) 280006
I hereby certify that the within instrument was filed for record on the 3 day of Dec 64
at 11 o'clock A.M. and duly recorded in Book 25
of Misc on page 135.
Register of Deeds
By _____, Deputy