Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

N 1/4 Corner of Section 19, Township 104N, Range 14W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch:

☒ On 10-17-91 (DATE) found a 3/4" ø pipe over a deteriated 5" dia. concrete monument cast in clay tile

☒ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 10-17-91 (DATE) placed a Cast iron monument over concrete monument

SKETCH OF REFERENCE TIES

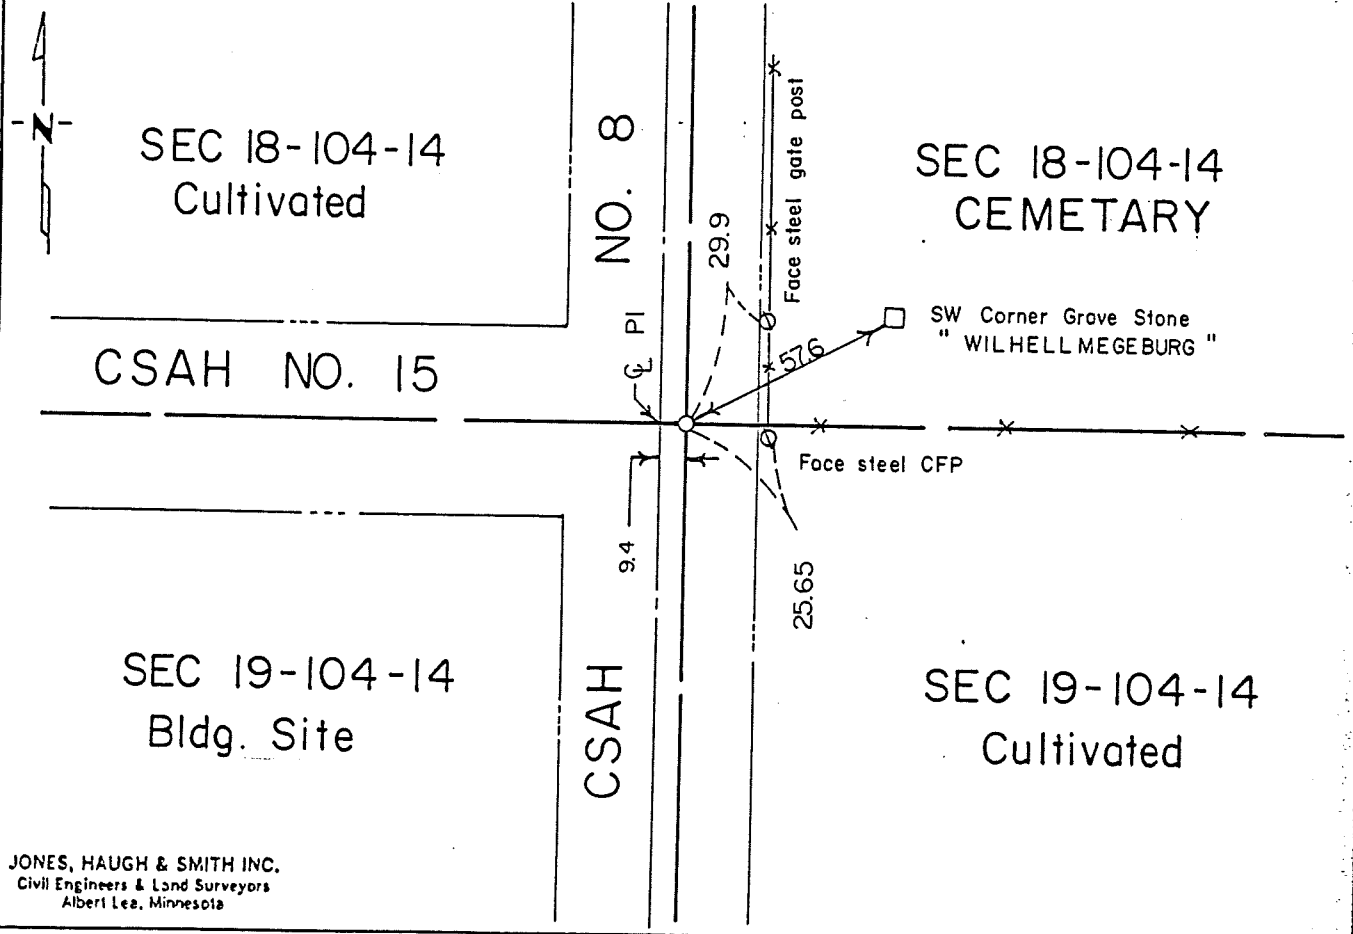

JONES, HAUGH & SMITH INC.
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

SIGNATURE _____ DATE 12-9-91

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☑ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of _____

I hereby certify that this document was filed in the County Rec. office at _____ .M. on the _____ day of _____ A.D., 19___

COUNTY RECORDER _____

By _____, Deputy

DOCUMENT NO. _____

M.H.D. FORM NO. 2105

STATEMENT OF EVIDENCE

N 1/4 corner Section 19-104-14

This corner was originally established by Deputy Surveyor John Taylor of the U.S. General Land Office in 1854. The government notes show a wood post was set with a mound of earth and trench.

The following were contacted for section corner information:
Mower County Recorder's Office
Mower County Highway Department
Zenk Engineering
Tucker Land Surveying

1930 Mower County Grading Plans show a concrete monument inplace 9.4 feet east of centerline PI at Sta 106+04.8 and the following ties were taken:
24.6' E to cemetery gate post
65.3' NE to tombstone of 'Laabs'
69.0' NE to tombstone of 'Buchloz'

1930 Book 'A' in the Office of the Mower County Engineer shows a concrete monument inplace and the following ties were taken:
69.5' SW to Willow Tree
44.0' NW to CFP
68.0' NE to Balsam tree in cemetery
56.5' NE to tombstone of 'Wilhelmine'
65.3' NE to tombstone of 'Laabs'
69.0' NE to tombstone of 'Bucholz'

1965 Book 'A' in the Office of the Mower County Engineer shows a concrete monument inplace 9.4' east of centerline PI and the following ties were taken:
24.6' E to cemetery gate post
65.3' NE to tombstone of 'Laabs'
69.0' NE to tombstone of 'Buchloz'

1991 Jones, Haugh & Smith Inc crew under the direction of John Schulte, County Surveyor, dug with the County backhoe at a point 9.4 feet east of the centerline of CSAH #8 in line with fence east and uncovered a 3/4" diameter pipe one foot below road surface. Continued digging and found a 5" diameter deteriorated concrete monument cast in the center of a clay tile. Monument agrees with past records and was left as found. A cast iron monument was placed over concrete monument on road surface.

The monument found fits occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

For electronic survey data & analysis contact the firm of Jones, Haugh & Smith Inc.