Index No. N-7

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

NORTH QUARTER Corner of Section 20, Township 104, Range 14, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch:

☐ On _____ (DATE) found a _____

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

■ On 7/22/97 (DATE) Placed a 3/4" X 24" REBAR WITH AN ALUMINUM CAP, STAMPED "DNR SURVEY MARKER" UP 0.2'

SKETCH OF REFERENCE TIES

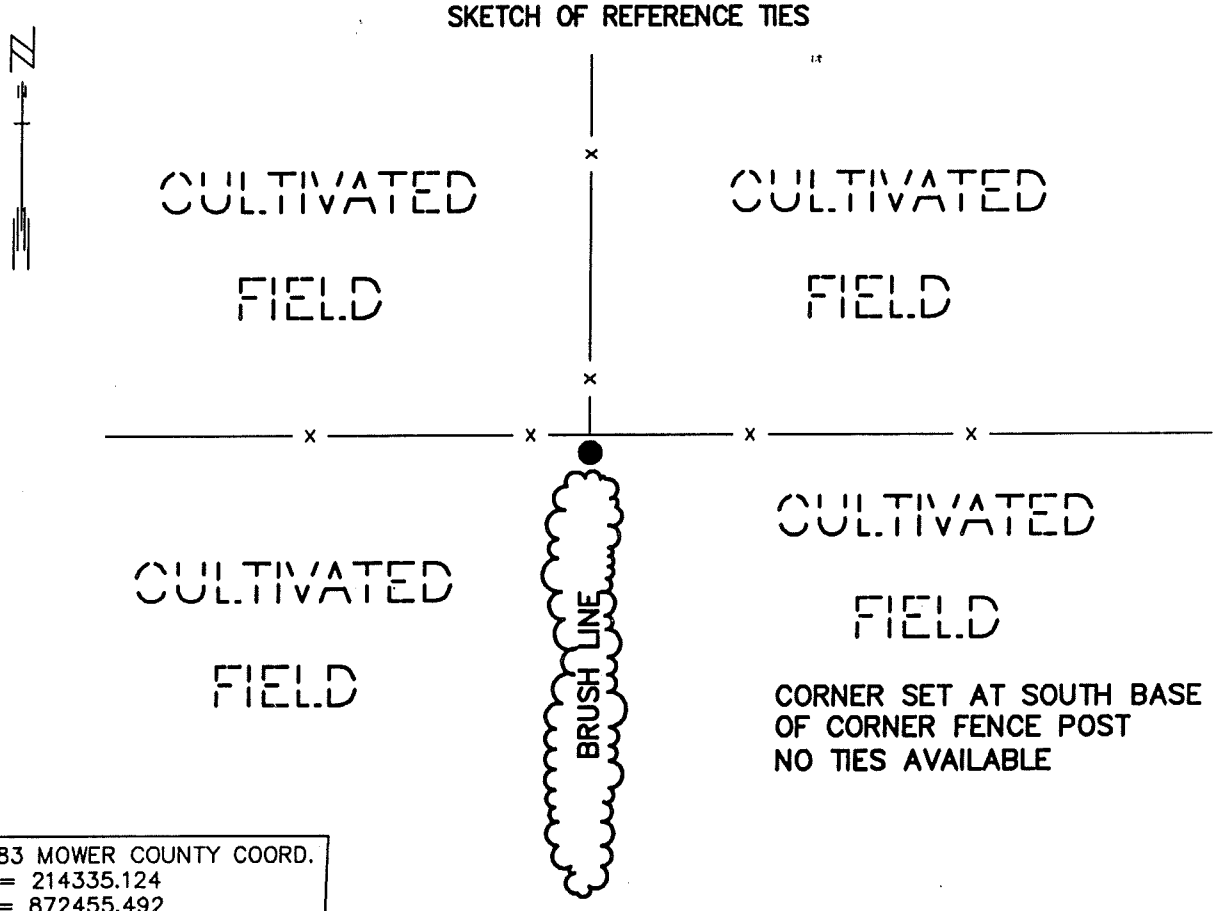

1983 MOWER COUNTY COORD.
N = 214335.124
E = 872455.492

Statement of evidence relative to this corner location is on back of page.

Oct 6, 1997
WMA01465

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

Bruce W. Hoppe (SIGNATURE) 10/24/97 (DATE)

License Number 17003

■ Land Surveyor, ☐ Professional Engineer

☐ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER

County of _____

I hereby certify that this document was filed in the Co. recorders office at _____ .M. on the ____ day of _____ A.D., 19____

County Recorder _____

By _____, Deputy

DOCUMENT NO. _____

North Quarter Corner of Section 20, Township 104 North, Range 14 West

The DNR Bureau of Engineering contacted the following for survey information:
Minnesota Secretary of State's Office
Jones, Haugh and Smith Inc. of Albert Lea (John H. Schulte IV, part time County Surveyor)

1853 U. S. General Land Office notes obtained from the Secretary of State's Office show the corner marked with a wood post and deposited charcoal in a mound of earth and sod with a cut trench. Also, planted osage orange seeds north and south between pits and trench.

No resurvey information was obtained for this corner.

1997 July 22, DNR Bureau of Engineering traversed to the area of corner and found an old wood corner fence post with fences east, west and north and a brush line south. Probed and dug a 6 foot diameter area around the corner fence corner and scanned the area with an electronic metal detector in search of a monument but did not find one. Set a 3/4 inch diameter by 24 inch long re-bar with aluminum cap marked "DNR SURVEY MARKER" at the south base of corner fence post and found it to be:
2643.95 feet from the northeast corner of Section 19
5297.81 feet from the north quarter of Section 17

Analysis of the above information led the DNR Bureau of Engineering to conclude that the corner fence post with fences east, west and north marks the obliterated position of the corner. Set a DNR Survey Marker next to the corner fence post.