Index No. P 90 "R" P 104 "X" 101 "I"

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

W1/4 Corner of Section 26, Township 104N Range 14W, 5TH P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch:

☐ On 10-27-92 (DATE) found a 3/4"ø CAPPED PIPE RLS #6980

☒ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 10-27-92 (DATE) placed a NOTHING

SKETCH OF REFERENCE TIES

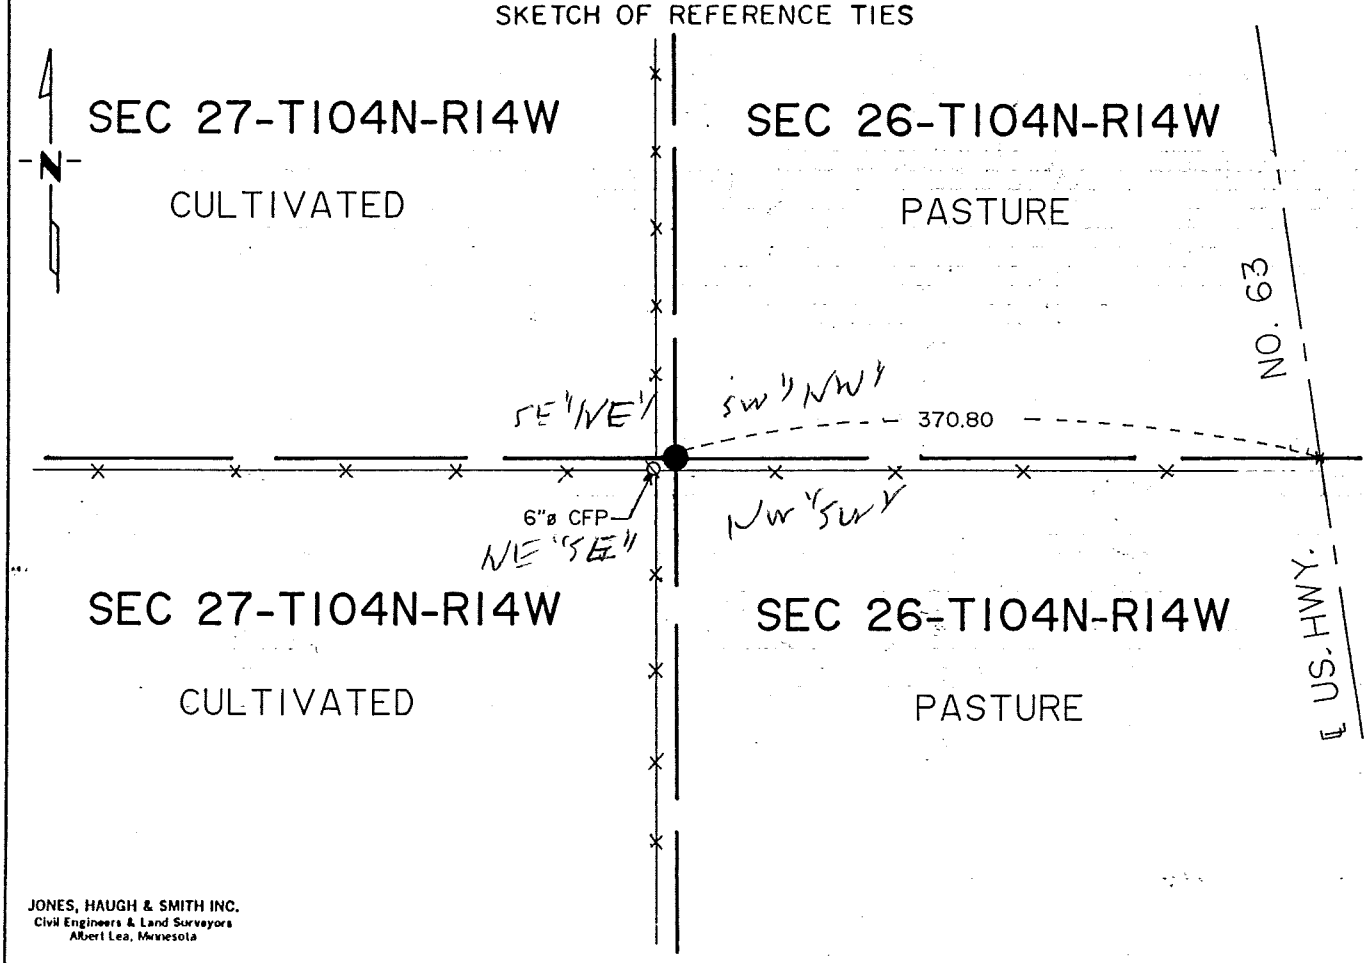

JONES, HAUGH & SMITH INC.
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

SIGNATURE 4-30-93 DATE

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☑ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of Mower

I hereby certify that this document was filed in the County Rec. office at 3 P.M. on the 4 day of May A.D., 1993

COUNTY RECORDER Chandra Engel

By Marlene Martin, Deputy

DOCUMENT NO. 420486

Bk 79 Mis Pg 338

M.H.D. FORM NO. 2105

BOOK 79 PAGE 338

STATEMENT OF EVIDENCE

W 1/4 corner Sec. 26-104-14

This corner was originally established by Deputy Surveyor John Taylor of the U.S. General Land Survey Office in 1853. The government notes show a wood post was set with a mound of earth and trench.

The following were contacted for section corner information:
Mower County Engineering Department
Mower County Recorder
Zenk Engineering
Tucker Land Surveying

The following information was obtained to support evidence of a perpetuation of the original public land survey corner.

1885 Clausen field notes indicate a government post at the E 1/4 corner of Section 27.

1959 Trunk Highway No. 63 right-of-way map shows monument inplace at fence intersection 384.0 feet west of centerline PI Sta 445+45.4 at an angle of 73°21' north-west from centerline tangent. No ties were taken.

1992 Jones, Haugh & Smith crew under the direction of John H. Schulte IV, uncovered a 3/4" diameter pipe capped RLS 6980 set by Douglas N. Betts, on the east side of a 6" diameter corner fence post at a 4-way fence intersection. A measurement was found of 383.77 feet west of centerline PI Sta 445 + 45.4 versus 384.0 as shown on the 1959 right-of-way map.

This monument fits occupation and road centerlines within the section and is accepted as best evidence of the original public land survey corner.

For electronic survey data and analysis contact the firm of Jones, Haugh & Smith Inc.

BOOK 79 PAGE 339