Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

N1/4 Corner of Section 30, Township 104N, Range 14W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch:

☒ On 10-17-91 (DATE) found a Harrison Cast iron monument over a 6" dia. concrete monument 3' below road surface

☒ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On _____ (DATE) placed a _____

SKETCH OF REFERENCE TIES

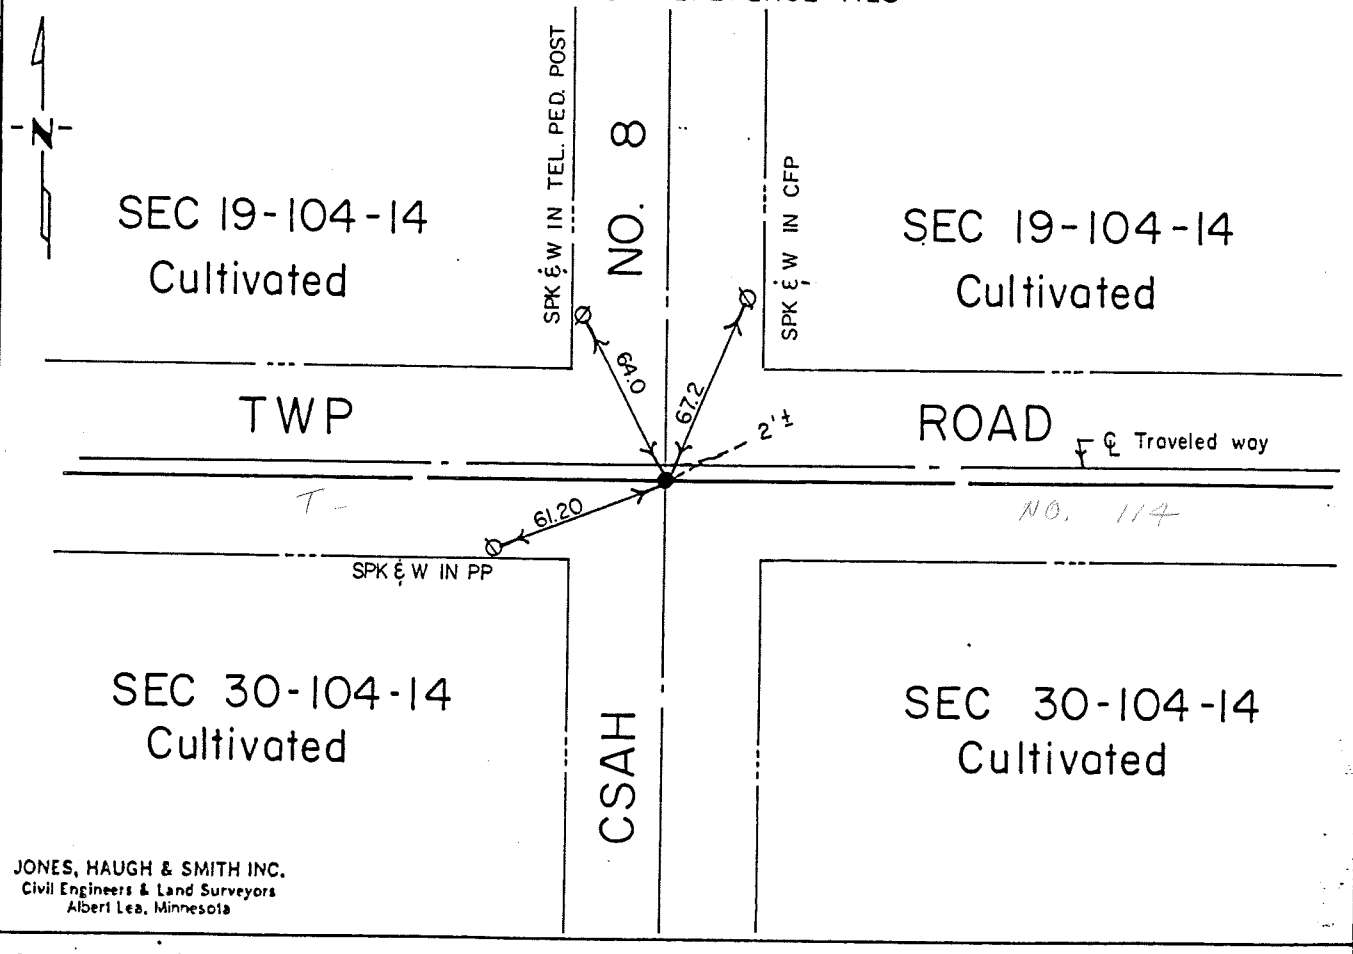

JONES, HAUGH & SMITH INC.
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

SIGNATURE _____ DATE 12-9-91

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☐ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of _____

I hereby certify that this document was filed in the County Rec. office at _____ .M. on the _____ day of _____ A.D., 19 ___

COUNTY RECORDER _____

By _____, Deputy

DOCUMENT NO. _____

M.H.D. FORM NO. 2105

STATEMENT OF EVIDENCE

N 1/4 corner Section 30-104-14

This corner was originally established by Deputy Surveyor John Taylor of the U.S. General Land Office in 1854. The government notes show a wood post was set with a mound of earth and trench.

The following were contacted for section corner information:
Mower County Recorder's Office
Mower County Highway Department
Zenk Engineering
Tucker Land Surveying

1930 Mower County Grading Plans show a concrete monument inplace on centerline centerline of north-south-east-west roads and the following ties were taken:
85.2' ENE to first fence post
29.5' SE to headwall
29.1' SW to headwall

1965 Book 'A' in the Office of the Mower County Engineer shows a concrete monument inplace and the following ties were taken:
60.6' SW to PP
85.2' ENE to first steel fence post
39.8' ESE to top south end 30" RCP
52.4' NE to TP

1991 Jones, Haugh & Smith Inc crew under the direction of John Schulte, County Surveyor, dug with the County backhoe on centerline centerline of north-south-east-west roads and uncovered a harrison cast iron monument. No records found to support who placed monument. Continued digging and found cast iron monument over a 6" diameter concrete monument 3 feet below road surface in virgin soil, which agrees with past records. Left concrete monument as found and reset cast iron monument over on road surface.

The monument found fits occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

For electronic survey data & analysis contact the firm of Jones, Haugh & Smith Inc.