Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

N1/4 Corner of Section 32, Township 104N Range 14W, 5TH P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch:

☐ On 5-27-93 (DATE) found a NOTHING

☐ left monument as found, ☐ lowered monument; ☐ removed monument (explain)

☐ On 6-30-93 (DATE) placed a 5/8"ø x 16" IRON CAPPED RLS NO. 13807

SKETCH OF REFERENCE TIES

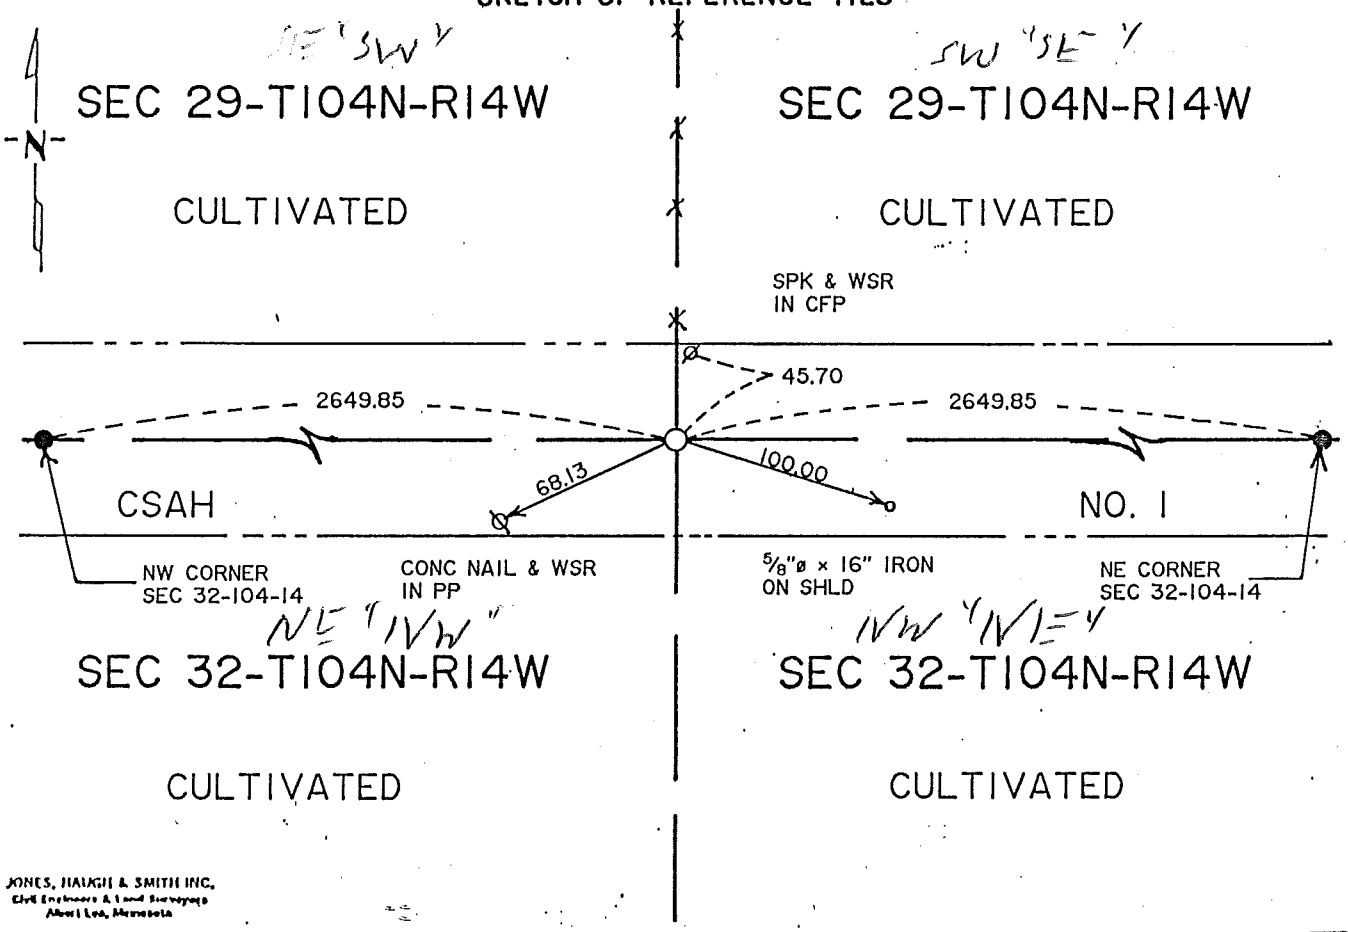

JONES, HAUGH & SMITH INC.
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

SIGNATURE _____ DATE 7-14-93

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☒ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of Mower

I hereby certify that this document was filed in the County Rec. office at 2 P.M. on the 15 day of July A.D., 1993

COUNTY RECORDER Charles Enge

By Marlene Martin, Deputy

DOCUMENT NO. 422858

BOOK 80 PAGE 327

M.H.D. FORM NO. 2105

STATEMENT OF EVIDENCE

N 1/4 corner Section 32-104-14

This corner was originally established by Deputy Surveyor John Taylor of the U.S. General Land Office in 1853. The government notes show a wood post was set with a mound of earth and trench.

The following were contacted for section corner information:
Mower County Recorder's Office
Mower County Highway Department
Zenk Engineering
Tucker Land Surveying

No information was obtained to support evidence of a perpetuation of the original public land survey corner.

1993 Jones, Haugh & Smith Inc crew under the direction of John Schulte, RLS 13807, dug with the county backhoe a 4'x4'x8' long hole on centerline of County State Aid Highway No. 1 and inline with fence running north. We found an old roadbed at a depth of three feet and continued digging into virgin soil and found no evidence of the original public land survey corner. Therefore we set a 5/8" diameter x 16" iron capped RLS 13807 at the midpoint between the northeast corner and the northwest corner of Section 32 and also on a straight line between said corners.

The monument set fits occupation lines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.