Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

N1/4 Corner of Section 33, Township 104N Range 14W, 5TH P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch:

☐ On 5-27-93 (DATE) found a NOTHING

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 6-30-93 (DATE) placed a 5/8"ø x 16" IRON CAPPED RLS NO. 13807

SKETCH OF REFERENCE TIES

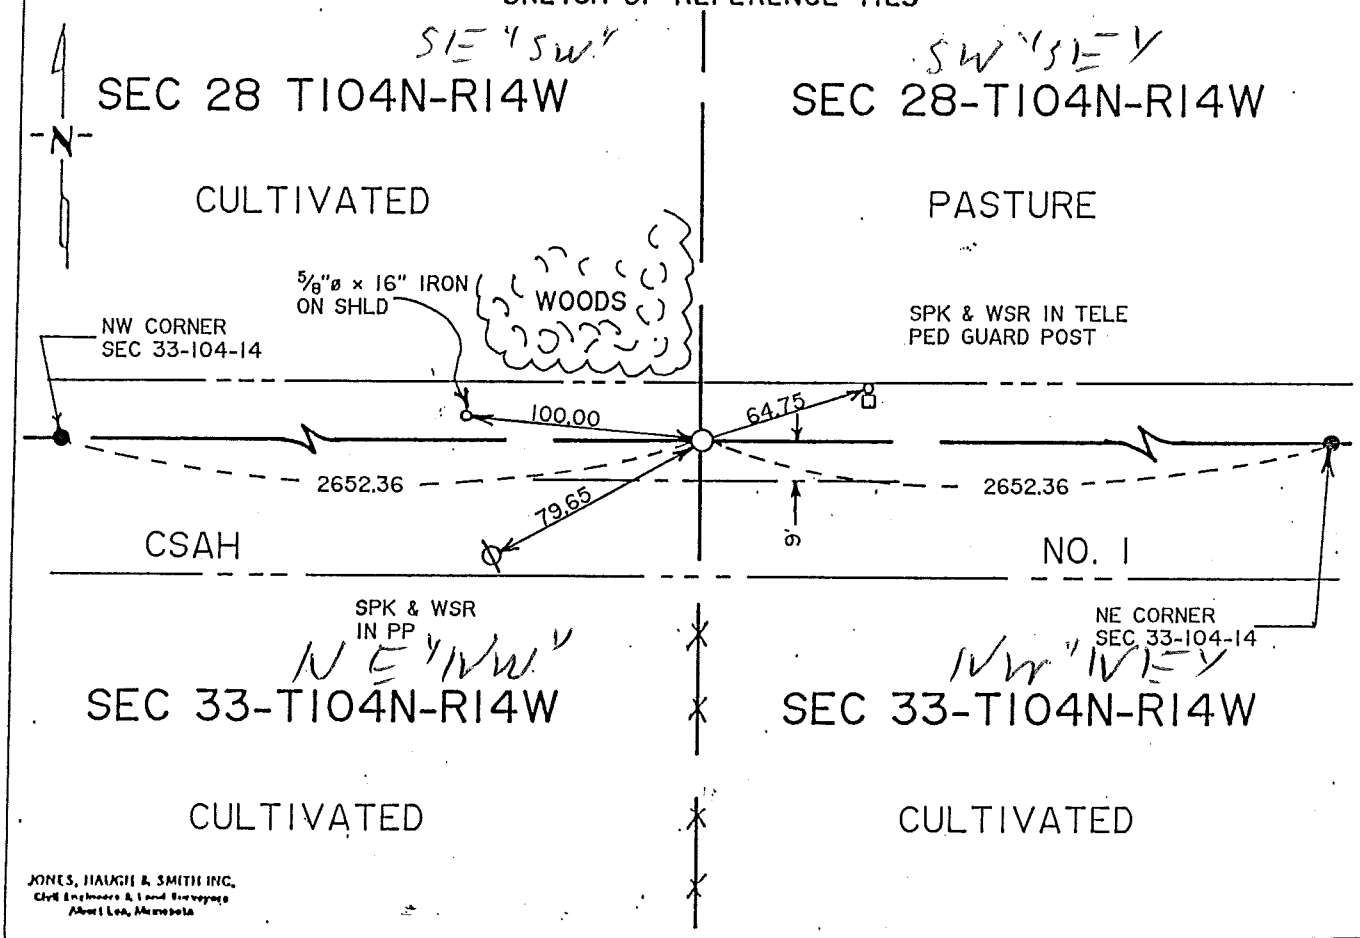

JONES, HAUGH & SMITH INC.
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

SIGNATURE _____ DATE 7-14-93

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☒ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of Mower

I hereby certify that this document was filed in the County Rec. office at 2:15 P.M. on the 15 day of July A.D., 1993

COUNTY RECORDER Charles Enger

By Marlene Martin, Deputy

DOCUMENT NO. 422860

Bk 80 Misc Pg 331

BOOK 80 PAGE 331

M.H.D. FORM NO. 2105

STATEMENT OF EVIDENCE

N 1/4 corner Section 33-104-14

This corner was originally established by Deputy Surveyor John Taylor of the U.S. General Land Office in 1853. The government notes show a wood post was set with a mound of earth and trench.

The following were contacted for section corner information:
Mower County Recorder's Office
Mower County Highway Department
Zenk Engineering
Tucker Land Surveying

No information was obtained to support evidence of a perpetuation of the original public land survey corner.

1993 Jones, Haugh & Smith Inc crew under the direction of John Schulte, RLS 13807, dug a 5'x4'x8' long hole 12 feet north of centerline of County State Aid Highway No. 1 and inline with line fence running south and east side of woods on the north side of County Road. We dug into virgin soil and continued digging down to clay and found no evidence of the original public land survey corner or perpetuation thereof. Therefore we set a 5/8" diameter x 16" iron capped RLS 13807 at the midpoint distance between the northeast and northwest corners of Section 33 and also on a straight line.

The monument set fits occupation lines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.