Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

NE Corner of Section 35, Township 104N, Range 14W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch:

☒ On 10-21-91 (DATE) found a 1/2" ø T iron over 6" dia. concrete monument

☒ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☒ On 10-21-91 (DATE) placed a Cast iron monument over concrete monument

SKETCH OF REFERENCE TIES

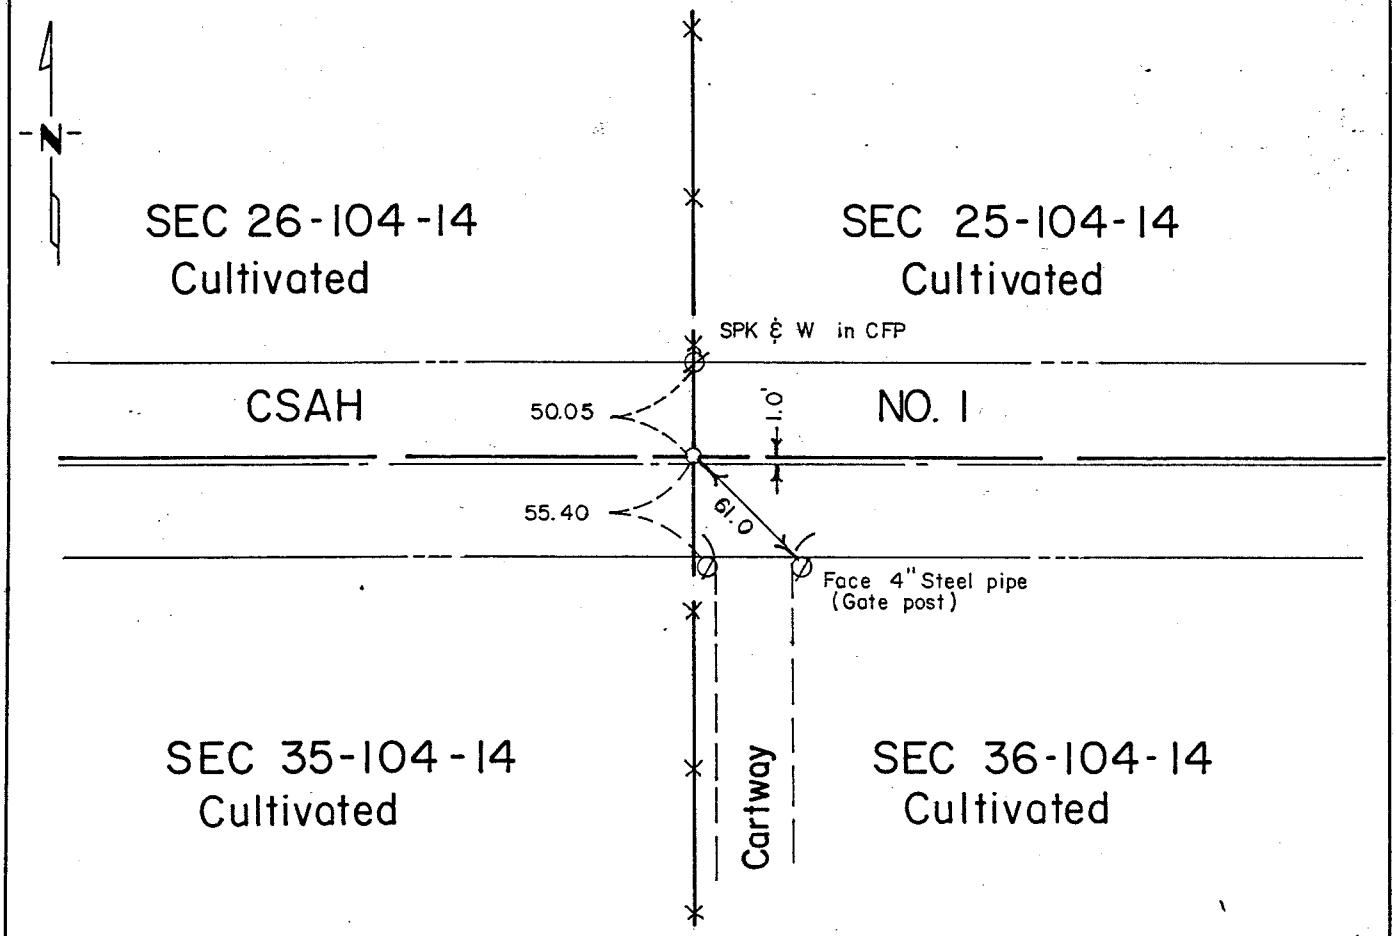

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

SIGNATURE _____ DATE 11-11-91

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☒ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER

County of _____

I hereby certify that this document was filed in the County Rec. office at _____ .M. on the ____ day of _____ A.D., 19__

COUNTY RECORDER _____

By _____, Deputy

DOCUMENT NO. _____

M.H.D. FORM NO. 2105

STATEMENT OF EVIDENCE

NE corner Section 35-104-14

This corner was originally established by Deputy Surveyor John Taylor of the U.S. General Land Office in 1853. The government notes show a wood post was set with a mound of earth and trench.

The following were contacted for section corner information:
Mower County Highway Dept
Mower County Recorder's Office
Zenk Engineering
Tucker Land Surveying

1966 Sandstone, RLS 5325, uncovered concrete monument and set "T" iron over monument on road surface. The following ties were taken:
51.84' NW to X nails in brace post
49.54' N to X nails in CFP
51.94' S to X nails in CFP
71.11' SE to X nails in RR tie

1975 Wallace, Holland & Associates uncovered "T" iron and recorded notes in Book "A" in the County Engineer's office.

1991 Jones, Haugh & Smith Inc crew dug with County backhoe on centerline east-west road in line with fence north-south and uncovered a 1/2" 'T' iron over a 6" diameter concrete monument with 3/4" diameter iron cast in center, 3 feet deep in virgin soil. Left concrete monument as found and set cast iron monument over concrete monument.

The monument fits occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.