Index No. ____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

NW Corner of Section 8, Township 104N, Range 14W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch:

☒ On 10-17-91 (DATE) found a Harrison cast iron over a MHD capped Telspar post

☒ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On _____ (DATE) placed a _____

SKETCH OF REFERENCE TIES

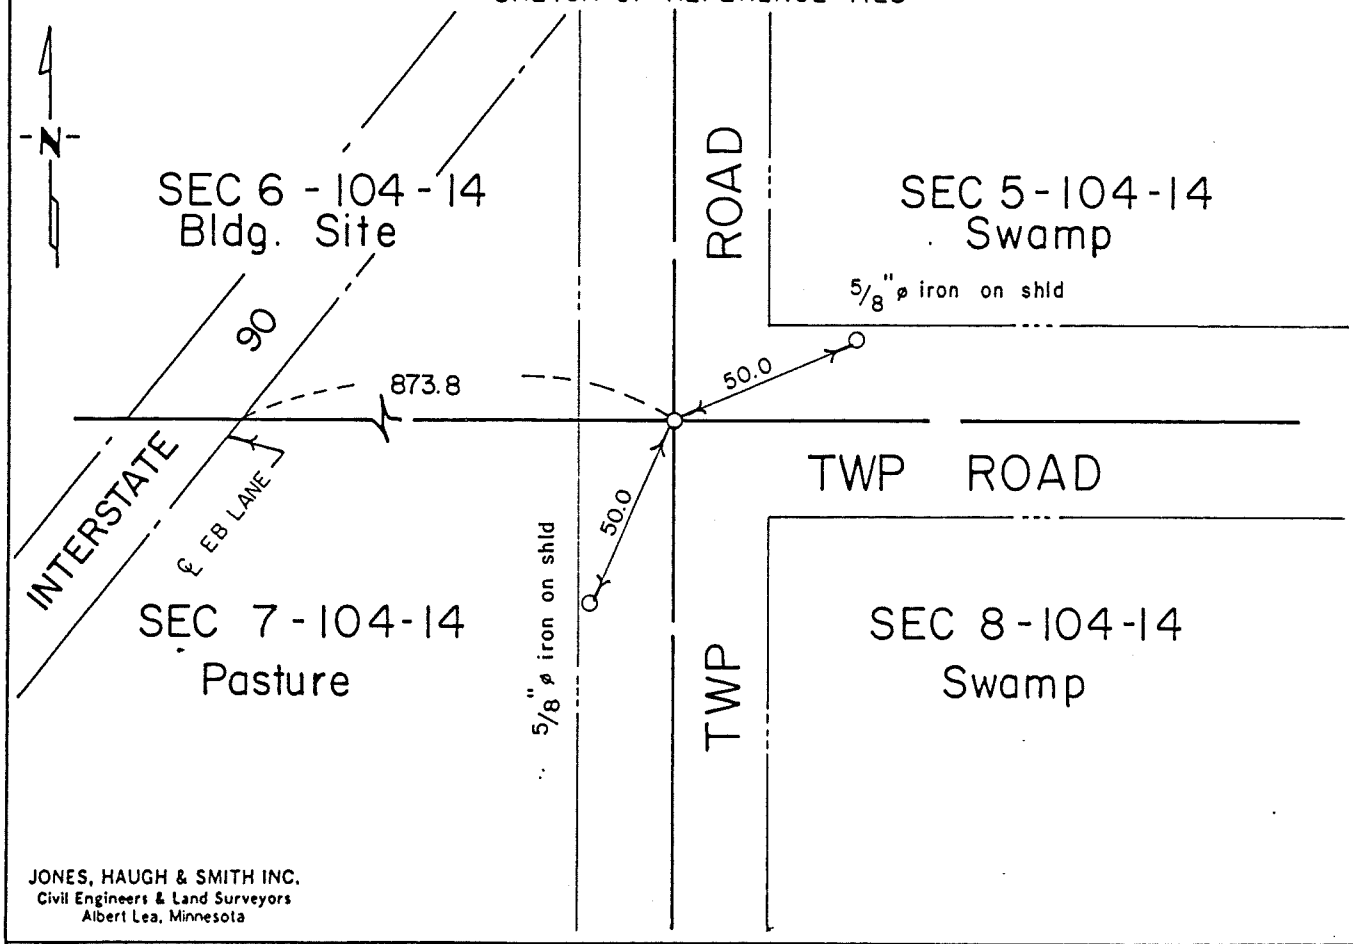

JONES, HAUGH & SMITH INC.
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

_____ 1-6-92
SIGNATURE DATE

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☑ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of _____

I hereby certify that this document was filed in the County Rec. office at _____ .M. on the _____ day of _____ A.D., 19__

COUNTY RECORDER _____

By _____, Deputy

DOCUMENT NO. _____

M.H.D. FORM NO. 2105

STATEMENT OF EVIDENCE

NW corner Section 8-104-14

This corner was originally established by Deputy Surveyor John Taylor of the U.S. General Land Office in 1854. The government notes show a wood post was set with a mound of earth and trench.

The following were contacted for section corner information:
Mower County Recorder's Office
Mower County Highway Department
Zenk Engineering
Tucker Land Surveying
Minnesota Dept of Transportation

1956 Minnesota Dept of Transportation I-90 right-of-way map show a boulder inplace on centerline centerline north-south-east roads 873.8 feet east of the centerline of north bound lane from a point where the north line of Section 7 intersects centerline.

1959 Book 'A' in the Office of the Mower County Engineer shows a concrete monument over a field stone and the following ties were taken:
36.0' NE to top CM culvert
38.0' SE to top CM culvert
in line with centerline Township Road east

1991 Jones, Haugh & Smith Inc crew under the direction of John Schulte, County Surveyor, dug with the County backhoe and uncovered a harrison MHD cast iron monument over a MHD capped telspar post. Left all monuments as found.

The monument found fits occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

For electronic survey data and analysis contact the firm of Jones, Haugh & Smith Inc.

I TIE BOOK P. 9 #103

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER


N 1/4 Corner to Section 10 Township 104N Range 14W No. 1

STATE OF MINNESOTA,

County of Mower - Olmsted S.S.

I hereby certify that on the 21st day of November, 1966, that I, Leonard Sankstone, a Registered Land Surveyor, found the north quarter corner of Section 10, T104N, R14W which was evidenced by 8" dia x 18" stone monument, 48" below grade. Top of stone was chiseled flat, and I further certify that to perpetuate the location of such corner I did, at the exact location thereof, place a permanent marker consisting of 3"x20" cast iron ferro magnetic monument, 3" below grade. I further certify that I established 6 references or witness monuments consisting of 4 trees & 2 fence posts, which reference or witness monuments are located in the manner following.

N 36.29 ft. Cor.Fence Post(N&B cap)
NNE 58.40 ft. 42" Maple (N&B cap)
E 35.07 ft. 24" B. Oak (N&B cap)
SE 39.72 ft. 6" B. Oak (N&B cap)
SSW 30.20 ft. 24" Twin Oak (N&B cap)
SW 53.34 ft. Cor.Fence Post(N&B cap)
(2 feet S'ly E-W township road, prol. S'ly. Fence line N'ly.)

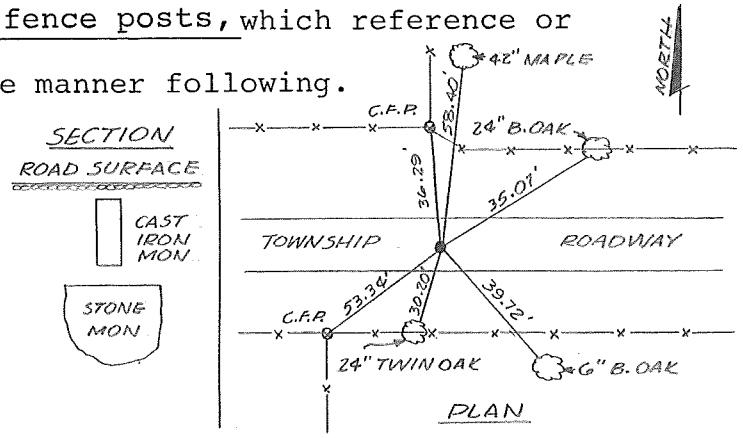

Dated at Rochester, Minnesota, this 1ST day of DECEMBER, 1966.

Distance to NW cor. Sec. 10 = 2656.45'
Distance to NE cor. Sec. 10 = 2639.29'

Leonard Sankstone

Registered Land Surveyor No. 5325

OFFICE OF THE REGISTER OF DEEDS

County of Mower

280004

I hereby certify that the within instrument was filed in this office for record on the 8 day of Dec A.D., 1966 at 11 am in Book 25 of Misc page 133

Paul Meyer
Register of Deeds

Clark Erp D.p.

BOOK 25 PAGE 133

94

1.85

cc of Mercury

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

NW Corner to Section 10 Township 104N Range 14W No. 2

STATE OF MINNESOTA,

County of Mower - Olmsted S.S.

I hereby certify that on the 21st day of November, 19 66,

that I, Leonard Sankstone, a Registered Land Surveyor, found

the Northwest corner of Section 10, T104N, R14W, which was

evidenced by a 18" dia x 12" sandstone monument 72" below grade; top of stone was chiseled flat. Stone was witnessed by a 1"x18" iron pipe on the north, fence post steel butt on the south and a steel splitting wedge on top, and I further certify that to perpetuate the location of such corner I did, at the exact location thereof, place


a permanent marker consisting of 1"x36" iron rod, 6" below grade.


I further certify that I established 4 references or witness

monuments consisting of 2 fence posts, 1 tree, 1 telephone pole, which reference or witness monuments are located in the manner following.

N 32.50 ft. Cor.Fence Post(N&B cap)
E 42.65 ft. 18" Elm (N&B cap)
W 127.09 ft. Telephone Pole(N&B cap)
NE 45.90 ft. Steel Fence Post (3 chisel marks)

(1.0' S'ly E-W town road
2.0' E'ly fence line N'ly)



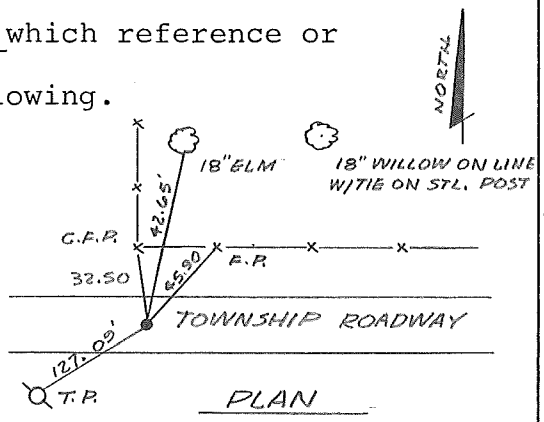

Dated at Rochester, Minnesota, this 1st day of December, 19 66.

Distance to N1/4 corner
Section 10 = 2656.45 ft.

Leonard Sankstone

Leonard Sankstone

Registered Land Surveyor No. 5325

OFFICE OF THE REGISTER OF DEEDS

County of _____

I hereby certify that the within instrument was filed in this office for record on the _____ day of _____ A.D., 19____.

Office of Register of Deeds } ss. 280005
County, Minnesota }
I hereby certify that the within instrument was filed for record on the 8 day of Dec 19 66 at 11 o'clock a M. and duly recorded in Book 25 of Misc on page 134
Register of Deeds
By _____ Deputy

_____
Register of Deeds

05



2

10

"I" TIR Book P. 103

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER


NE Corner to Section 10 Township 104N Range 14W No. 3

STATE OF MINNESOTA,

County of Mower - Olmsted S.S.

I hereby certify that on the 21st day of November, 1966 that I, Leonard Sankstone, a Registered Land Surveyor, ~~found~~ set the Northeast corner of Section 10, T104N, R14W, which was evidenced by prior survey in 1875 and 1881 by Hunter, County Surveyor, Olmsted County, and I further certify that to perpetuate the location of such corner I did, at the exact location thereof, place a permanent marker consisting of 3"x20" cast iron ferro magnetic monument, 6" below grade. I further certify that I established 8 references or witness monuments consisting of 3 pipe, 2 fence posts, 2 R/W markers, 1 power pole, which reference or witness monuments are located in the manner following.

NE 56.94 ft. 3"Iron Pipe Fence Post(top ctr)
ESE 137.12 ft. 1" Iron Pipe (top ctr)
SE 42.09 ft. 1" Iron Pipe (top ctr)
'E 104.36 ft. 1" Iron Pipe (top ctr)
SW 77.65 ft. Power Pole (N&B cap)
SW 70.20 ft. Hwy R/W Marker(top ctr)
SW 68.61 ft. Cor. Fence Post(N&B cap)
NW 76.48 ft. Hwy R/W Marker (top c.)
(15.5' E of ℄ U.S. Hwy. 63
9.0' S of ℄ Town road) Approx. Loc.

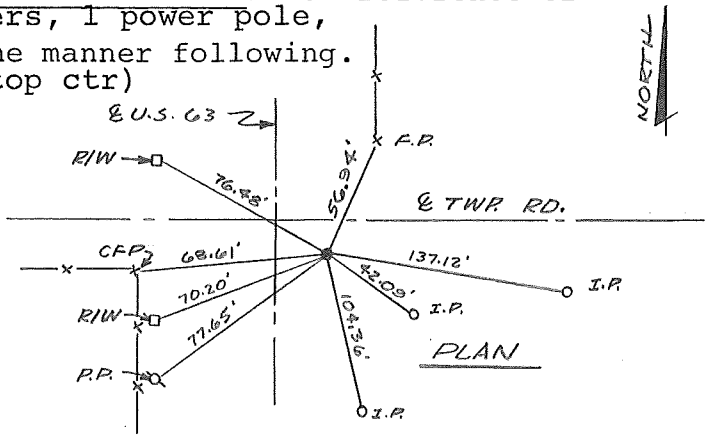

Dated at Rochester, Minnesota, this 1st day of December, 1966.

Distance to N1/4 Sec. 10 = 2639.29
Distance to E1/4 Sec. 3 = 2655.18
Distance to Railroad = 1415.20

Leonard Sankstone

Registered Land Surveyor No. 5325

OFFICE OF THE REGISTER OF DEEDS

County of _____

I hereby certify that the within instrument was filed in this office for record on the _____ day of _____ A.D., 19____.

Register of Deeds

Office of Register of Deeds (Co. Seal) 280006
I hereby certify that the within instrument was filed for record on the 3 day of Dec 64
at 11 o'clock A.M. and duly recorded in Book 25
of Misc on page 135.
Register of Deeds
By _____, Deputy

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

NW Corner of Section 14, Township 104N Range 14W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch

☐ On 09/04/2003 (DATE) found a 1/2" IRON

☒ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On – (DATE) placed a –

SKETCH OF REFERENCE TIES

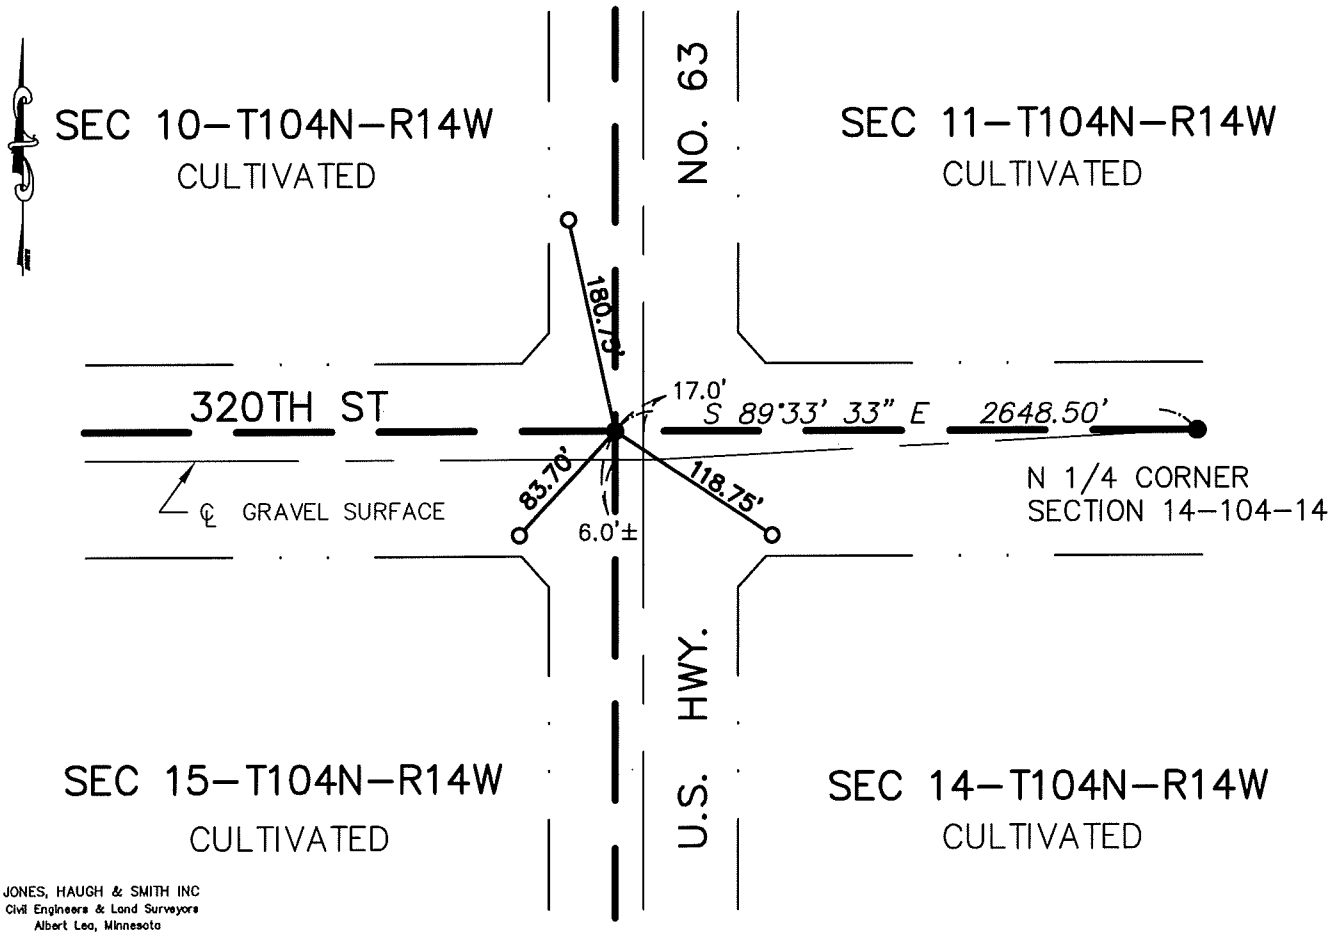

JONES, HAUGH & SMITH INC
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein were prepared by me or under my direct supervision.

SIGNATURE _____ DATE 10-31-03

Registration No. 13807

☒ Land Surveyor, ☐ Professional Engineer

☒ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER

County of _____

I hereby certify that this document was filed in the County Rec. office at _____ .M. on the _____ day of _____ A.D., 20___

COUNTY RECORDER _____

By _____, Deputy

DOCUMENT NO. _____

M.H.D. FORM NO. 2105

NW Corner Section 14-T104N-R14W

Deputy Surveyor John Taylor of the U.S. General Land Office originally established this corner in 1853. The government notes show a wood post was set with mound of earth and trench.

The following were contacted for section corner information.

Mower County Highway Dept.
Mower County Recorder
Fangman Land Surveying

MN/DOT road plans for U.S. Highway #63 show the Northwest Corner of Section 14, 17.0 feet West of centerline.

2003 Jones Haugh and Smith crew, under direction of John Schulte, Mower County Surveyor RLS 13807. Searched the area with magnetic locator. Dug by hand and found a ½" iron 17.0 feet West of the centerline of Highway 63 as shown on road plan.

The monument is in agreement with the record and is accepted as best evidence of a perpetuation of the original public land survey corner.

For electronic survey data and analysis, contact the firm of Jones, Haugh and Smith Inc.

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

N 1/4 Corner of Section 14, Township 104N Range 14W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch

☐ On 09/04/2003 (DATE) found a 1/2" IRON

☒ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On _____ (DATE) placed a –

SKETCH OF REFERENCE TIES

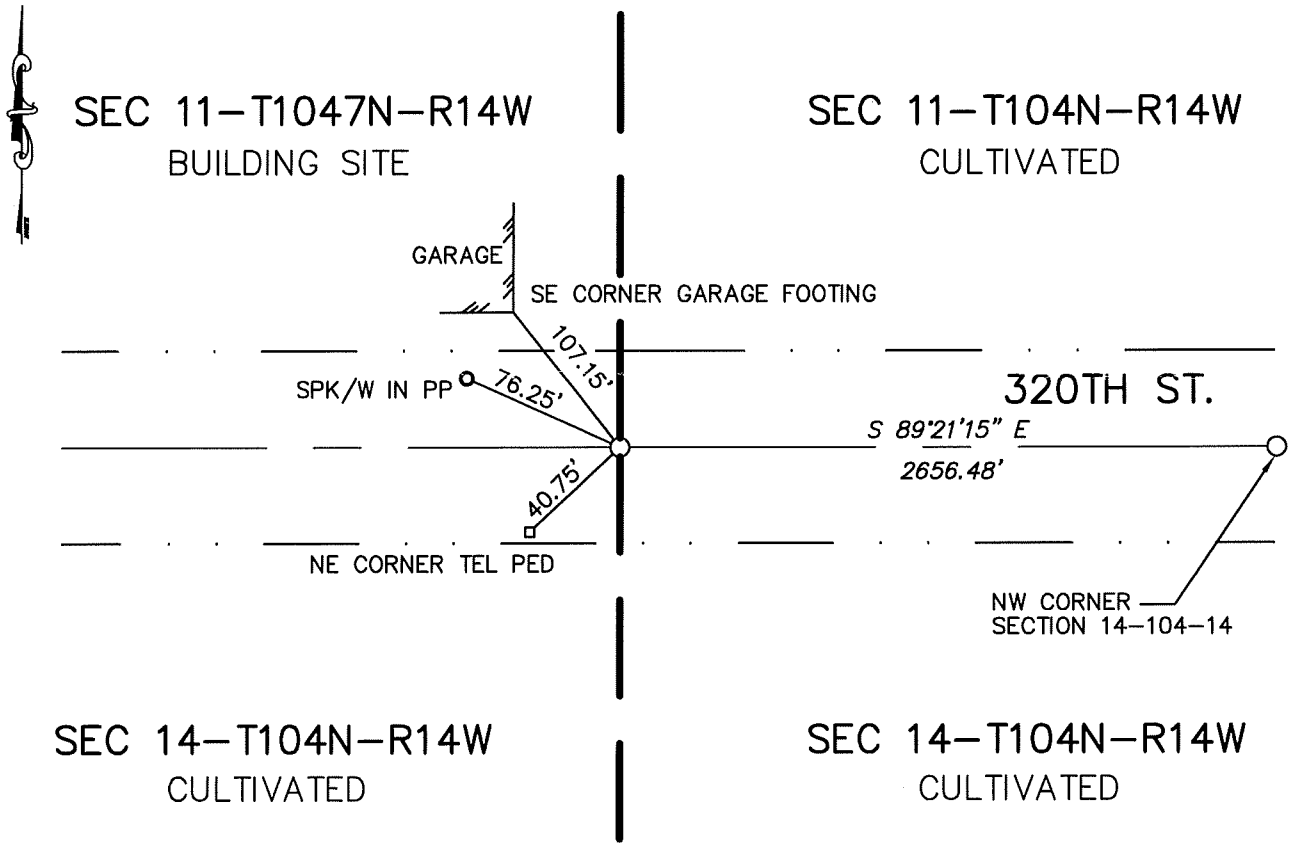

JONES, HAUGH & SMITH INC
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein were prepared by me or under my direct supervision.

SIGNATURE _____ DATE 10-31-03

Registration No. 13807

☒ Land Surveyor, ☐ Professional Engineer

☒ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER

County of _____

I hereby certify that this document was filed in the County Rec. office at _____ .M. on the _____ day of _____ A.D., 20___

COUNTY RECORDER _____

By _____, Deputy

DOCUMENT NO. _____

M.H.D. FORM NO. 2105

N 1/4 Corner Section 14-T104N-R14W

Deputy Surveyor John Taylor of the U.S. General Land Office originally established this corner in 1853. The government notes show a wood post was set with mound of earth and trench.

The following were contacted for section corner information.

Mower County Highway Dept.
Mower County Recorder
Fangman Land Surveying

Mower County records show a ½" iron pipe at the corner.

1987 Fangman Land Surveying located a ½" iron pipe at the corner.

2003 Jones, Haugh and Smith crew, under direction of John Schulte, Mower County Surveyor RLS 13807, dug at the location of the locator signal and located a ½" iron pipe 0.60 feet deep. No other evidence of public land survey corner was found.

The monument is in agreement with the record and is accepted as best evidence of a perpetuation of the original public land survey corner.

For electronic survey data and analysis, contact the firm of Jones, Haugh and Smith Inc.

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

E 1/4 Corner of Section 14, Township 104N Range 14W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch

☐ On 09/04/2003 (DATE) found a 3/4" IRON PIPE

☒ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On _____ (DATE) placed a _____

SKETCH OF REFERENCE TIES

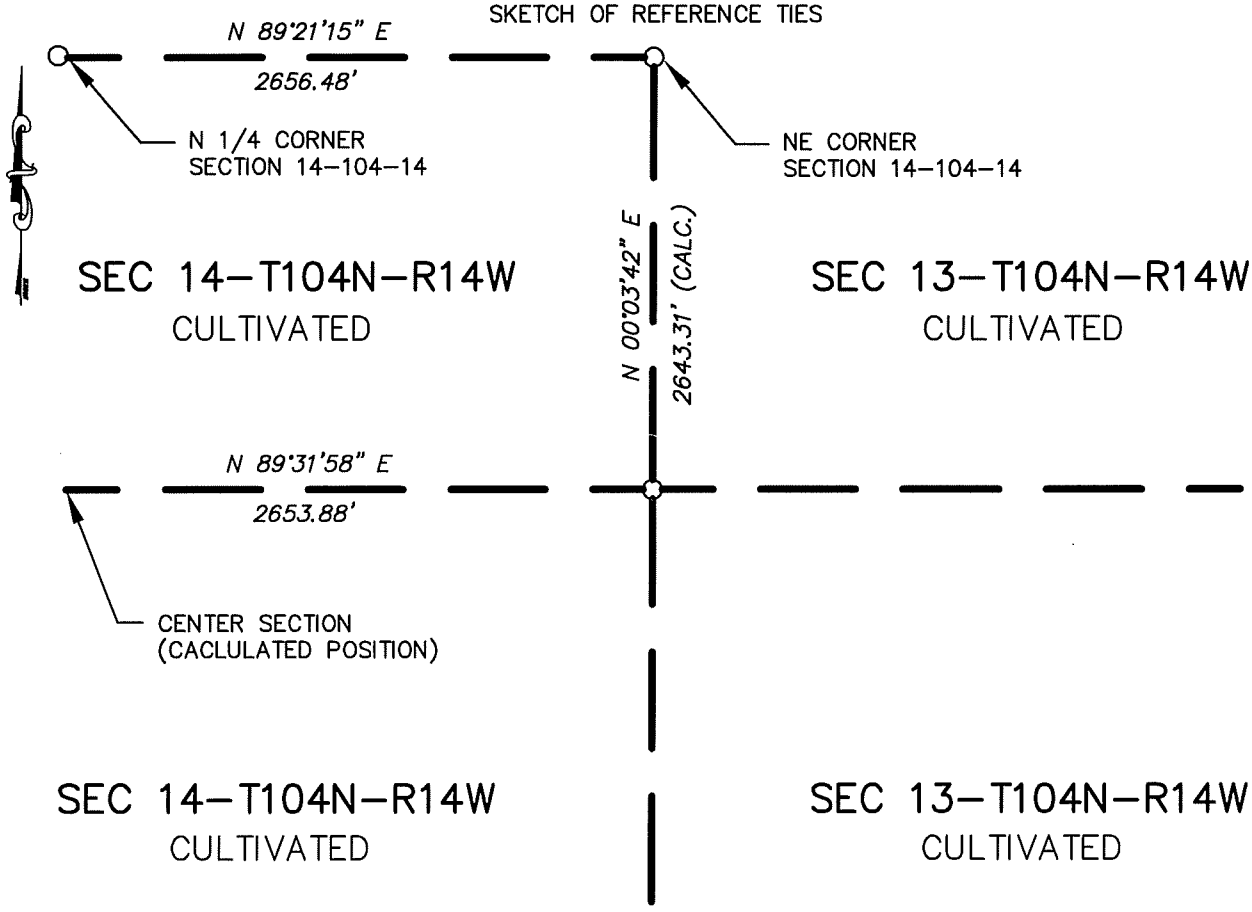

JONES, HAUGH & SMITH INC
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein were prepared by me or under my direct supervision.

SIGNATURE _____ DATE 10-31-03

Registration No. 13807

☒ Land Surveyor, ☐ Professional Engineer

☒ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER

County of _____

I hereby certify that this document was filed in the County Rec. office at _____ .M. on the _____ day of _____ A.D., 20___

COUNTY RECORDER _____

By _____, Deputy

DOCUMENT NO. _____

M.H.D. FORM NO. 2105

E 1/4 Corner Section 14-T104N-R14W

Deputy Surveyor John Taylor of the U.S. General Land Office originally established this corner in 1853. The government notes show a wood post was set with mound of earth and trench.

The following were contacted for section corner information.

Mower County Highway Dept.
Mower County Recorder
Fangman Land Surveying

1987 Fangman Land Surveying placed a ¾" iron pipe capped #14888.

2003 Jones Haugh and Smith crew, under direction of John Schulte, Mower County Surveyor RLS 13807 searched area with metal locator and located a ¾" iron pipe. Left monument as found.

The monument is in agreement with the record and is accepted as best evidence of a perpetuation of the original public land survey corner.

For electronic survey data and analysis, contact the firm of Jones, Haugh and Smith Inc.

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

S 1/4 Corner of Section 14, Township 104N Range 14W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch

☐ On 09/04/2003 (DATE) found a 3/4" PIPE

☒ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On _____ (DATE) placed a _____

SKETCH OF REFERENCE TIES

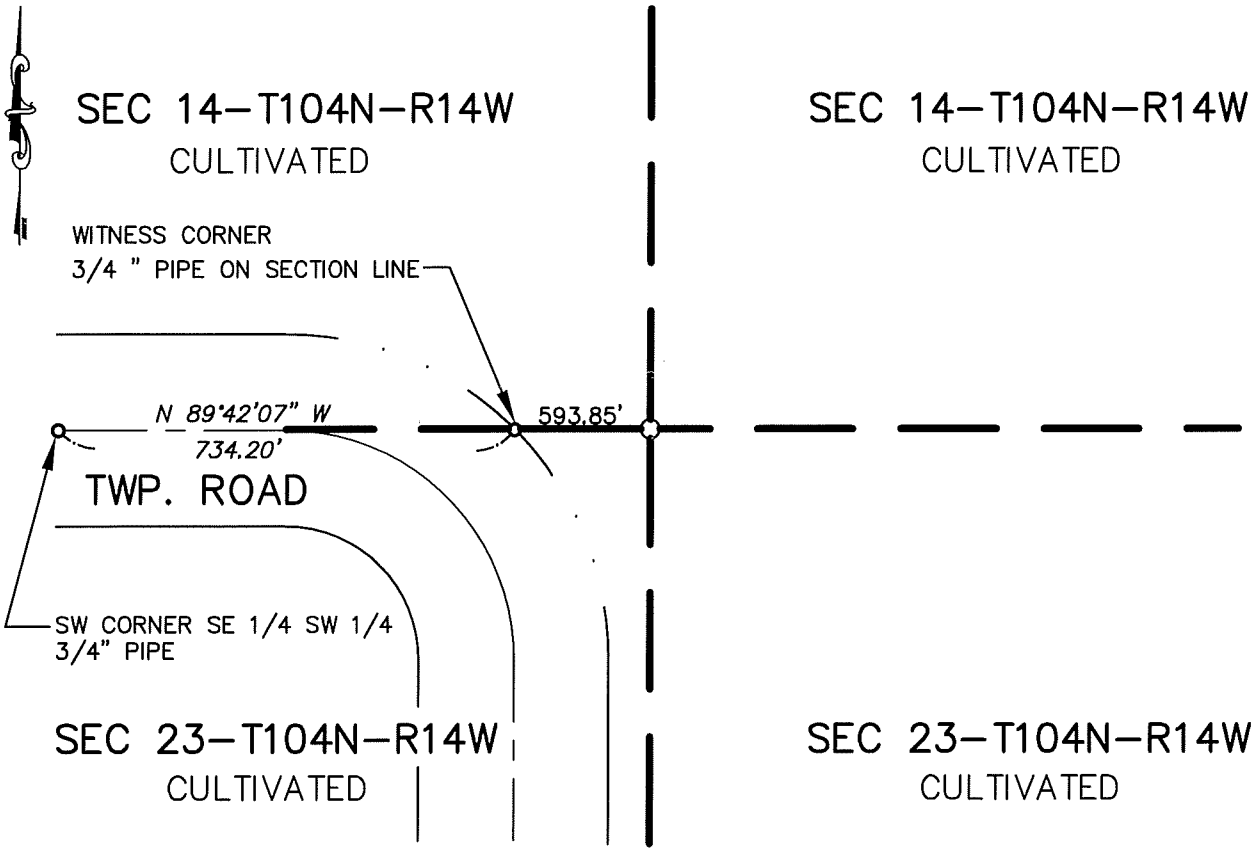

JONES, HAUGH & SMITH INC
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein were prepared by me or under my direct supervision.

_____ 10-31-03
SIGNATURE DATE

Registration No. 13807

☒ Land Surveyor, ☐ Professional Engineer

☒ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of _____

I hereby certify that this document was filed in the County Rec. office at _____ .M. on the _____ day of _____ A.D., 20___

COUNTY RECORDER _____

By _____, Deputy

DOCUMENT NO. _____

M.H.D. FORM NO. 2105

S 1/4 Corner Section 14-T104N-R14W

Deputy Surveyor John Taylor of the U.S. General Land Office originally established this corner in 1853. The government notes show a wood post was set with mound of earth and trench.

The following were contacted for section corner information.

Mower County Highway Dept.
Mower County Recorder
Fangman Land Surveying

1987 Fangman Land Surveying computed the location of this corner using existing occupation within the section. The corner is located in a cultivated field and was not set. The crew placed a ¾" pipe on the section line 593.85 feet west of the corner.

2003 Jones, Haugh and Smith crew, under direction of John Schulte, Mower County Surveyor RLS 13807, dug by hand and recovered witness corner.

The monument is in agreement with the record and is accepted as best evidence of a perpetuation of the original public land survey corner.

For electronic survey data and analysis, contact the firm of Jones, Haugh and Smith Inc.

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

W 1/4 Corner of Section 14, Township 104N Range 14W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch

☐ On 09/04/2003 (DATE) found a 1"X20" IRON

☒ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 07/06/1987 (DATE) placed a 1"X20" IRON

SKETCH OF REFERENCE TIES

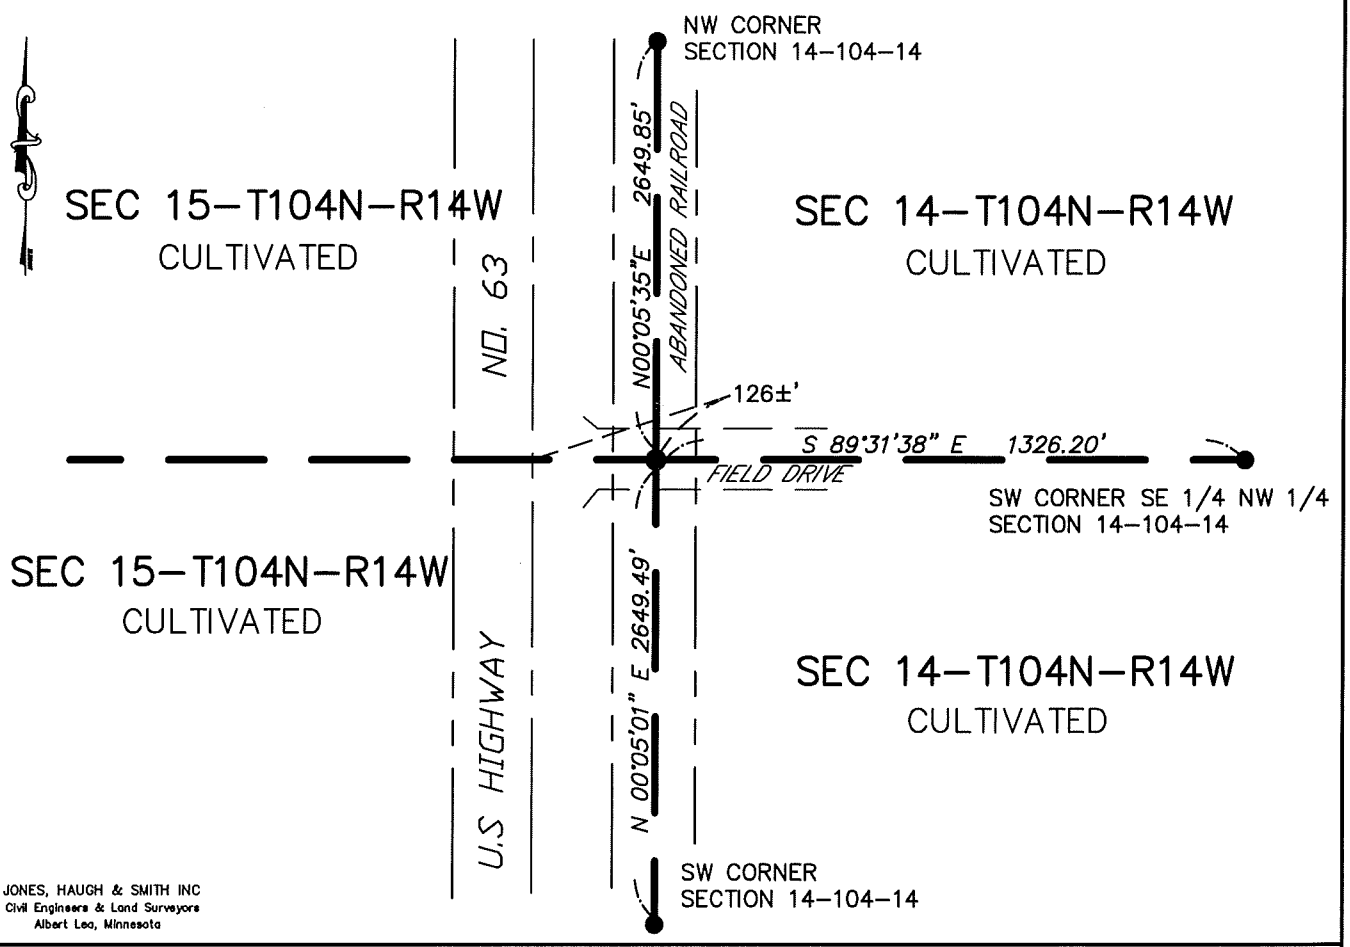

JONES, HAUGH & SMITH INC
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein were prepared by me or under my direct supervision.

_____ 10-31-03
SIGNATURE DATE

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☒ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of _____

I hereby certify that this document was filed in the County Rec. office at _____ .M. on the _____ day of _____ A.D., 20___

COUNTY RECORDER _____

By _____, Deputy

DOCUMENT NO. _____

M.H.D. FORM NO. 2105

W 1/4 Corner Section 14-T104N-R14W

Deputy Surveyor John Taylor of the U.S. General Land Office originally established this corner in 1853. The government notes show a wood post was set with mound of earth and trench.

The following were contacted for section corner information.

Minnesota Department of Transportation
Mower County Highway Dept.
Mower County Recorder
Fangman Land Surveying

U.S. Highway Number 63 road plan shows the corner projected P.O.S.T 552+92.4

1987 Fangman Land Surveying placed a 1" x 20" iron at the west quarter corner of the section.

2003 Jones, Haugh and Smith crew, under direction of John Schulte, Mower County Surveyor RLS 13807, dug at the location of locator signal and located a 1" iron 126 feet east of U.S. Highway Number 63 centerline. Left as found.

The monument is in agreement with the record and is accepted as best evidence of a perpetuation of the original public land survey corner.

For electronic survey data and analysis, contact the firm of Jones, Haugh and Smith Inc.

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

N 1/4 Corner of Section 16, Township 104N Range 14W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch

☐ On _____ (DATE) found a _____

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 10/23/2000 (DATE) placed a 3/4" I.D. PIPE

SKETCH OF REFERENCE TIES

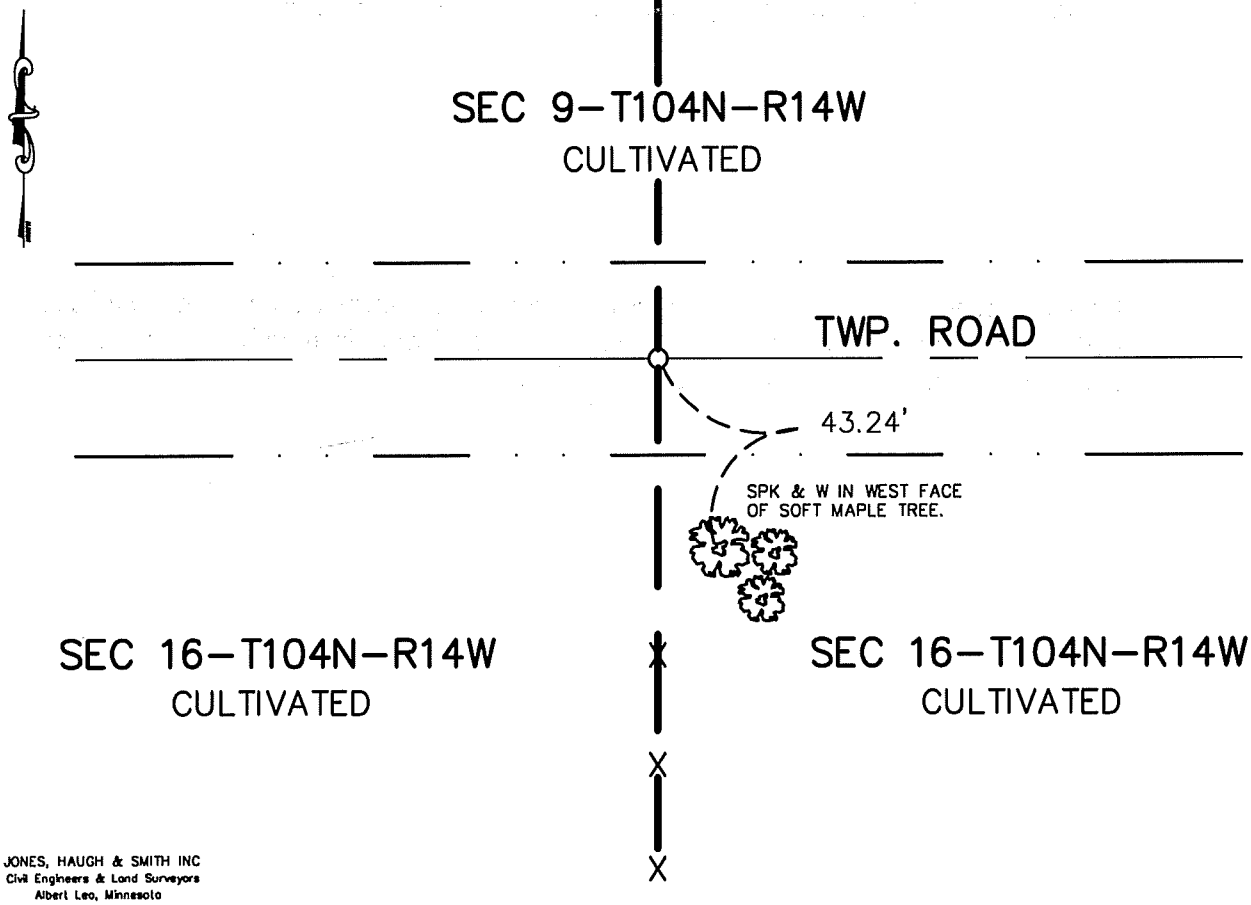

JONES, HAUGH & SMITH INC
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein were prepared by me or under my direct supervision.

_____ (SIGNATURE) 11-14-00 (DATE)

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☒ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of _____

I hereby certify that this document was filed in the County Rec. office at _____ .M. on the _____ day of _____ A.D., 19___

COUNTY RECORDER _____

By _____, Deputy

DOCUMENT NO. _____

M.H.D. FORM NO. 2105

N 1/4 Cor Sec 16-104-14

Deputy Surveyor John Taylor of the U.S. General Land Office originally established this corner in 1853. The government notes show a wood post was set with mound of earth and trench.

The following were contacted for section corner information.

Mower County Highway Dept.
Mower County Recorder

No record of this corner was obtained from the above mentioned offices.

2000 Jerry and Greg Schwarz dug with a backhoe, a hole 6'x10'x3½' deep at the intersection of centerline of east west Twp. Road and fence line running south. Found nothing.
Set a ¾" I.D. pipe on centerline of Twp. Road inline with fence line running south. Took new ties.

The monument fits occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

For electronic survey data and analysis, contact the firm of Jones, Haugh and Smith Inc.

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

W 1/4 Corner of Section 17, Township 104N, Range 14W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch:

☒ On 10-22-91 (DATE) found a 3/4" ø x 30" long iron shaft over remains of wood post

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☒ On 10-22-91 (DATE) placed a Cast iron monument over shaft

SKETCH OF REFERENCE TIES

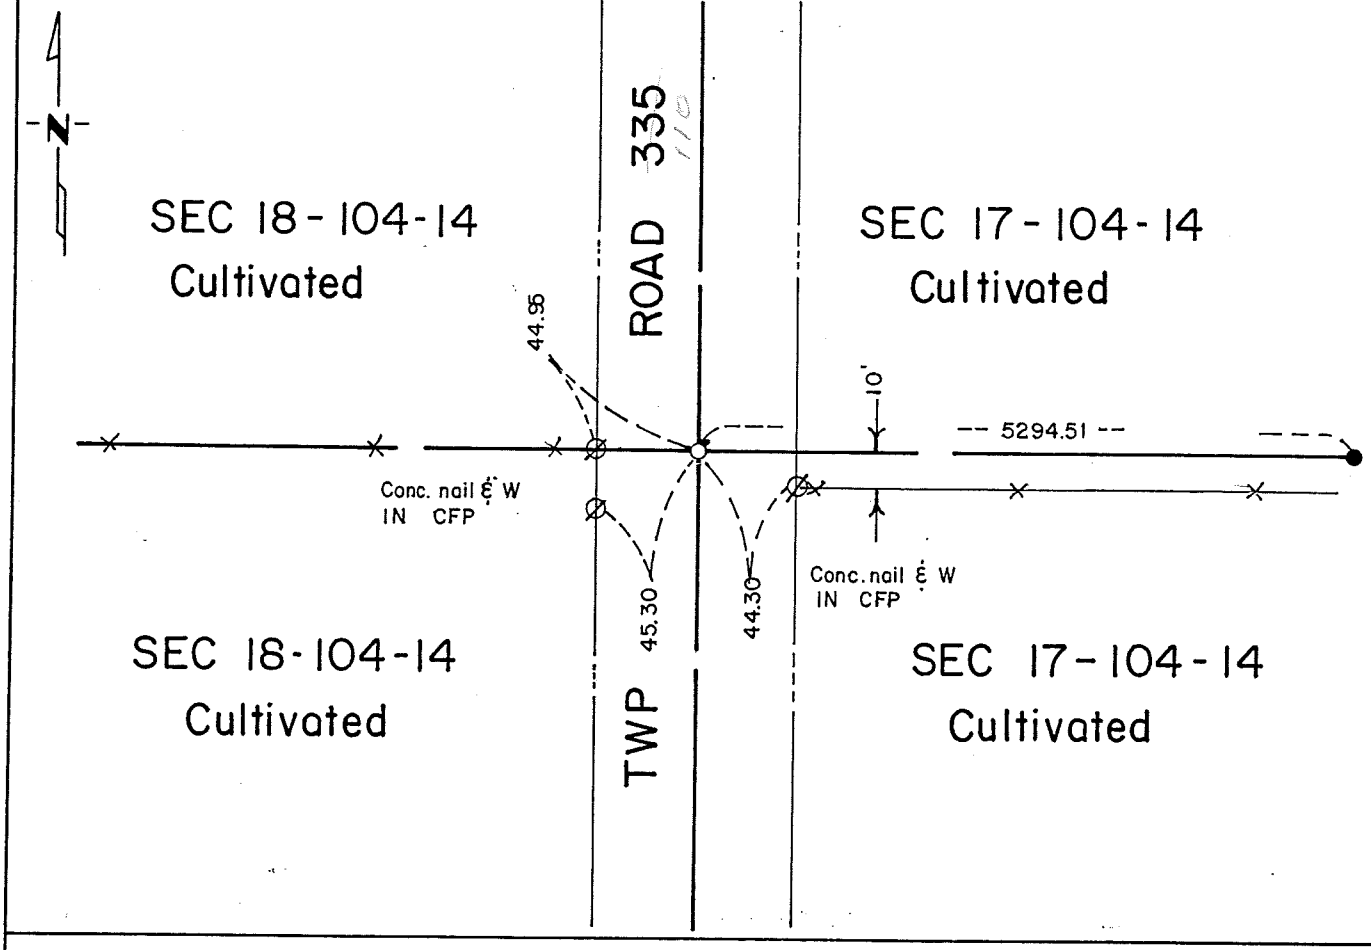

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

SIGNATURE _____ DATE 11-11-91

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☑ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER

County of _____

I hereby certify that this document was filed in the County Rec. office at _____ .M. on the _____ day of _____ A.D., 19__

COUNTY RECORDER _____

By _____, Deputy

DOCUMENT NO. _____

M.H.D. FORM NO. 2105

STATEMENT OF EVIDENCE

W 1/4 corner Section 17-104-14

This corner was originally established by Deputy Surveyor John Taylor of the U.S. General Land Office in 1853. The government notes show a wood post was set with a mound of earth and trench.

The following were contacted for section corner information:
Mower County Highway Dept
Mower County Recorder's Office
Zenk Engineering
Tucker Land Surveying

No information was obtained to support evidence of a perpetuation of the original public land survey corner.

1991 Jones, Haugh & Smith Inc crew dug with the County backhoe on centerline north-south road in line with fence west and uncovered a 3/4" diameter x 30" long iron shaft over the remains of old wood post 3 feet deep in virgin soil. Left 3/4" diameter iron as found and set cast iron monument over shaft 0.5 feet below road grade.

The monument fits occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

SE Corner of Section 17, Township 104N, Range 14W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch:

☒ On 10-21-91 (DATE) found a 1/2" ø x 30" pipe

☒ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☒ On 10-21-91 (DATE) placed a Cast iron monument over pipe

SKETCH OF REFERENCE TIES

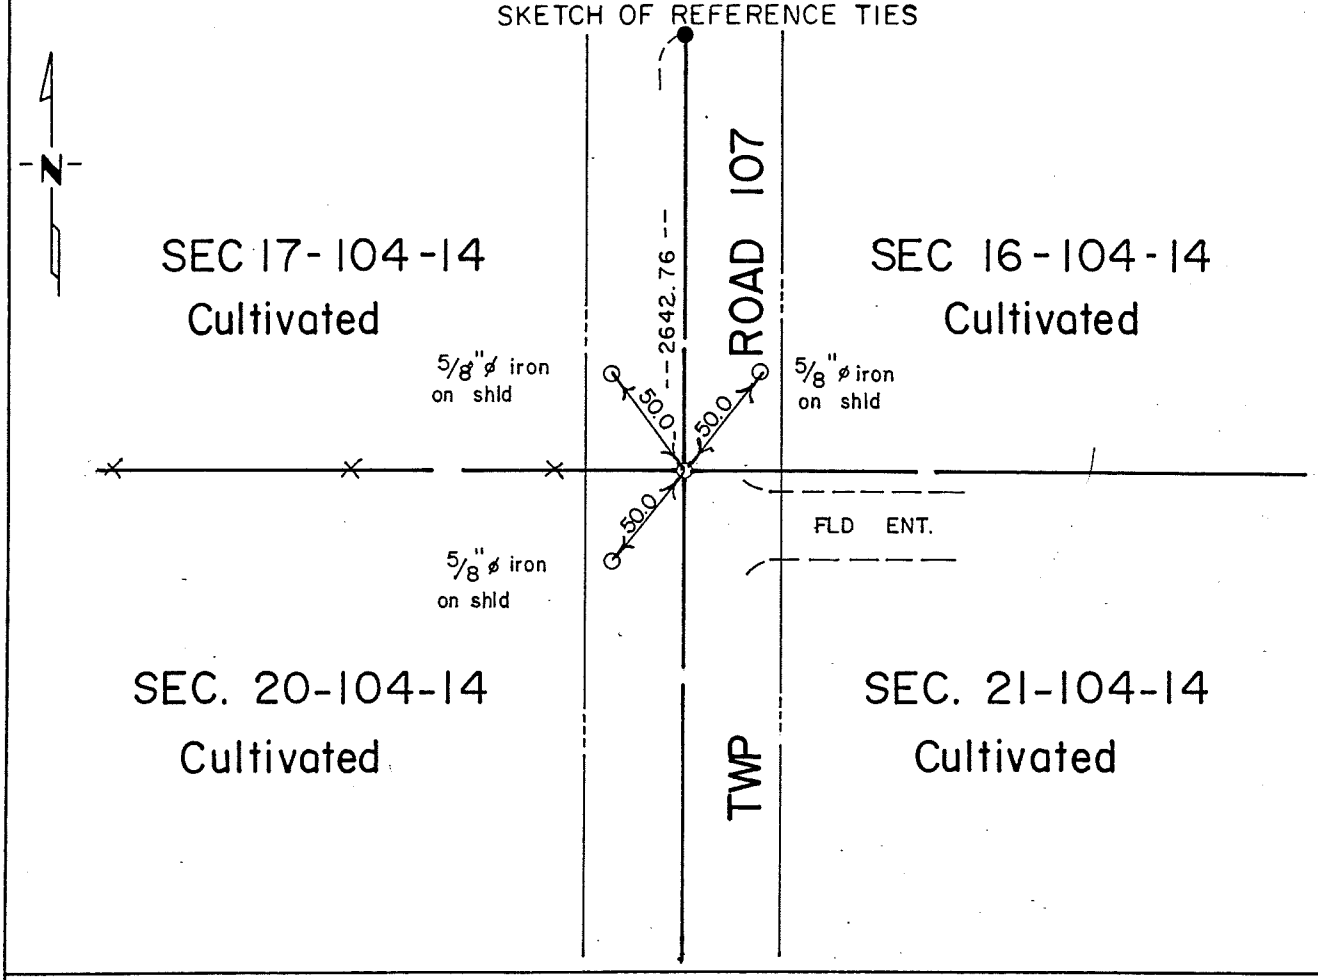

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

[signature] 11-14-91
SIGNATURE DATE

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☑ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER

County of _____

I hereby certify that this document was filed in the County Rec. office at _____ .M. on the _____ day of _____ A.D., 19__

COUNTY RECORDER _____

By _____, Deputy

DOCUMENT NO. _____

M.H.D. FORM NO. 2105

STATEMENT OF EVIDENCE

SE corner Section 17-104-14

This corner was originally established by Deputy Surveyor John Taylor of the U.S. General Land Office in 1853. The government notes show a wood post was set with a mound of earth and trench.

The following were contacted for section corner information:
Mower County Highway Dept
Mower County Recorder's Office
Zenk Engineering
Tucker Land Surveying

No information was obtained to support evidence of a perpetuation of the original public land survey corner.

1991 Jones, Haugh & Smith Inc crew dug with the County backhoe on centerline north-south road in line with fence west and uncovered a 1/2" diameter x 30" long pipe one foot below road surface wrapped with orange flagging. Continued digging and found no further evidence of public land survey corner or a perpetuation of accepted 1/2" diameter pipe as best evidence and placed a cast iron monument at same location.

The monument fits occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

E 1/4 Corner of Section 17, Township 104N, Range 14W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch:

☒ On 10-21-91 (DATE) found a 1/2" ø x 30" pipe capped RLS 9395

☒ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☒ On 10-21-91 (DATE) placed a Cast iron monument over pipe

SKETCH OF REFERENCE TIES

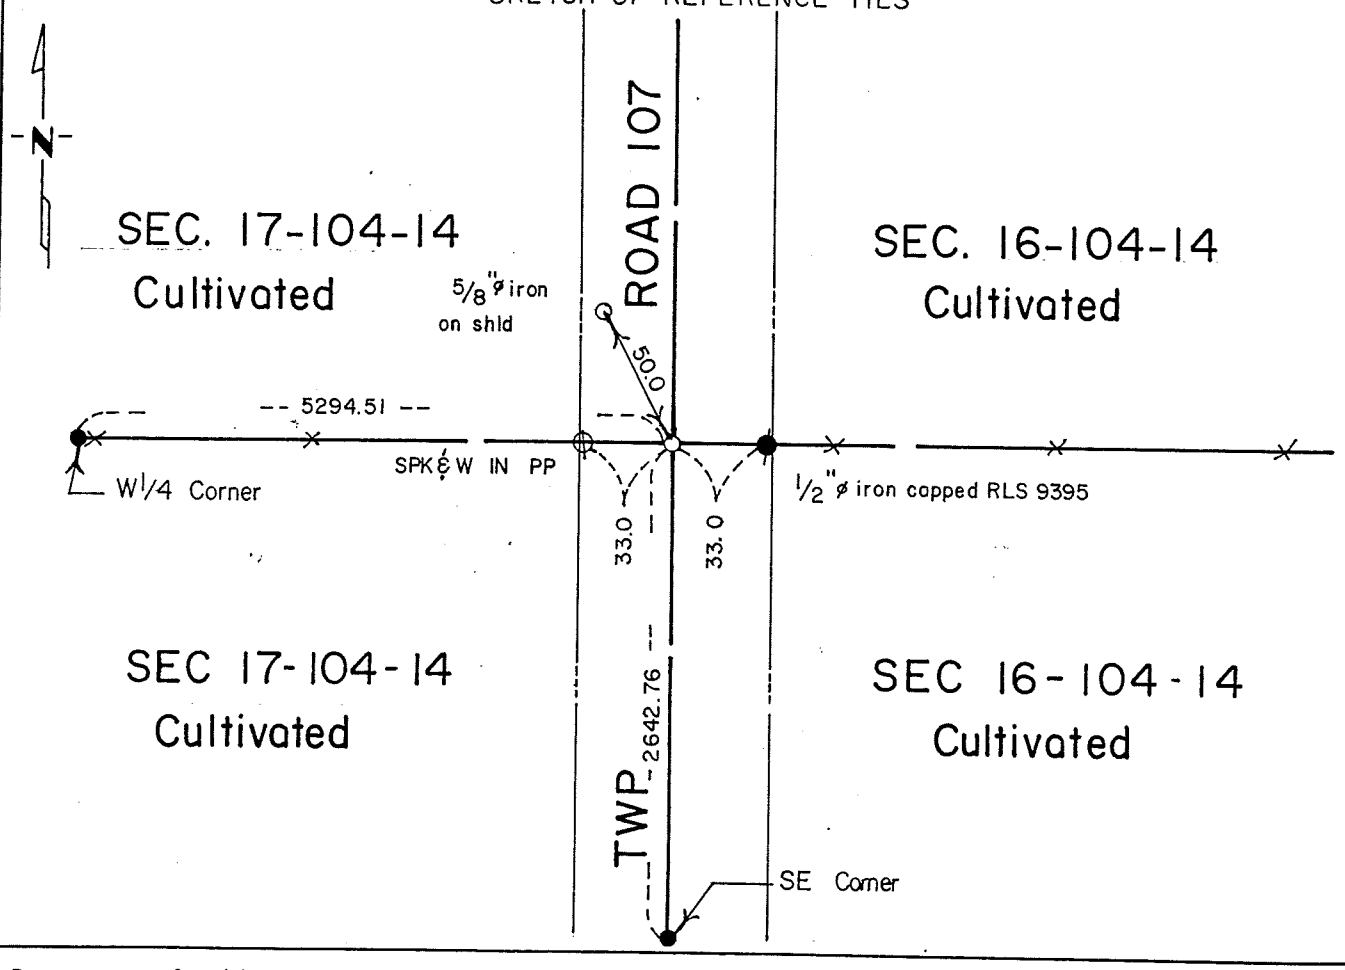

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

SIGNATURE _____ DATE 11-14-91

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☑ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER

County of _____

I hereby certify that this document was filed in the County Rec. office at _____ .M. on the _____ day of _____ A.D., 19__

COUNTY RECORDER _____

By _____, Deputy

DOCUMENT NO. _____

M.H.D. FORM NO. 2105

STATEMENT OF EVIDENCE

E 1/4 corner Section 17-104-14

This corner was originally established by Deputy Surveyor John Taylor of the U.S. General Land Office in 1853. The government notes show a wood post was set with a mound of earth and trench.

The following were contacted for section corner information:
Mower County Highway Dept
Mower County Recorder's Office
Zenk Engineering
Tucker Land Surveying

No information was obtained to support evidence of a perpetuation of the original public land survey corner.

1991 Jones, Haugh & Smith Inc crew dug with the County backhoe on centerline north-south road in line with fences east-west and uncovered a 1/2" diameter x 30" long iron shaft capped RLS 9395 one foot below road surface. Continued digging and found no further evidence of public land survey corner or any other perpetuation of reset 1/2" diameter pipe as located and accepted pipe as best evidence and placed a cast iron monument over pipe 0.5 feet below road grade.

The monument fits occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

N 1/4 Corner of Section 18, Township 104N, Range 14W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch:

☒ On 10-17-91 (DATE) found a 5/8" ø iron over a 6" dia. concrete monument

☒ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☒ On 10-17-91 (DATE) placed a Cast iron monument over concrete monument

SKETCH OF REFERENCE TIES

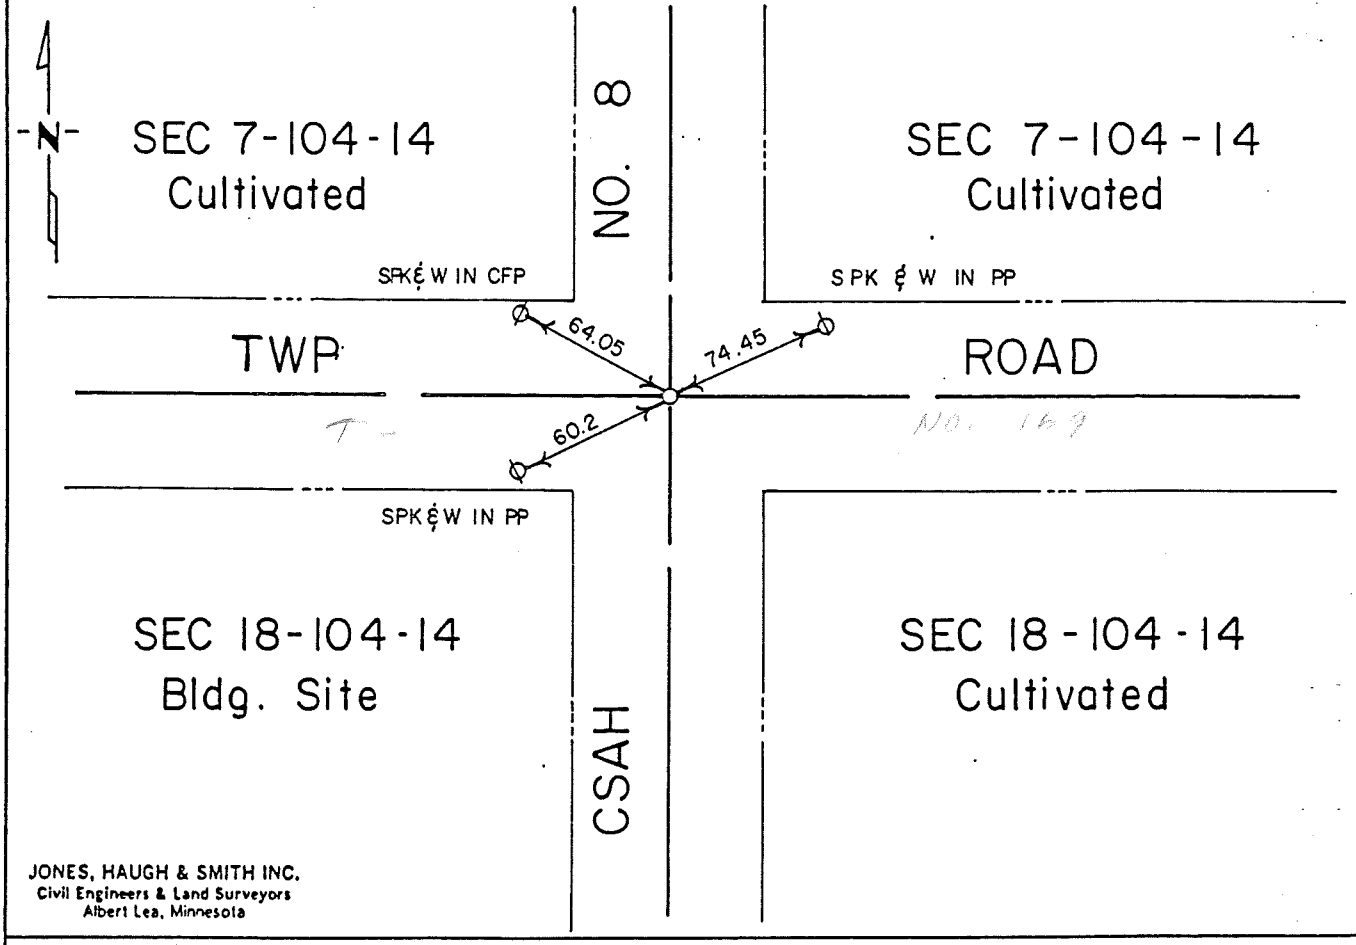

JONES, HAUGH & SMITH INC.
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

SIGNATURE _____ DATE 12-9-91

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☒ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER

County of _____

I hereby certify that this document was filed in the County Rec. office at _____ .M. on the ____ day of _____ A.D., 19__

COUNTY RECORDER _____

By _____, Deputy

DOCUMENT NO. _____

M.H.D. FORM NO. 2105

STATEMENT OF EVIDENCE

N 1/4 corner Section 18-104-14

This corner was originally established by Deputy Surveyor John Taylor of the U.S. General Land Office in 1854. The government notes show a wood post was set with a mound of earth and trench.

The following were contacted for section corner information:
Mower County Recorder's Office
Mower County Highway Department
Zenk Engineering
Tucker Land Surveying

1930 Mower County Grading Plans show a tile monument inplace and the following ties were taken:
74.9' NE to PP
51.7' SE to TP
56.9' SW to PP
67.7' WNW to first steel fence post

1965 Book 'A' in the Office of the Mower County Engineer shows a concrete monument inplace and the following ties were taken:
74.9' NE to PP
59.5' SW to PP
60.1' SE to TP

1991 Jones, Haugh & Smith Inc crew under the direction of John Schulte, County Surveyor, dug with the County backhoe on centerline centerline of north-south-east-west roads and uncovered a 5/8" diameter iron one foot below road surface. Continued digging and found a 1/2" diameter iron cast in the center of a 6" diameter concrete monument three feet below road surface in natural soil. Left concrete monument as found and set cast iron monument over on road surface.

The monument found fits occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

For electronic survey data & analysis contact the firm of Jones, Haugh & Smith Inc.

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

N 1/4 Corner of Section 19, Township 104N, Range 14W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch:

☒ On 10-17-91 (DATE) found a 3/4" ø pipe over a deteriated 5" dia. concrete monument cast in clay tile

☒ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 10-17-91 (DATE) placed a Cast iron monument over concrete monument

SKETCH OF REFERENCE TIES

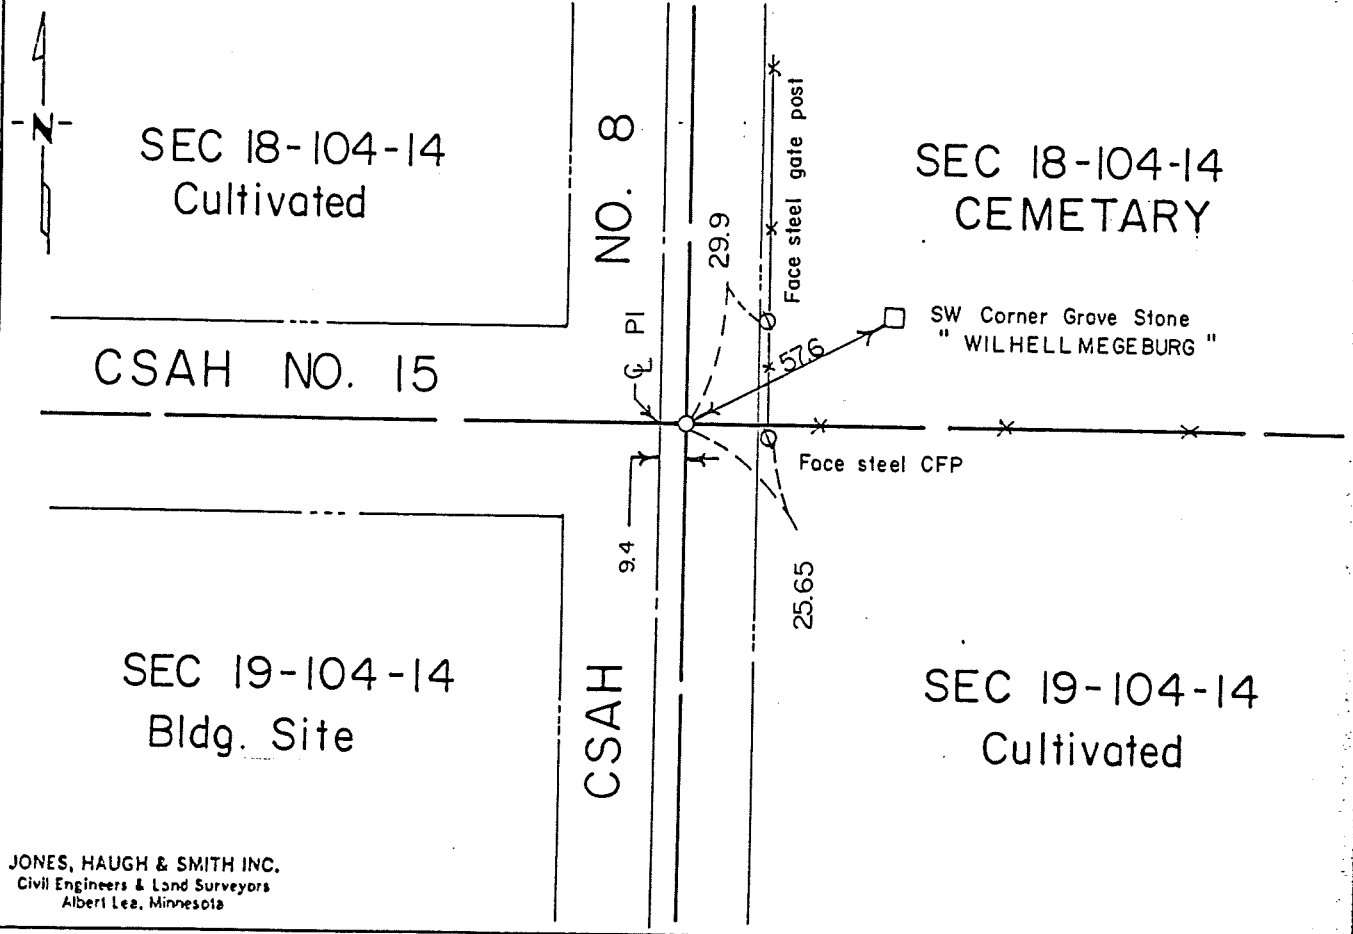

JONES, HAUGH & SMITH INC.
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

SIGNATURE _____ DATE 12-9-91

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☑ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of _____

I hereby certify that this document was filed in the County Rec. office at _____ .M. on the _____ day of _____ A.D., 19___

COUNTY RECORDER _____

By _____, Deputy

DOCUMENT NO. _____

M.H.D. FORM NO. 2105

STATEMENT OF EVIDENCE

N 1/4 corner Section 19-104-14

This corner was originally established by Deputy Surveyor John Taylor of the U.S. General Land Office in 1854. The government notes show a wood post was set with a mound of earth and trench.

The following were contacted for section corner information:
Mower County Recorder's Office
Mower County Highway Department
Zenk Engineering
Tucker Land Surveying

1930 Mower County Grading Plans show a concrete monument inplace 9.4 feet east of centerline PI at Sta 106+04.8 and the following ties were taken:
24.6' E to cemetery gate post
65.3' NE to tombstone of 'Laabs'
69.0' NE to tombstone of 'Buchloz'

1930 Book 'A' in the Office of the Mower County Engineer shows a concrete monument inplace and the following ties were taken:
69.5' SW to Willow Tree
44.0' NW to CFP
68.0' NE to Balsam tree in cemetery
56.5' NE to tombstone of 'Wilhelmine'
65.3' NE to tombstone of 'Laabs'
69.0' NE to tombstone of 'Bucholz'

1965 Book 'A' in the Office of the Mower County Engineer shows a concrete monument inplace 9.4' east of centerline PI and the following ties were taken:
24.6' E to cemetery gate post
65.3' NE to tombstone of 'Laabs'
69.0' NE to tombstone of 'Buchloz'

1991 Jones, Haugh & Smith Inc crew under the direction of John Schulte, County Surveyor, dug with the County backhoe at a point 9.4 feet east of the centerline of CSAH #8 in line with fence east and uncovered a 3/4" diameter pipe one foot below road surface. Continued digging and found a 5" diameter deteriorated concrete monument cast in the center of a clay tile. Monument agrees with past records and was left as found. A cast iron monument was placed over concrete monument on road surface.

The monument found fits occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

For electronic survey data & analysis contact the firm of Jones, Haugh & Smith Inc.

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

NE Corner of Section 19, Township 104N Range 14W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch

☐ On 07/17/1997 (DATE) found a 3/4"X11" IRON, ROCK, REMAINS OF WOOD STAKE

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 07/17/1997 (DATE) placed a CAST IRON MONUMENT

SKETCH OF REFERENCE TIES

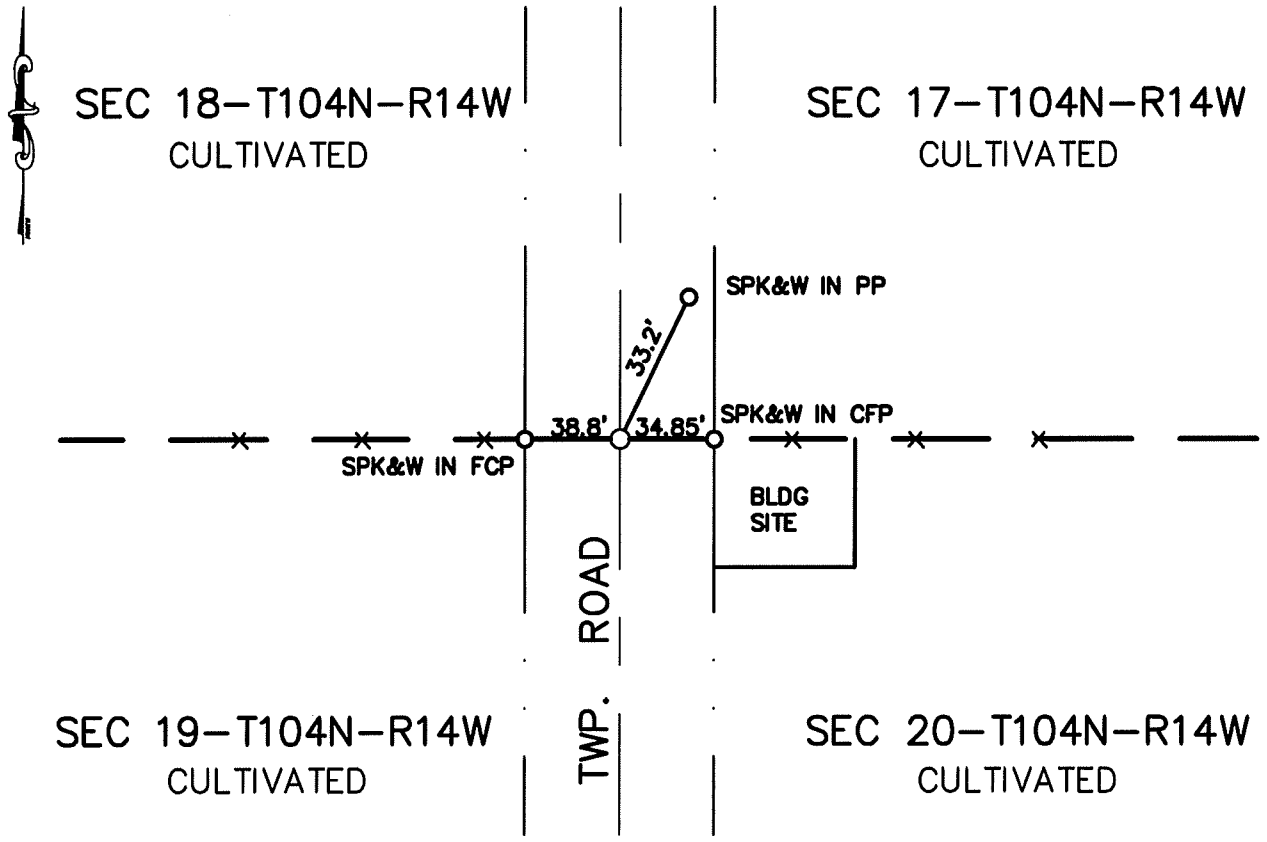

JONES, HAUGH & SMITH INC
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein were prepared by me or under my direct supervision.

_____ (SIGNATURE) 10-5-00 (DATE)

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☒ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of _____

I hereby certify that this document was filed in the County Rec. office at _____ .M. on the _____ day of _____ A.D., 19___

COUNTY RECORDER _____

By _____ , Deputy

DOCUMENT NO. _____

M.H.D. FORM NO. 2105

NE Cor SEC 19-102-14

This corner was originally established by Deputy Surveyor John Taylor of the U.S. General Land Office in 1853. The government notes show a wood post was set with mound of earth and trench.

The following were contacted for section corner information.

Mower County Highway Dept.
Mower County Recorder
Tucker Land Surveying

No record of this corner was obtained from the above mentioned offices.

1997 Jones Haugh and Smith crew, under direction of John Schulte, Mower County Surveyor RLS 13807, dug with the county backhoe at the centerline of township road N-S and in line with line fence west. Dug at location of 3/4" iron found. Uncovered large rock 3.5' below surface with remains of wood stake on north side. Placed a 5/8" iron capped 13807 on the north side of rock found. 3/4" iron was 0.10' south and 0.70' east of true corner. Placed a cast iron monument over rock 0.40' below road surface.

The monument fits occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

For electronic survey data and analysis, contact the firm of Jones, Haugh and Smith Inc.

Index No. N-7

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

NORTH QUARTER Corner of Section 20, Township 104, Range 14, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch:

☐ On _____ (DATE) found a _____

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

■ On 7/22/97 (DATE) Placed a 3/4" X 24" REBAR WITH AN ALUMINUM CAP, STAMPED "DNR SURVEY MARKER" UP 0.2'

SKETCH OF REFERENCE TIES

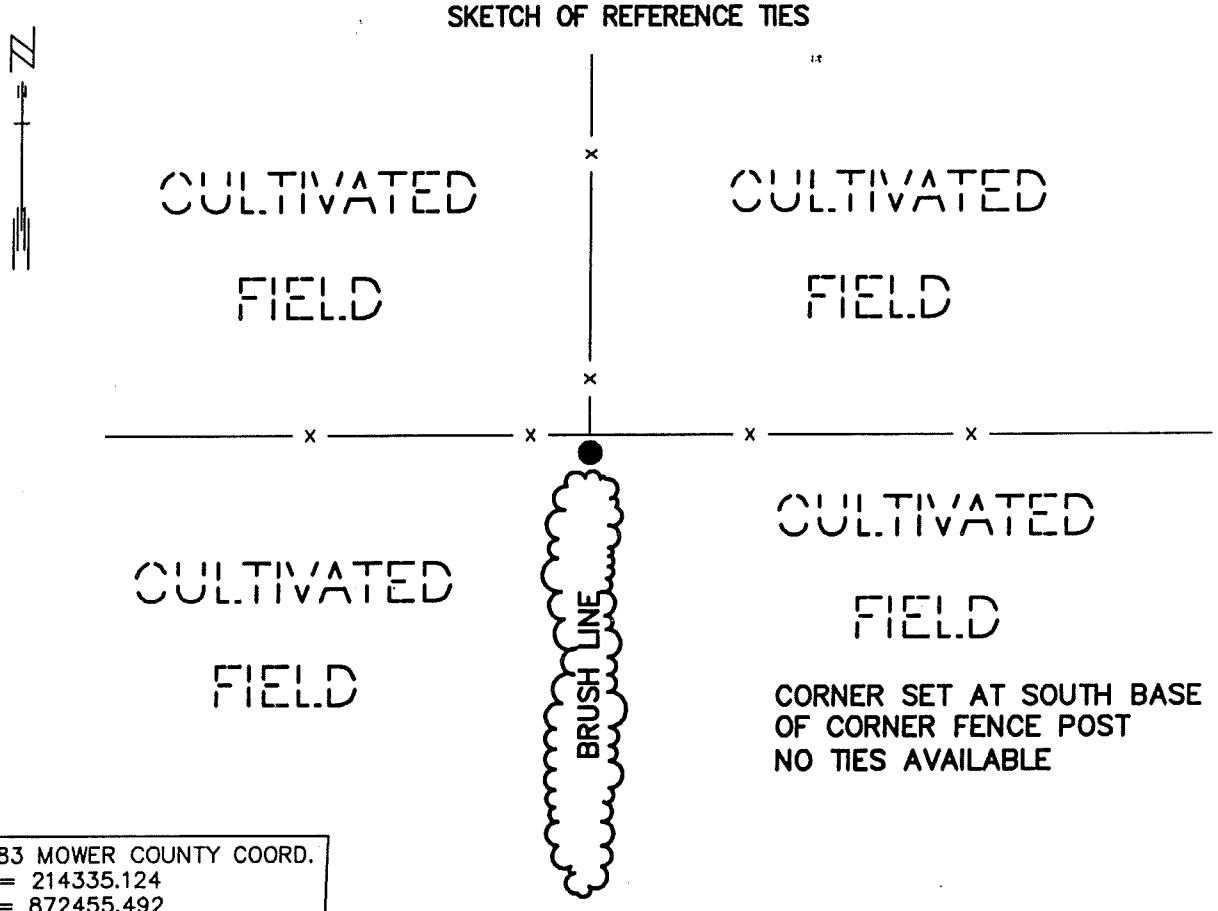

1983 MOWER COUNTY COORD.
N = 214335.124
E = 872455.492

Statement of evidence relative to this corner location is on back of page.

Oct 6, 1997
WMA01465

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

Bruce W. Hoppe (SIGNATURE) 10/24/97 (DATE)

License Number 17003

■ Land Surveyor, ☐ Professional Engineer

☐ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER

County of _____

I hereby certify that this document was filed in the Co. recorders office at _____ .M. on the ____ day of _____ A.D., 19____

County Recorder _____

By _____, Deputy

DOCUMENT NO. _____

North Quarter Corner of Section 20, Township 104 North, Range 14 West

The DNR Bureau of Engineering contacted the following for survey information:
Minnesota Secretary of State's Office
Jones, Haugh and Smith Inc. of Albert Lea (John H. Schulte IV, part time County Surveyor)

1853 U. S. General Land Office notes obtained from the Secretary of State's Office show the corner marked with a wood post and deposited charcoal in a mound of earth and sod with a cut trench. Also, planted osage orange seeds north and south between pits and trench.

No resurvey information was obtained for this corner.

1997 July 22, DNR Bureau of Engineering traversed to the area of corner and found an old wood corner fence post with fences east, west and north and a brush line south. Probed and dug a 6 foot diameter area around the corner fence corner and scanned the area with an electronic metal detector in search of a monument but did not find one. Set a 3/4 inch diameter by 24 inch long re-bar with aluminum cap marked "DNR SURVEY MARKER" at the south base of corner fence post and found it to be:
2643.95 feet from the northeast corner of Section 19
5297.81 feet from the north quarter of Section 17

Analysis of the above information led the DNR Bureau of Engineering to conclude that the corner fence post with fences east, west and north marks the obliterated position of the corner. Set a DNR Survey Marker next to the corner fence post.

BOOK 25 PAGE 136 "N" TIE BOOK P. 90

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER


N 1/4 Corner to Section 22 Township 104N Range 14W No. 4


STATE OF MINNESOTA,

County of Mower S.S.

I hereby certify that on the 21st day of November, 1966, that I, Leonard Sankstone, a Registered Land Surveyor, found the North quarter corner of Section 22, T104N, R14W, which was evidenced by a wooden stake 24" below surface, 1.0' NW of a huge stone, and I further certify that to perpetuate the location of such corner I did, at the exact location thereof, place a permanent marker consisting of 1"x12" iron rod & a 3/8"x24" iron rod, projects 4". I further certify that I established 2 references or witness monuments consisting of fence lines which reference or witness monuments are located in the manner following.

South 0.20 ft. E-W Fenceline
East 49.0 ft. Fenceline Northerly

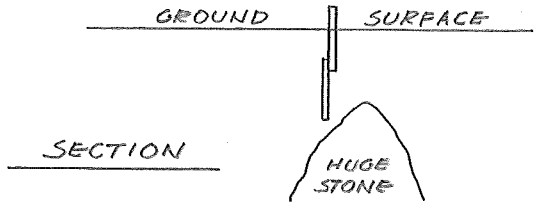

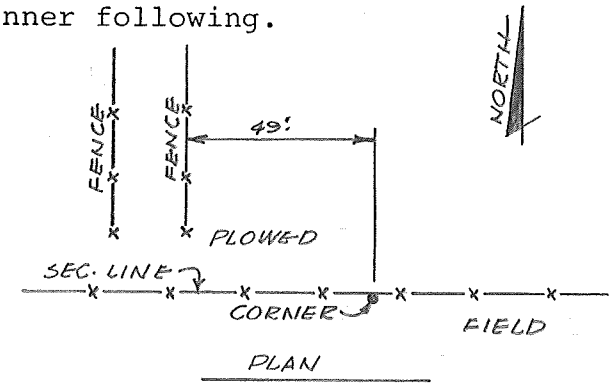

Dated at Rochester, Minnesota, this 1st day of December, 1966.

Distance to NW cor. Sec. 22 =2645.65'
Distance to NE cor. Sec. 22 =2645.65'

Leonard Sankstone

Leonard Sankstone

Registered Land Surveyor No. 5325

OFFICE OF THE REGISTER OF DEEDS

County of _____

I hereby certify that the within instrument was filed in this office for record on the _____ day of _____ A.D., 19____.

280007

Office of Register of Deeds } ss.
Mower County, Minnesota }
I hereby certify that the within instrument was filed for record on the 8 day of Dec D. 1966 at 11 o'clock a M. and duly recorded in Book 25 of Mis on page 136.
Pearl M Eggen Register of Deeds
BY Mary Eggen, Deputy

_____
Register of Deeds

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

W 1/4 Corner of Section 22, Township 104N Range 14W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch

☐ On 07/122004 (DATE) found a –

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 07/12/2004 (DATE) placed a 5/8"X16" REBAR WITH CAST IRON MONUMENT

SKETCH OF REFERENCE TIES

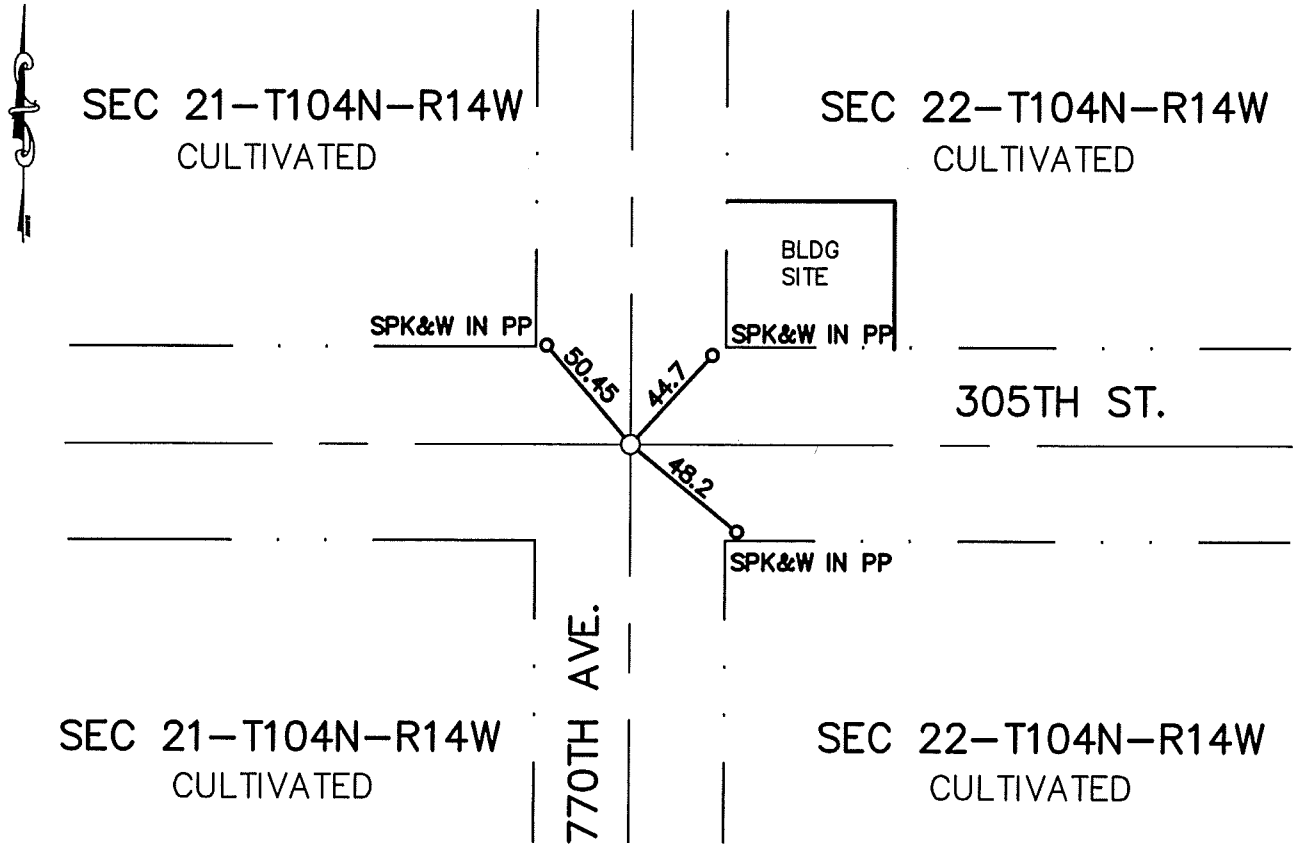

JONES, HAUGH & SMITH INC
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein were prepared by me or under my direct supervision.

SIGNATURE _____ DATE 8-30-04

Registration No. 13807

☒ Land Surveyor, ☐ Professional Engineer

☒ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of _____

I hereby certify that this document was filed in the County Rec. office at _____ .M. on the _____ day of _____ A.D., 20___

COUNTY RECORDER _____

By _____, Deputy

DOCUMENT NO. _____

M.H.D. FORM NO. 2105

W 1/4 Corner Section 22-T104N-R14W

Deputy Surveyor John Taylor of the U.S. General Land Office originally established this corner in 1853 . The government notes show a wood post was set with mound of earth and trench.

The following were contacted for section corner information.

Mower County Highway Department
Mower County Recorder
Tucker Land Surveying

2004 Jones Haugh and Smith crew, under direction of John Schulte, Mower County Surveyor RLS 13807, dug Boe Brothers backhoe at the centerline centerline of 305th Street, east-west, and 770th Avenue, north-south. Uncovered a concrete monument with a 3/4" iron in the center and a 2" hub on the east side. Placed a 5/8"x16" rebar with a cast iron monument above found monument 0.6' +/- below road surface.

The monument is in agreement with the record and is accepted as best evidence of a perpetuation of the original public land survey corner.

For electronic survey data and analysis, contact the firm of Jones, Haugh and Smith Inc.

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

E 1/4 Corner of Section 22, Township 104N Range 14W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch

☐ On – (DATE) found a –

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 07/15/2004 (DATE) placed a 5/8"X16" REBAR WITH CAST IRON MONUMENT

SKETCH OF REFERENCE TIES

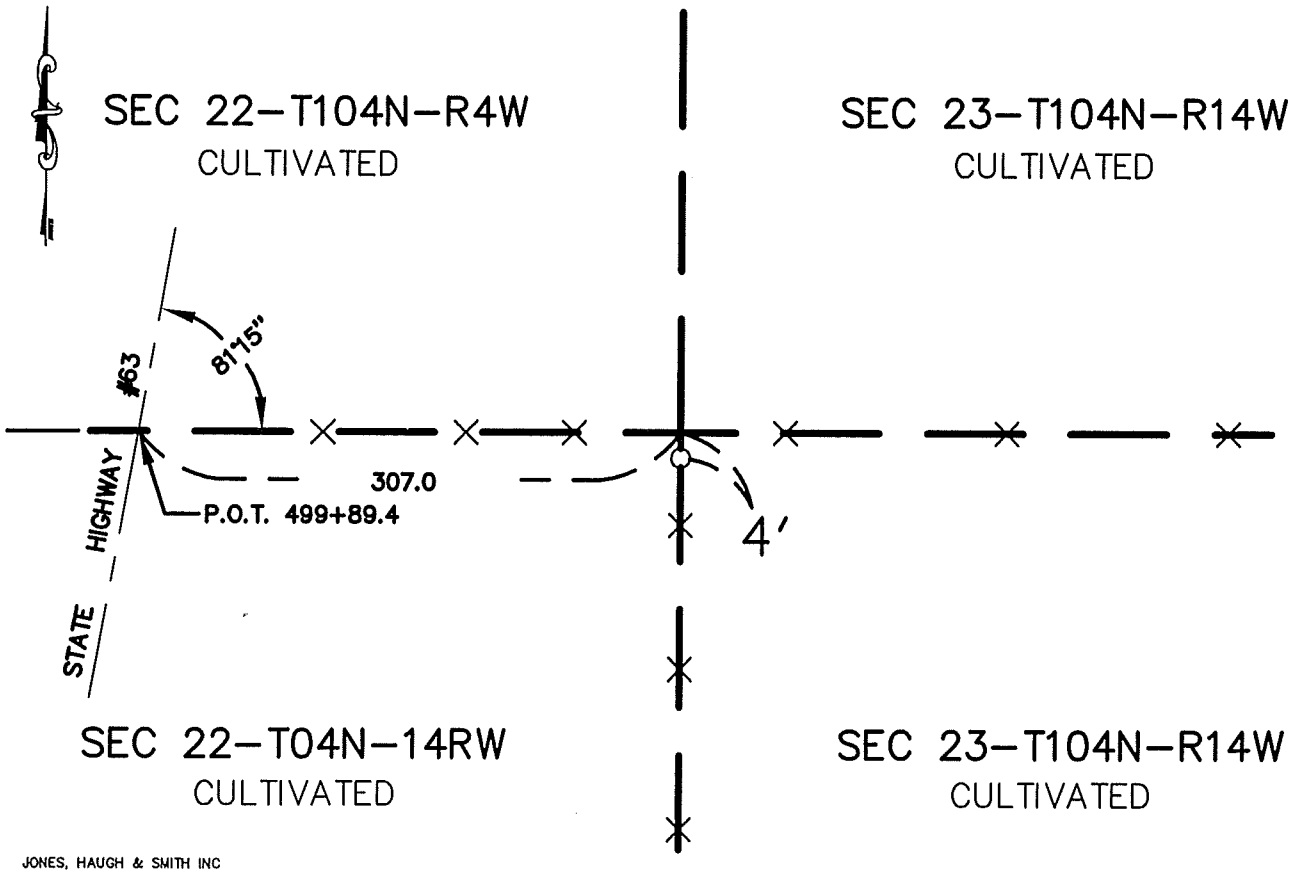

JONES, HAUGH & SMITH INC
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein were prepared by me or under my direct supervision.

_____ 9-30-04
SIGNATURE DATE

Registration No. 13807

☒ Land Surveyor, ☐ Professional Engineer

☒ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of _____

I hereby certify that this document was filed in the County Rec. office at _____ .M. on the _____ day of _____ A.D., 20___

COUNTY RECORDER _____

By _____, Deputy

DOCUMENT NO. _____

M.H.D. FORM NO. 2105

E 1/4 Corner Section 22-T104N-R14W

Deputy Surveyor John Taylor of the U.S. General Land Office originally established this corner in 1853 . The government notes show a wood post was set with mound of earth and trench.

The following were contacted for section corner information.

Mower County Highway Department
Mower County Recorder
Tucker Land Surveying

2004 Jones Haugh and Smith crew, under direction of John Schulte, Mower County Surveyor RLS 13807, used information shown on Trunk Highway #63 R/W map to place a 5/8"x16" rebar with cast iron monument at ground surface. Highway map shows the corner is located 307.0' east of P.O.T. station 4999+89.4 at an angle of 81°15' turned from north to east from the centerline of Trunk Highway #63.

The monument set is in agreement with the record and is accepted as best evidence of a perpetuation of the original public land survey corner.

For electronic survey data and analysis, contact the firm of Jones, Haugh and Smith Inc.

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

SE Corner of Section 22, Township 104N Range 14W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch

☐ On – (DATE) found a –

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 07/12/2004 (DATE) placed a 5/8"X16" REBAR WITH CAST IRON MONUMENT

SKETCH OF REFERENCE TIES

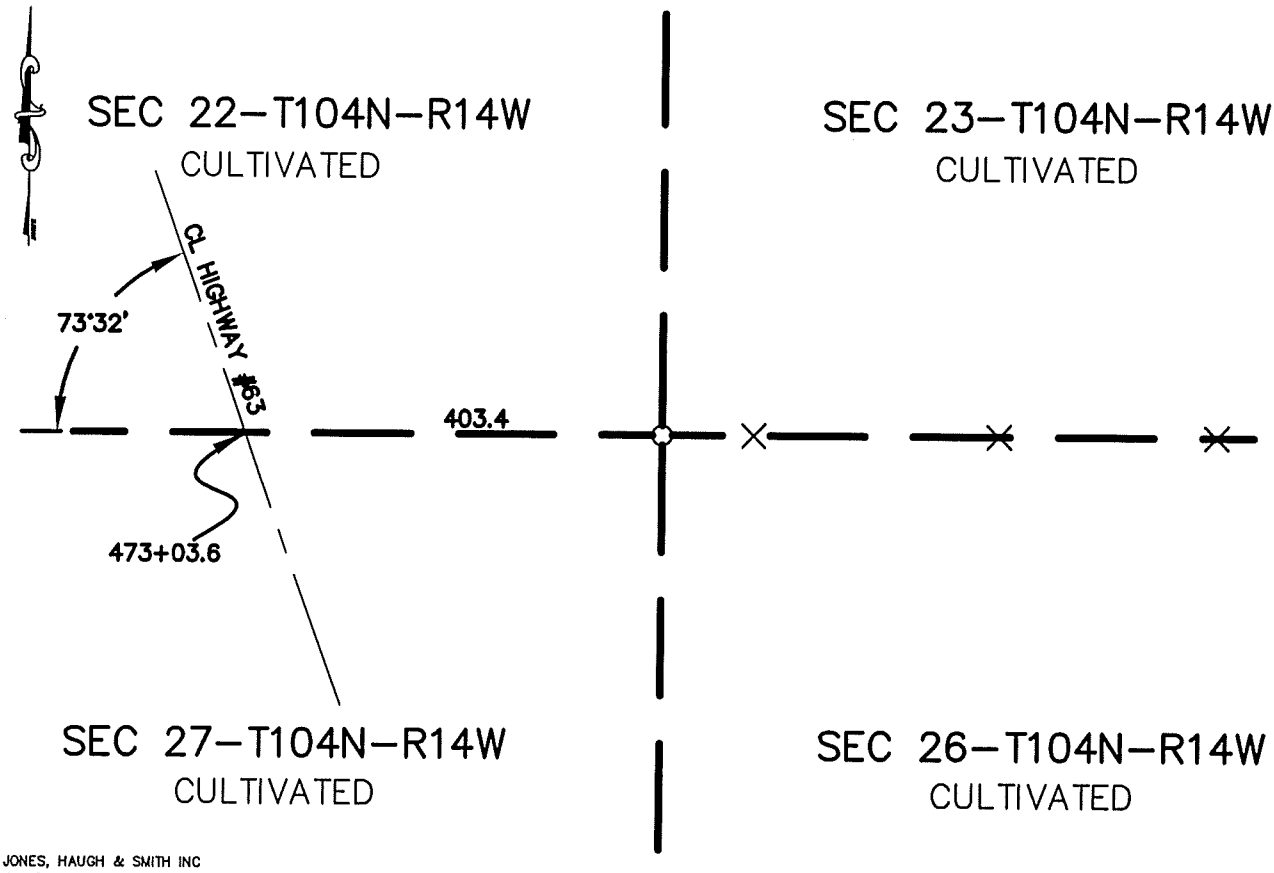

JONES, HAUGH & SMITH INC
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein were prepared by me or under my direct supervision.

SIGNATURE _____ DATE 9-30-04

Registration No. 13807

☒ Land Surveyor, ☐ Professional Engineer

☒ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of _____

I hereby certify that this document was filed in the County Rec. office at _____ .M. on the _____ day of _____ A.D., 20___

COUNTY RECORDER _____

By _____, Deputy

DOCUMENT NO. _____

M.H.D. FORM NO. 2105

SE Corner Section 22-T104N-R14W

Deputy Surveyor John Taylor of the U.S. General Land Office originally established this corner in 1853 . The government notes show a wood post was set with mound of earth and trench.

The following were contacted for section corner information.

Mower County Highway Department
Mower County Recorder
Tucker Land Surveying

2004 Jones Haugh and Smith crew, under direction of John Schulte, Mower County Surveyor RLS 13807, used information from Trunk Highway # 63 MN Highway map to place a 5/8"x16" rebar with cast iron monument 1.5' below ground surface. Highway map shows that corner is located 403.4' east of P.O.T. station 473+03.6 and at an angle of 73°32' turned from south to east from centerline of said Trunk Highway #63.

The monument is in agreement with the record and is accepted as best evidence of a perpetuation of the original public land survey corner.

For electronic survey data and analysis, contact the firm of Jones, Haugh and Smith Inc.

BOOK 25 PAGE 137 "I" TIE BOOK P. 90

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER


NW Corner to Section 22 Township 104N Range 14W No. 5

STATE OF MINNESOTA,


County of Mower S.S.

I hereby certify that on the 21st day of November, 19 66, that I, Leonard Sankstone, a Registered Land Surveyor, found the Northwest corner of Section 22, T104N, R14W, which was evidenced by 18" dia x 12" flat head stone monument, 48" below grade, and I further certify that to perpetuate the location of such corner I did, at the exact location thereof, place a permanent marker consisting of 3/8"x24" iron rod in a 2"x24" iron pipe, 4" below grade. I further certify that I established 4 references or witness monuments consisting of 2 fence posts, 1 tele. pole, 1 power pole, which reference or witness monuments are located in the manner following.

W 48.46 ft. Cor. Fence Post (N&B cap)
N137.69 ft. Power Pole (N&B cap)
E 37.03 ft. Cor. Fence Post (N&B cap)
SE 25.50 ft. Telephone Pole (N&B cap)

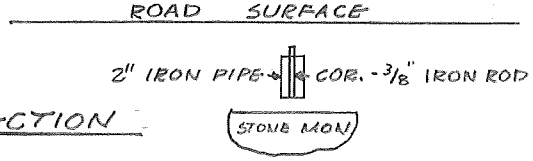

SECTION

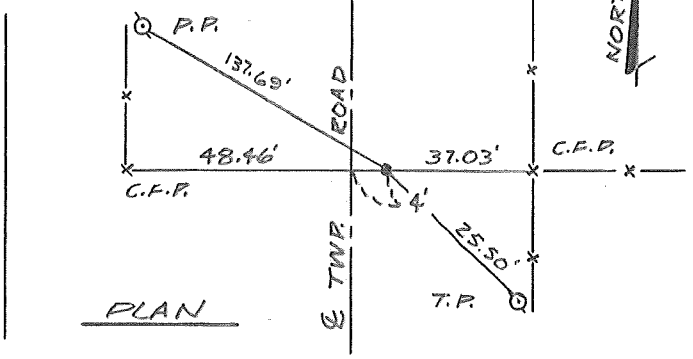

PLAN

Dated at Rochester, Minnesota, this 1st day of December, 19 66.

Distance to N1/4 Sec. 22 = 2645.65'

Leonard Sankstone

Registered Land Surveyor No. 5325

OFFICE OF THE REGISTER OF DEEDS

County of _____

I hereby certify that the within instrument was filed in this office for record on the _____ day of _____ A.D., 19____.

Office of Register of Deeds
Mower County, Minnesota
280008
I hereby certify that the within instrument was filed in this office for record on the 8 day of Dec 19 66
at 11 o'clock A.M. and was duly recorded in Book 137 Page 71 Misc
Register of Deeds
By Deputy

Register of Deeds

BOOK 25 PAGE 137

68

BOOK 25 PAGE 138 "O" TIE BOOK P. 90

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER


NE Corner to Section 22 Township 104N Range 14W No. 6

STATE OF MINNESOTA,

County of Mower S.S.

I hereby certify that on the 21st day of November, 1966, that I, Leonard Sankstone, a Registered Land Surveyor, found the Northeast corner of Section 22, T104N, R14W, which was evidenced by a prior survey, landowner testimony and parole evidence, and I further certify that to perpetuate the location of such corner I did, at the exact location thereof, place a permanent marker consisting of 3"x20" ferro magnetic cast iron monument, flush with ground. I further certify that I established 3 references or witness monuments consisting of 2 fence lines & 1 rail-road, which reference or witness monuments are located in the manner following.

W 50.63 ft. Railroad center
W 1.0 ft. N-S Fence line
S 2.0 ft. E Fence line
(Prolong E. fence line W. on projection fence line E.)

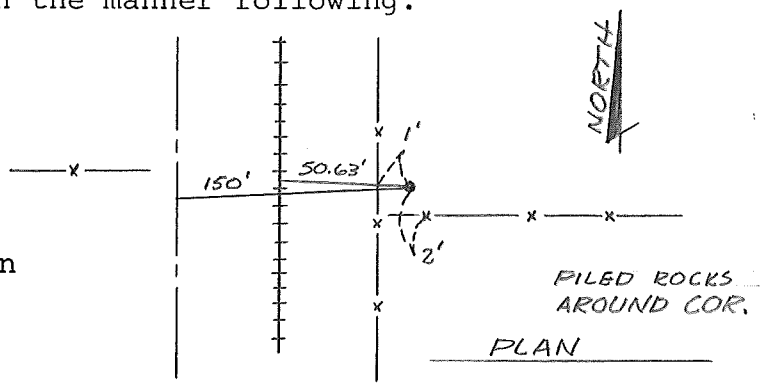

Dated at Rochester, Minnesota, this 1st day of December, 1966.

Leonard Sankstone

Leonard Sankstone

Registered Land Surveyor No. 5325

OFFICE OF THE REGISTER OF DEEDS

County of _____

I hereby certify that the within instrument was filed in this office for record on the _____ day of _____ A.D., 19____.

280009

Office of Register of Deeds } ss.
Mower County, Minnesota }
I hereby certify that the within instrument was filed for record on the 8th day of Dec A.D. 1966 at 11 o'clock A.M. and duly recorded in Book 25 of Misc on page 138
Gerald M Egli Register of Deeds
Mary Egli Deputy

_____
Register of Deeds

_____

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

N 1/4 Corner of Section 26, Township 104N Range 14W, 5th P.M.

STATE OF MINNESOTA, County of MOWER

At the corner location shown on the sketch


☐ On 09/06/2000 (DATE) found a 3' STEEL FENCE POST WITH WOOD REMAINS BELOW PLACED 5/8" IRON WITH C.I.M OVER FENCE POST, 0.4' BELOW ROAD SURFACE

☒ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On _____ (DATE) placed a _____

_____

SKETCH OF REFERENCE TIES

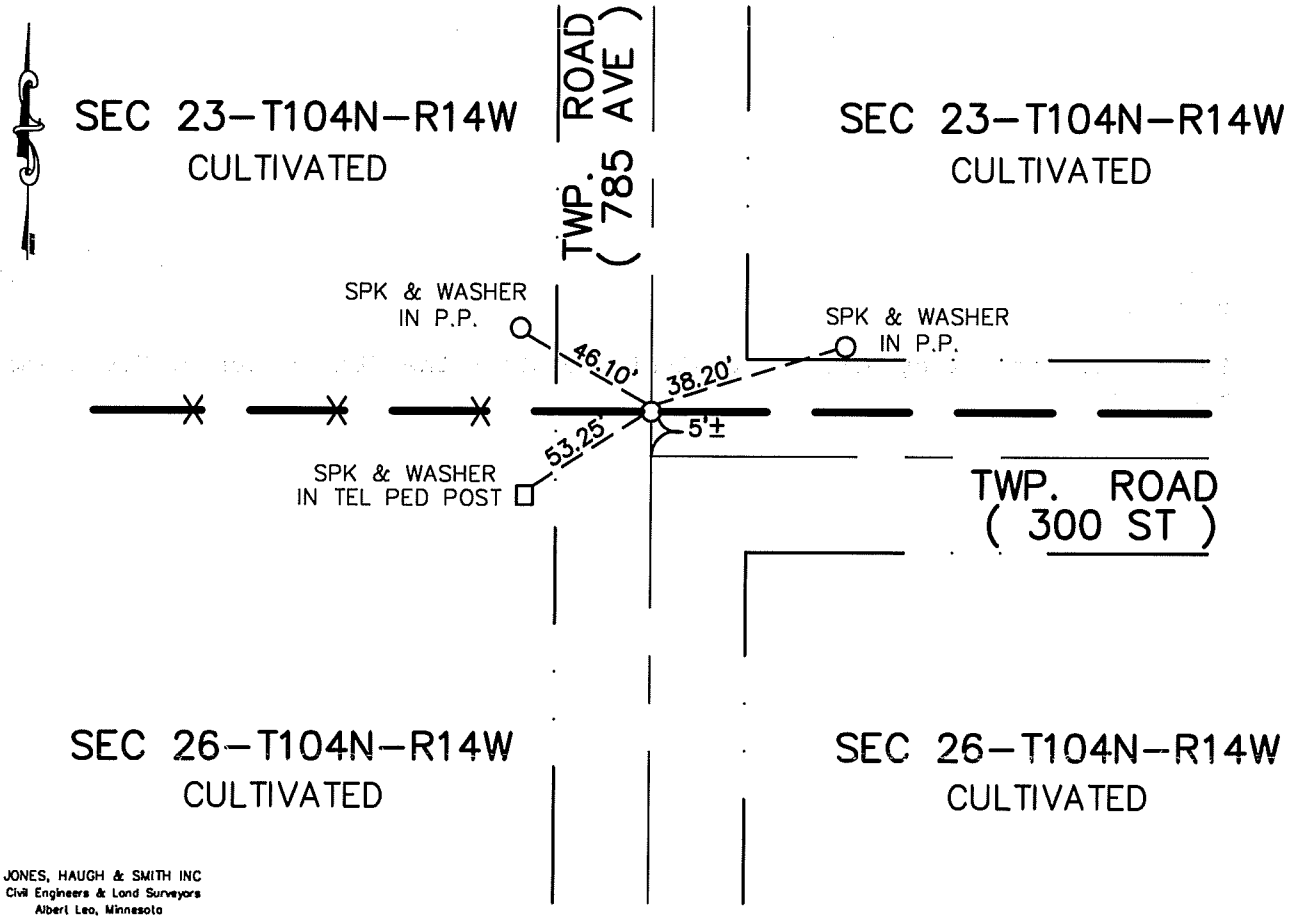

JONES, HAUGH & SMITH INC
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein were prepared by me or under my direct supervision.

_____ 9-21-00
SIGNATURE DATE

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☒ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of _____

I hereby certify that this document was filed in the County Rec. office at _____ .M. on the _____ day of _____ A.D., 19___

COUNTY RECORDER _____

By _____, Deputy

DOCUMENT NO. _____

M.H.D. FORM NO. 2105

N 1/4 Cor Sec 26-104-14

Deputy Surveyor John Taylor of the U.S. General Land Office originally established this corner in 1853. The government notes show a wood post was set with mound of earth and trench.

The following were contacted for section corner information.

Mower County Highway Dept.
Mower County Recorder
Tucker Land Surveying

No record of this corner was obtained from the above mentioned offices.

2000 Jones Haugh and Smith crew, under direction of John Schulte, Mower County Surveyor RLS 13807, dug with Mower County backhoe, at the location of signal from locator. Uncovered a 3'steel fence post with wood remains at bottom of post. Accepted fence post as true perpetuation of original corner. Placed a capped 5/8" iron on East side of post. Set a 5/8"x16" iron with C.I.M over fence post, 0.40' below road surface. Took new ties.

The monument fits occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

For electronic survey data and analysis, contact the firm of Jones, Haugh and Smith Inc.

Index No. P 90 "R" P 104 "X" 101 "I"

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

W1/4 Corner of Section 26, Township 104N Range 14W, 5TH P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch:

☐ On 10-27-92 (DATE) found a 3/4"ø CAPPED PIPE RLS #6980

☒ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 10-27-92 (DATE) placed a NOTHING

SKETCH OF REFERENCE TIES

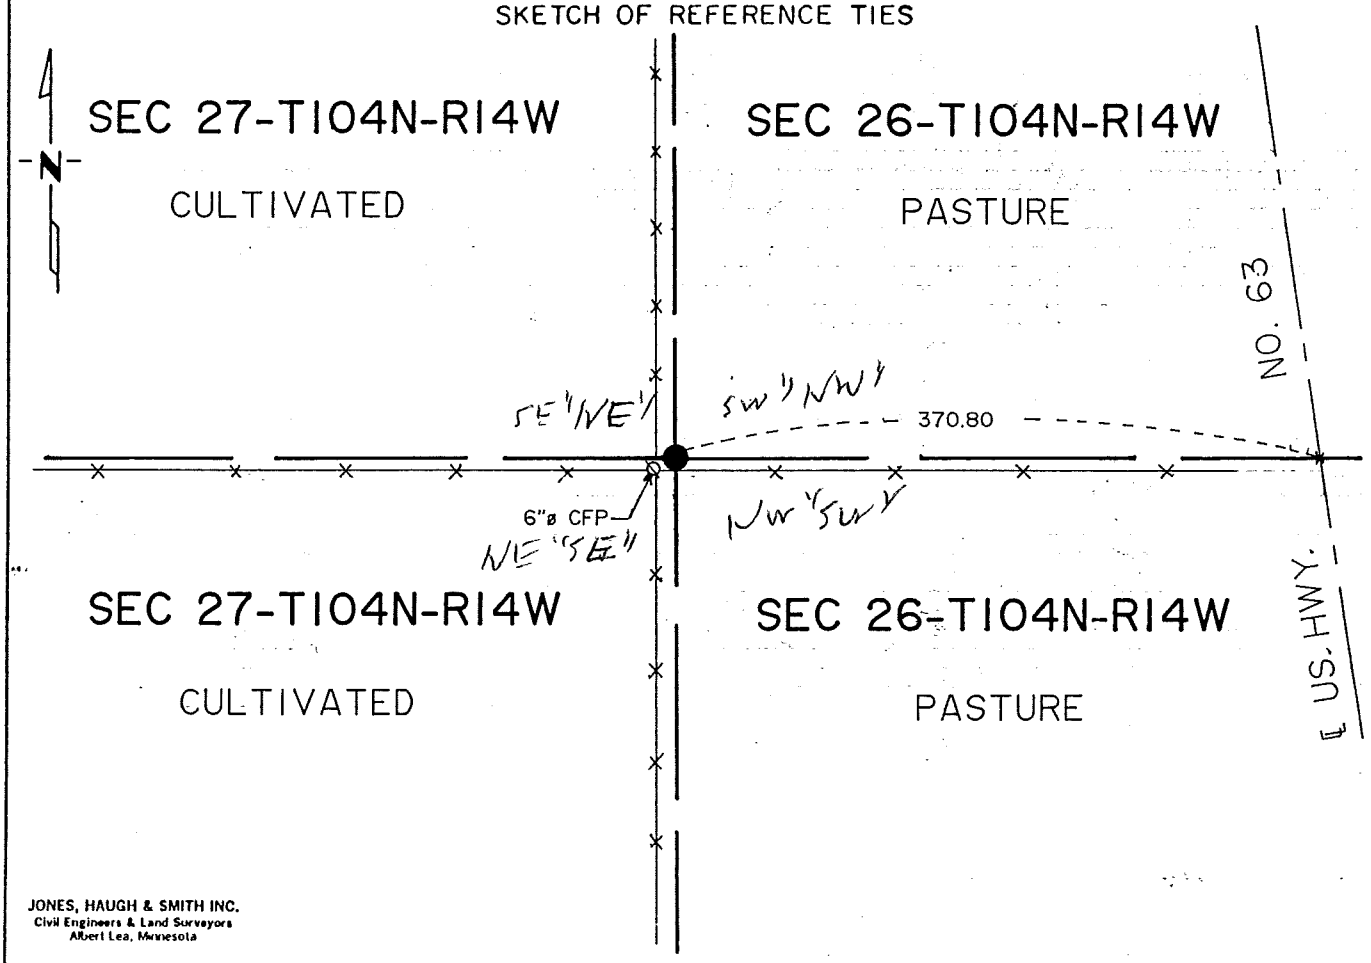

JONES, HAUGH & SMITH INC.
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

SIGNATURE 4-30-93 DATE

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☑ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of Mower

I hereby certify that this document was filed in the County Rec. office at 3 P.M. on the 4 day of May A.D., 1993

COUNTY RECORDER Chandra Engel

By Marlene Martin, Deputy

DOCUMENT NO. 420486

Bk 79 Mis Pg 338

M.H.D. FORM NO. 2105

BOOK 79 PAGE 338

STATEMENT OF EVIDENCE

W 1/4 corner Sec. 26-104-14

This corner was originally established by Deputy Surveyor John Taylor of the U.S. General Land Survey Office in 1853. The government notes show a wood post was set with a mound of earth and trench.

The following were contacted for section corner information:
Mower County Engineering Department
Mower County Recorder
Zenk Engineering
Tucker Land Surveying

The following information was obtained to support evidence of a perpetuation of the original public land survey corner.

1885 Clausen field notes indicate a government post at the E 1/4 corner of Section 27.

1959 Trunk Highway No. 63 right-of-way map shows monument inplace at fence intersection 384.0 feet west of centerline PI Sta 445+45.4 at an angle of 73°21' north-west from centerline tangent. No ties were taken.

1992 Jones, Haugh & Smith crew under the direction of John H. Schulte IV, uncovered a 3/4" diameter pipe capped RLS 6980 set by Douglas N. Betts, on the east side of a 6" diameter corner fence post at a 4-way fence intersection. A measurement was found of 383.77 feet west of centerline PI Sta 445 + 45.4 versus 384.0 as shown on the 1959 right-of-way map.

This monument fits occupation and road centerlines within the section and is accepted as best evidence of the original public land survey corner.

For electronic survey data and analysis contact the firm of Jones, Haugh & Smith Inc.

BOOK 79 PAGE 339

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

E1/4 Corner of Section 26, Township 104N Range 14W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch

☐ On 6/3/04 (DATE) found a 3/4" DIAMETER IRON ROD FLUSH WITH SURFACE

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On _____ (DATE) placed a _____

SKETCH OF REFERENCE TIES

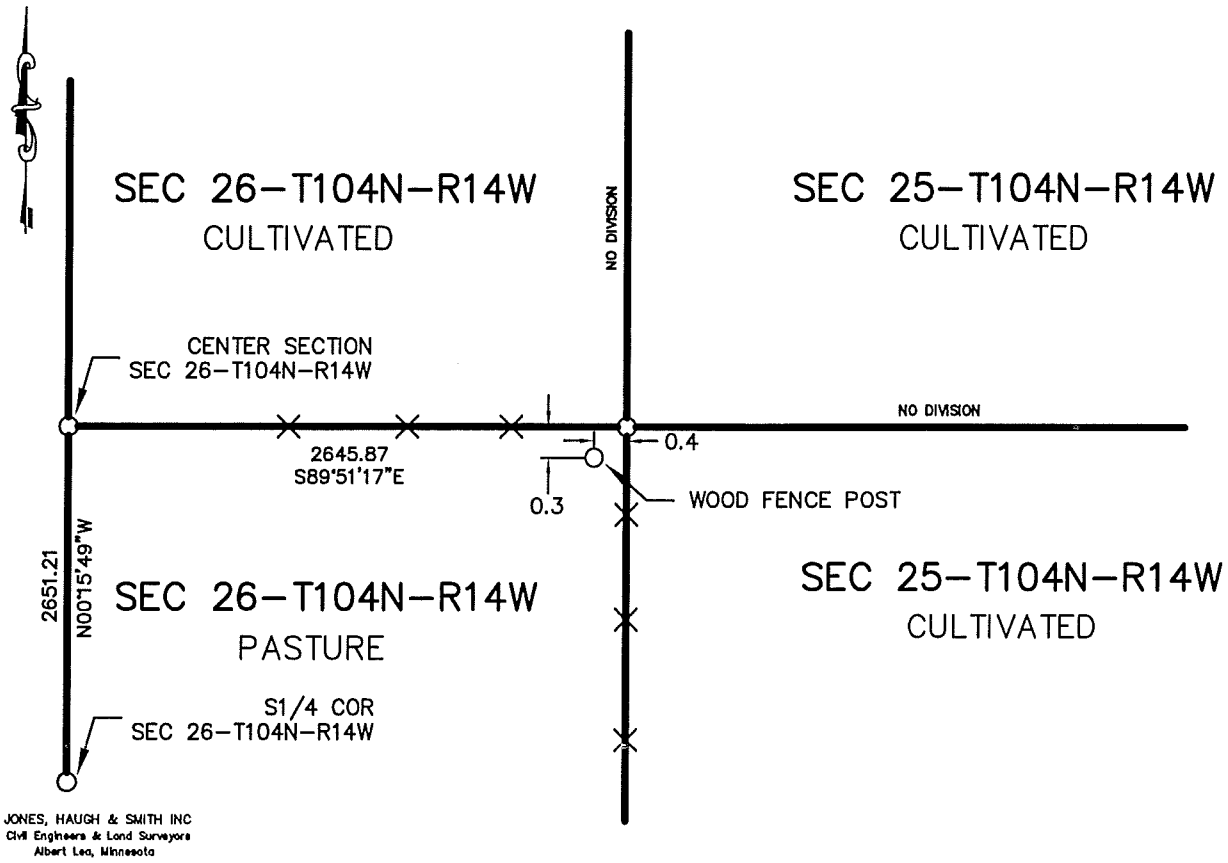

JONES, HAUGH & SMITH INC
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein were prepared by me or under my direct supervision.

_____ 6-29-04
SIGNATURE DATE

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☒ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of _____

I hereby certify that this document was filed in the County Rec. office at _____ .M. on the _____ day of _____ A.D., 20___

COUNTY RECORDER _____

By _____, Deputy

DOCUMENT NO. _____

M.H.D. FORM NO. 2105

E1/4 Corner Section 26-T104N-R14W

Deputy Surveyor John Taylor of the U.S. General Land Office originally established this corner in 1853. The government notes show a wood post was set with mound of earth and trench.

The following were contacted for section corner information.

Mower County Highway Department
Mower County Recorder
Tucker Land Surveying

No record of this corner was obtained from the above mentioned offices.

2004 Yaggy Colby & Associates crew found a ¾" iron rod four tenths East and three tenths North of corner fence post on two way fence intersection.

The monument fits occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

For electronic survey data and analysis, contact the firm of Jones, Haugh and Smith Inc.

Index No. P 92 "A" P 101 x "J"

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

SW Corner of Section 26, Township 104N Range 14W, 5TH P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch:

☐ On 10-13-92 (DATE) found a NO EVIDENCE

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 10-13-92 (DATE) placed a CAST IRON MONUMENT

SKETCH OF REFERENCE TIES

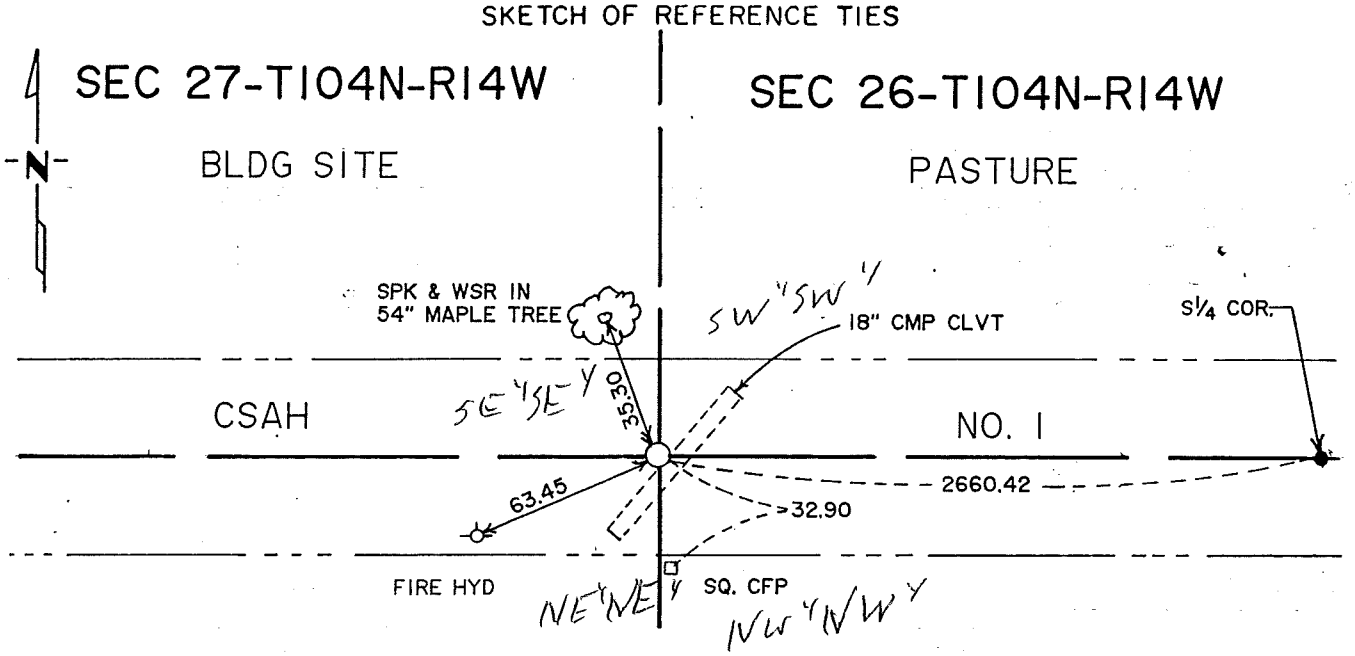

JONES, HAUGH & SMITH INC.
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

SIGNATURE 4-30-93 DATE

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☑ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of Mower

I hereby certify that this document was filed in the County Rec. office at 3 P.M. on the 4 day of May A.D., 19 93

COUNTY RECORDER Edward Enge

By Marlene Marton, Deputy

DOCUMENT NO. 420487.

Bk 79 Misc Pg 340

M.H.D. FORM NO. 2105

STATEMENT OF EVIDENCE

SW 1/4 corner Sec. 26-104-14

This corner was originally established by Deputy Surveyor John Taylor of the U.S. General Land Survey Office in 1853. The government notes show a wood post was set with a mound of earth and trench.

The following were contacted for section corner information:
Mower County Engineering Department
Mower County Recorder
Zenk Engineering
Tucker Land Surveying

The following information was obtained to support evidence of a perpetuation of the original public land survey corner.

1886 Clausen field notes indicate a government post at the southeast corner of Section 27.

1939 Book A, Mower County Highway Department, indicates a stone monument inplace at the northeast corner of Section 34, as shown on 1935 grading plan. The following ties were taken:

N to FP	32.6 ft	NE to double trees	51.6 ft
S to stone	33.5 ft	NW to cor. house	84.7 ft

1966 Book A, Mower County Highway Department, indicates 5/8" diameter iron rod inplace, 2 inches deep. The following ties were taken by L. Sangstone, Reg. No. 5325:

36.65 ft	NNE to 42" Maple	nail & bottle cap
45.85 ft	NE to 42" Maple	nail & bottle cap
36.29 ft	S to corner FP	nail & bottle cap
67.56 ft	SW to tele pole on fence N & S	nail & bottle cap

Dist. to N 1/4 corner Section 35 = 2660.42 ft
Dist. to U.S. #63 = 1015.20 ft
Dist. to railroad = 1275.30 ft

1992 Jones, Haugh & Smith crew under the direction of John H. Schulte IV, dug with county backhoe on centerline CSAH #1 at location of 5/8" diameter iron, 3" deep. Dug to a depth of 2.5 feet below road surface and uncovered a 18" CMP culvert running diagonally across road. Testimony of County Highway Department indicates culvert was replaced in 1978 more or less, destroying any perpetuation. Prior to 1978 a cast iron monument at road surface using L. Sangstone distance of 2660.42 feet from N 1/4 Section 35. Corner is set 1.4 feet east of 5/8" diameter iron found on road surface.

This monument fits occupation and road centerlines within the section and is accepted as best evidence of the original public land survey corner.

For electronic survey data and analysis contact the firm of Jones, Haugh & Smith Inc.

BOOK 79 PAGE 241

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

N1/4 Corner of Section 27, Township 104N, Range 14W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch:

☐ On 6-4-90 (DATE) found a 5"x8"x12" pointed field stone over a nest of stones 2.5' below road surface in virgin soil.

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 6-4-90 (DATE) placed a 5/8"Ø iron on the south side of stone found.

SKETCH OF REFERENCE TIES

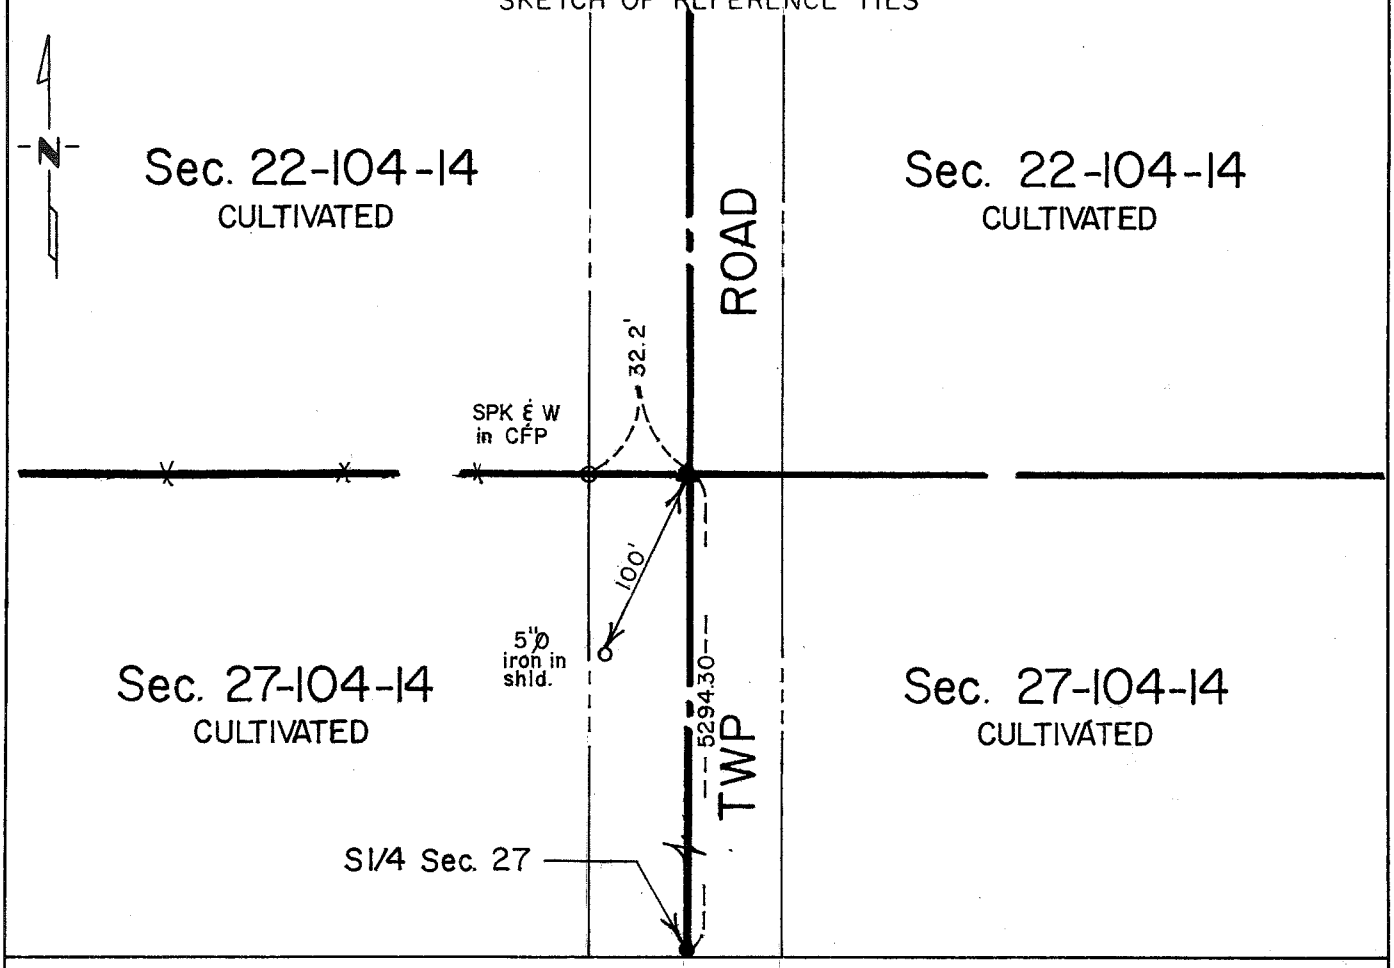

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

SIGNATURE _____ DATE 9-17-90

Registration No. 13807

☒ Land Surveyor, ☐ Professional Engineer

☐ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER

County of _____

I hereby certify that this document was filed in the County Rec. office at _____ .M. on the _____ day of _____ A.D., 19 ___

COUNTY RECORDER _____

By _____, Deputy

DOCUMENT NO. _____

M.H.D. FORM NO. 2105

STATEMENT OF EVIDENCE

N 1/4 corner Section 27-104-14

This corner was originally established by Deputy Surveyor John Taylor of the U.S. General Land Survey Office in 1853. The government notes show this corner was marked with a wood post and a trench and a mound of earth.

The following were contacted for section corner information:

Mower County Engineering Department
Mower County Recorder's Office

1990 Jones, Haugh & Smith crew together with the Mower County backhoe dug on centerline of north-south road in line with fence west and uncovered a 5"x8"x12" pointed field stone over a nest of stones 2.5' deep in virgin soil. Placed a 5/8" diameter iron capped 13807 on the south side of a pointed field stone.

Corner found fits occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the public land survey corner.

For electronic survey data and analysis contact the firm of Jones, Haugh & Smith Inc.

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

S1/4 Corner of Section 27, Township 104N, Range 14W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch:

☐ On 6-4-90 (DATE) found a no evidence

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 6-4-90 (DATE) placed a 5/8"Ø iron capped (13807) on a straight line between SW & SE corners and in line with fence South.

SKETCH OF REFERENCE TIES

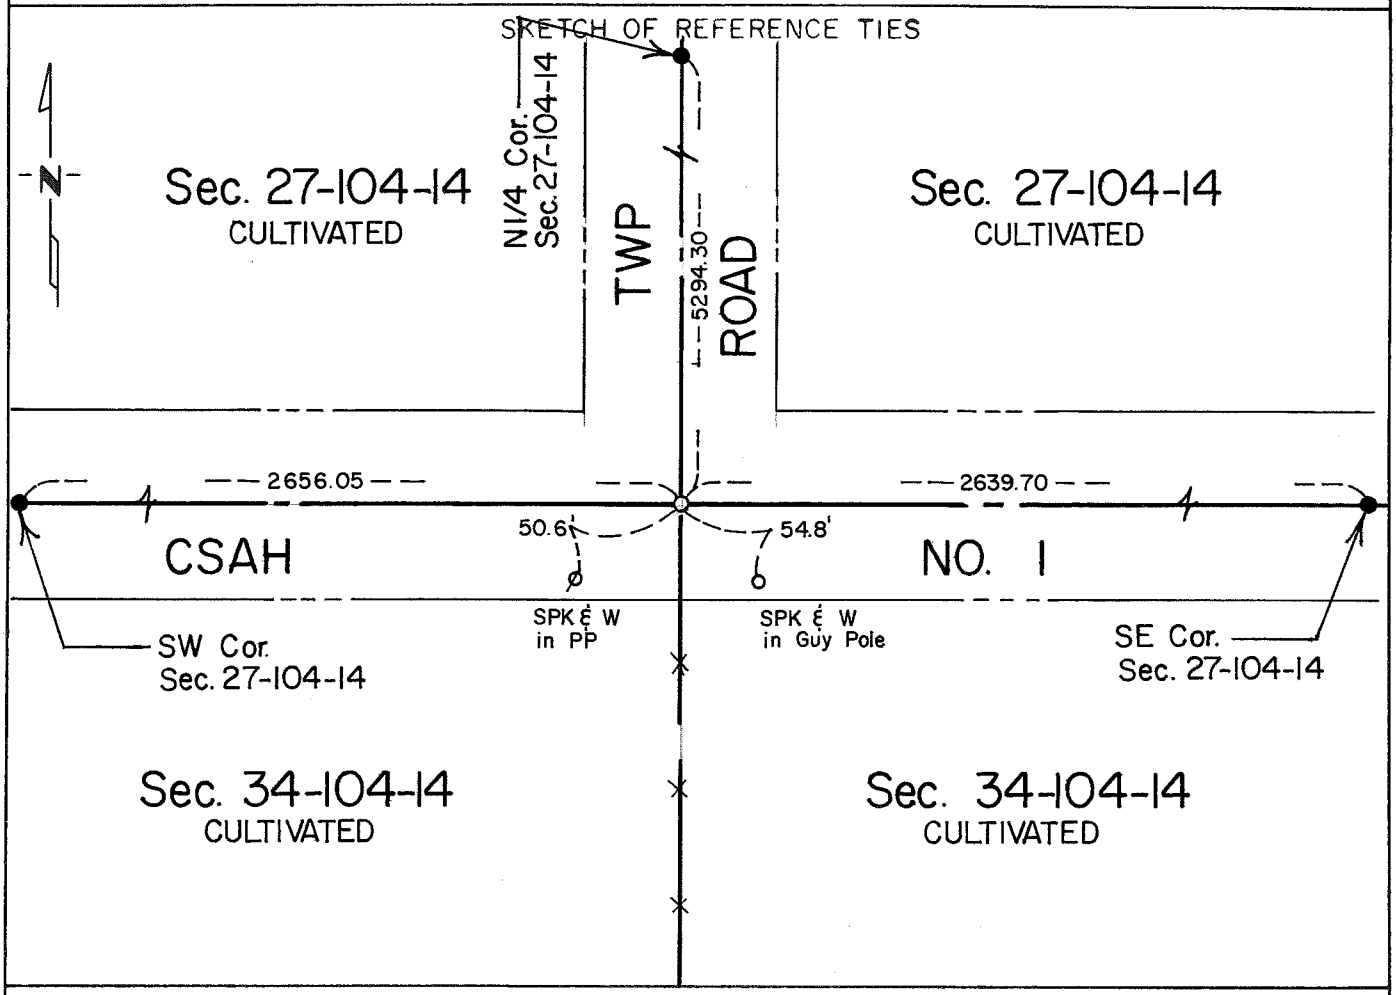

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

SIGNATURE _____ DATE 9-17-90

Registration No. 13807

☒ Land Surveyor, ☐ Professional Engineer

☐ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER

County of _____

I hereby certify that this document was filed in the County Rec. office at _____ .M. on the _____ day of _____ A.D., 19__

COUNTY RECORDER _____

By _____, Deputy

DOCUMENT NO. _____

M.H.D. FORM NO. 2105

STATEMENT OF EVIDENCE

S 1/4 corner Section 27-104-14

This corner was originally established by Deputy Surveyor John Taylor of the U.S. General Land Survey Office in 1853. The government notes show this corner was marked with a wood post and a trench and a mound of earth.

The following were contacted for section corner information:

Mower County Engineering Department
Mower County Recorder's Office

1990 Jones, Haugh & Smith crew together with the Mower County backhoe dug 4'x8'x5' deep hole in virgin soil and found no evidence or perpetuation of the public land survey corner. Placed a 5/8" diameter iron capped (13807) on a straight line between Southwest and Southeast section corners in line with the fence south.

This location fits occupation and road centerlines and is accepted as best evidence of the public land survey corner.

For electronic survey data and analysis contact the firm of Jones, Haugh & Smith Inc.

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

NE Corner of Section 28, Township 104N Range 14W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch

☐ On 11/18/1999 (DATE) found a CONCRETE MONUMENT WITH A 3/4" REBAR INSIDE.

☒ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 11/18/1999 (DATE) placed a 3/4" X 20" IRON PIPE ABOVE CONCRETE MONUMENT FOUND

SKETCH OF REFERENCE TIES

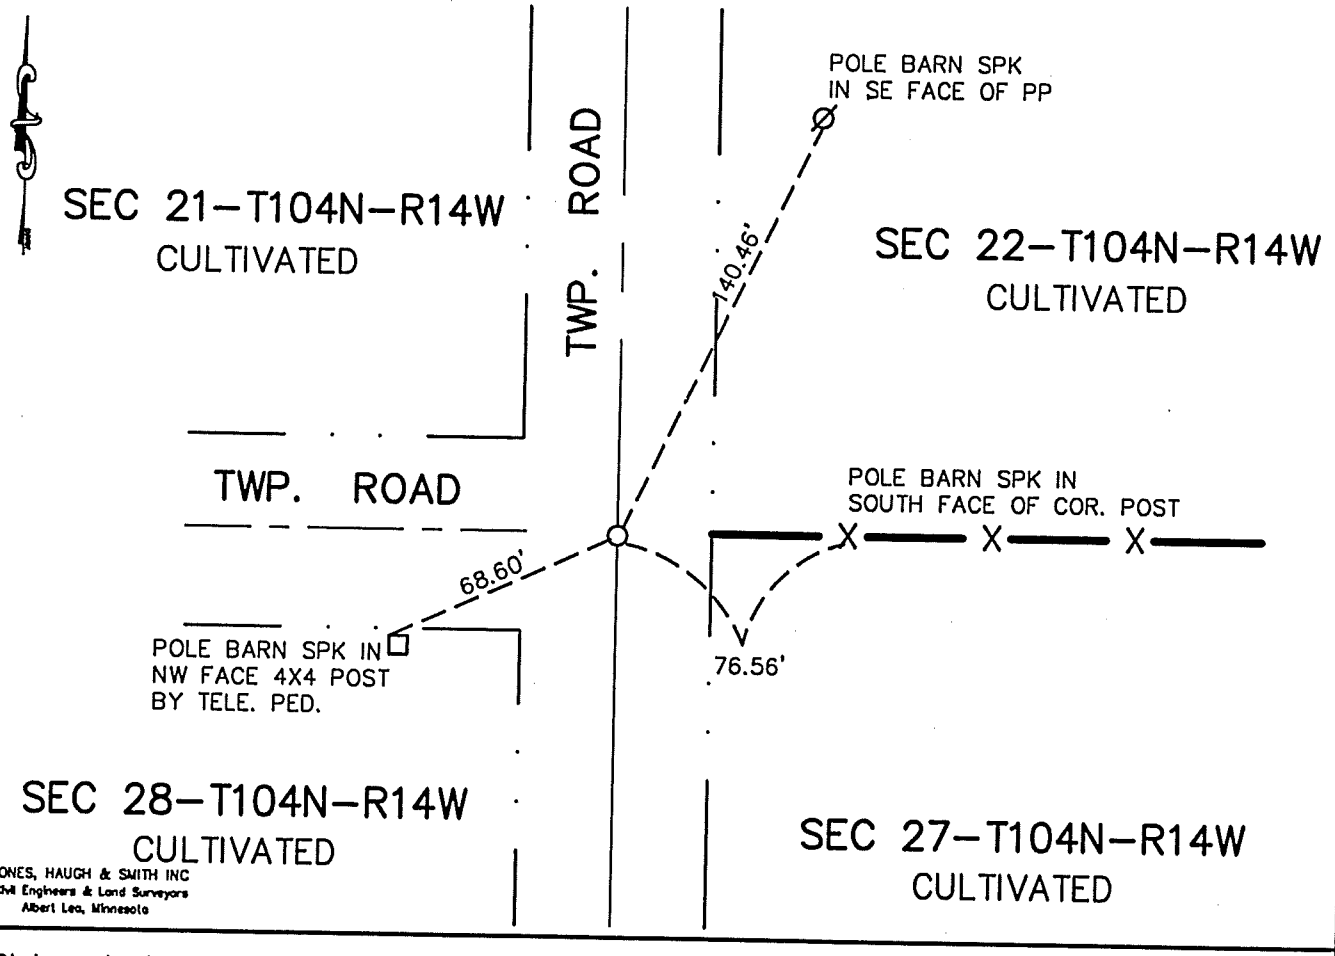

JONES, HAUGH & SMITH INC
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein were prepared by me or under my direct supervision.

_____ (SIGNATURE) 12-10-99 (DATE)

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☒ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of _____

I hereby certify that this document was filed in the County Rec. office at _____ .M. on the _____ day of _____ A.D., 19___

COUNTY RECORDER _____

By _____, Deputy

DOCUMENT NO. _____

M.H.D. FORM NO. 2105

NE Cor Sec 28-104-14

This corner was originally established by Deputy Surveyor John Taylor of the U.S. General Land Office in 1853. The government notes show a wood post was set with mound of earth and trench.

The following were contacted for section corner information.

Mower County Highway Dept.
Mower County Recorder
Tucker Land Surveying

No record of this corner was obtained from the above mentioned offices.

1999 Jerome Schwarz, RLS 13810, dug with a backhoe at intersection of North-South Twp. Road, and centerline of Twp. Road going West. At a depth of 2'+/- below 2nd roadbed, found a concrete monument with a 3/4" rebar, set inside a 6" clay tile, and a wooden hub along side. Left monument in place, and set a 3/4" X 20" iron pipe above monument and 0.4' below road surface.

Corner falls on intersection of Twp. Roads, and 1'+/- North of fence running east.

The monument fits occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

For electronic survey data and analysis, contact the firm of Jones, Haugh and Smith Inc.

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

E1/4 Corner of Section 28, Township 104N Range 14W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch

☐ On 11/18/1999 (DATE) found a WITH METAL LOCATOR, FOUND A 1/2" X 24" PIPE, 0.5' DOWN

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On _____ (DATE) placed a _____

SKETCH OF REFERENCE TIES

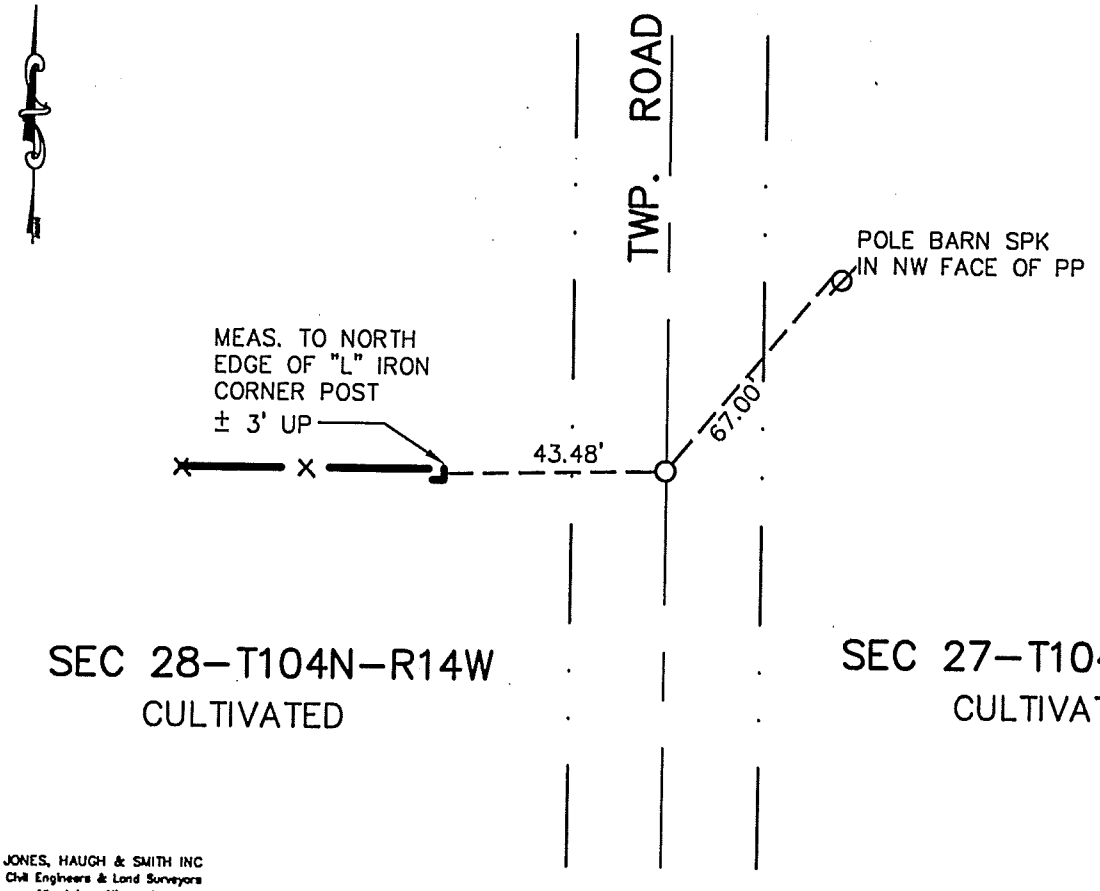

JONES, HAUGH & SMITH INC
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein were prepared by me or under my direct supervision.

_____ (SIGNATURE) 12-10-99 (DATE)

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☒ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER

County of _____

I hereby certify that this document was filed in the County Rec. office at _____ .M. on the _____ day of _____ A.D., 19___

COUNTY RECORDER _____

By _____, Deputy

DOCUMENT NO. _____

M.H.D. FORM NO. 2105

E 1/4 Cor Sec 28-104-14

This corner was originally established by Deputy Surveyor John Taylor of the U.S. General Land Office in 1853. The government notes show a wood post was set with mound of earth and trench.

The following were contacted for section corner information.

Mower County Highway Dept.
Mower County Recorder
Tucker Land Surveying

No record of this corner was obtained from the above mentioned offices.

1999 Corner location by Jerome Schwarz, RLS #13810
With metal locator, found a 1/2" x 24" iron pipe down 0.5'. Tied off the pipe, then dug a hole with a backhoe, 8'x8'x3.5' deep through the 2nd roadbed, into undisturbed soil. Found nothing.
Using ties, reset pipe in its original found location, and accepted it as perpetuation of PLS corner.

Corner falls on line with fence to the west, and 0.8' +/- east of centerline of Twp. Road.

The monument fits occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

For electronic survey data and analysis, contact the firm of Jones, Haugh and Smith Inc.

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

N1/4 Corner of Section 30, Township 104N, Range 14W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch:

☒ On 10-17-91 (DATE) found a Harrison Cast iron monument over a 6" dia. concrete monument 3' below road surface

☒ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On _____ (DATE) placed a _____

SKETCH OF REFERENCE TIES

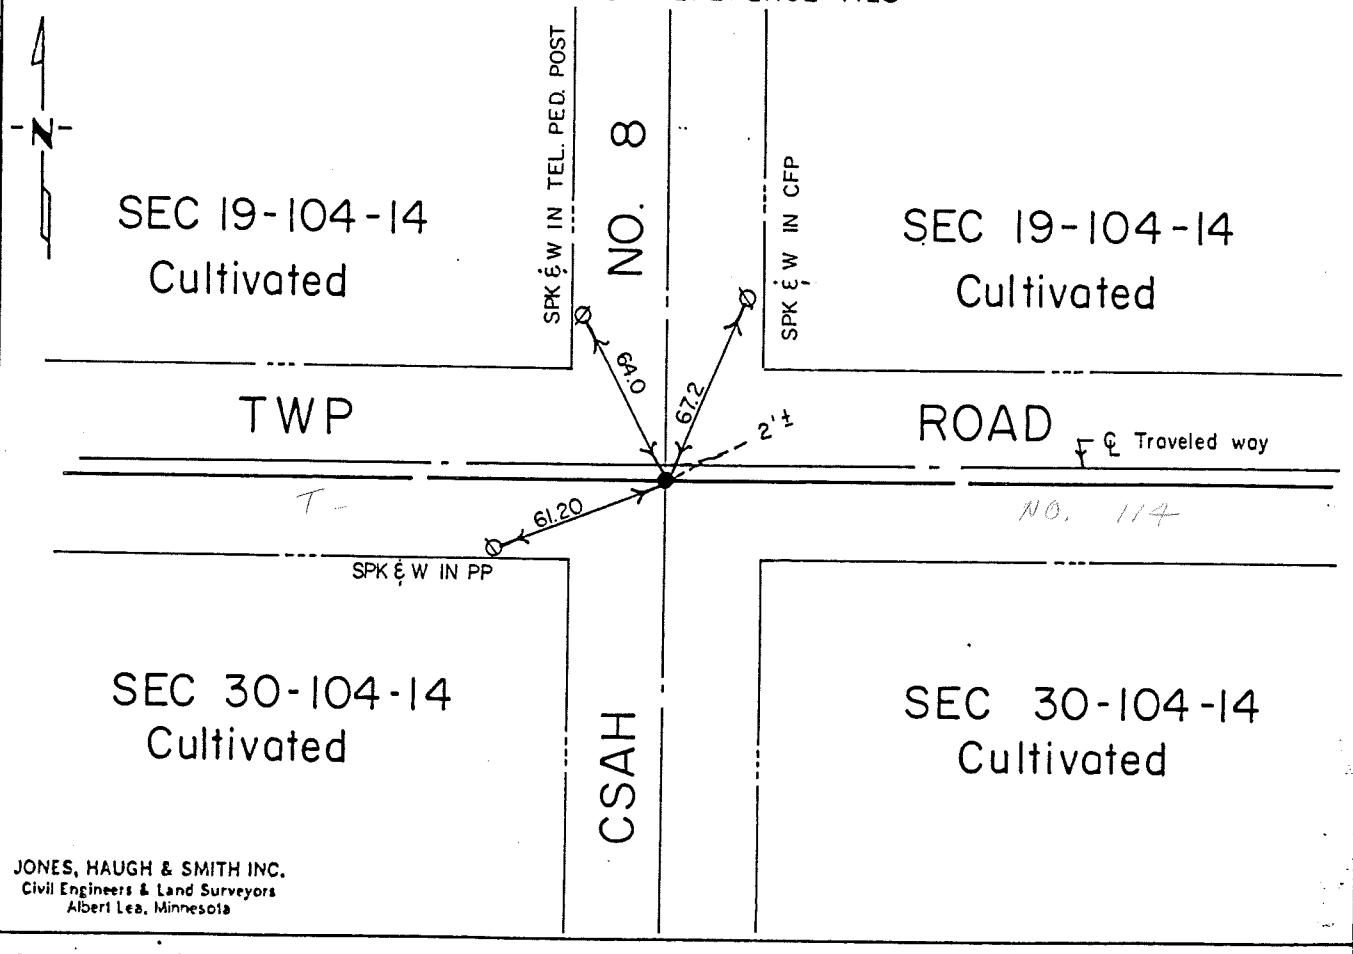

JONES, HAUGH & SMITH INC.
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

SIGNATURE _____ DATE 12-9-91

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☐ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of _____

I hereby certify that this document was filed in the County Rec. office at _____ .M. on the _____ day of _____ A.D., 19 ___

COUNTY RECORDER _____

By _____, Deputy

DOCUMENT NO. _____

M.H.D. FORM NO. 2105

STATEMENT OF EVIDENCE

N 1/4 corner Section 30-104-14

This corner was originally established by Deputy Surveyor John Taylor of the U.S. General Land Office in 1854. The government notes show a wood post was set with a mound of earth and trench.

The following were contacted for section corner information:
Mower County Recorder's Office
Mower County Highway Department
Zenk Engineering
Tucker Land Surveying

1930 Mower County Grading Plans show a concrete monument inplace on centerline centerline of north-south-east-west roads and the following ties were taken:
85.2' ENE to first fence post
29.5' SE to headwall
29.1' SW to headwall

1965 Book 'A' in the Office of the Mower County Engineer shows a concrete monument inplace and the following ties were taken:
60.6' SW to PP
85.2' ENE to first steel fence post
39.8' ESE to top south end 30" RCP
52.4' NE to TP

1991 Jones, Haugh & Smith Inc crew under the direction of John Schulte, County Surveyor, dug with the County backhoe on centerline centerline of north-south-east-west roads and uncovered a harrison cast iron monument. No records found to support who placed monument. Continued digging and found cast iron monument over a 6" diameter concrete monument 3 feet below road surface in virgin soil, which agrees with past records. Left concrete monument as found and reset cast iron monument over on road surface.

The monument found fits occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

For electronic survey data & analysis contact the firm of Jones, Haugh & Smith Inc.

Revised

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

NW Corner of Section 31, Township 104N Range 14W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch

☐ On 05/25/1993 (DATE) found a –

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 05/25/1993 (DATE) placed a CAST IRON MONUMENT.

SKETCH OF REFERENCE TIES

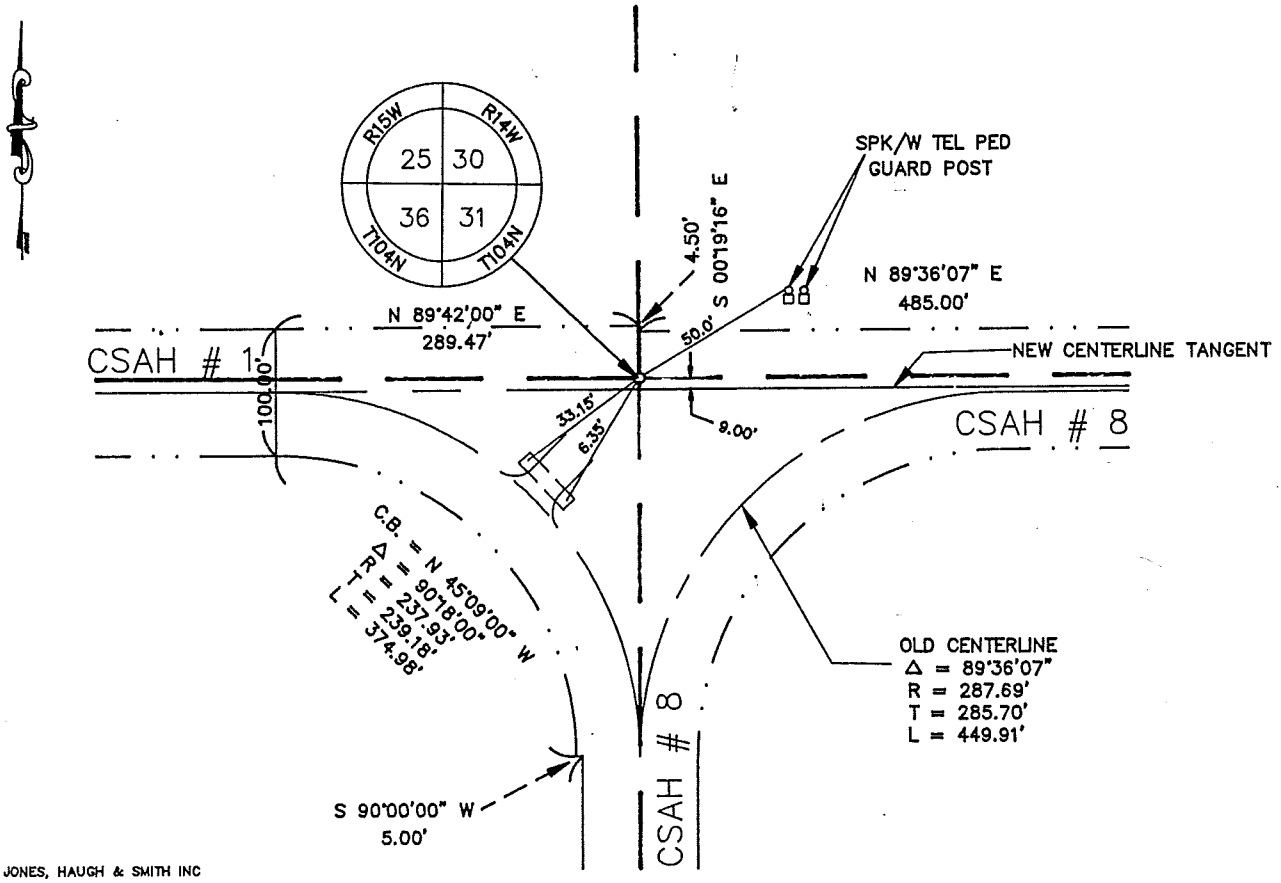

JONES, HAUGH & SMITH INC
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein were prepared by me or under my direct supervision.

_____ _____
SIGNATURE DATE

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☐ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of _____

I hereby certify that this document was filed in the County Rec. office at _____ .M. on the _____ day of _____ A.D., 19___

COUNTY RECORDER _____

By _____ Deputy

DOCUMENT NO. _____

M.H.D. FORM NO. 2105

STATEMENT OF EVIDENCE

NW cor Sec 31-104-14

This corner was originally established by Deputy Surveyor John Ball of the U.S. General Land Office in 1853. The government notes show a wood post and small stones were set with a mound of earth and trench.

The following were contacted for section corner information:
Mower County Highway Department
Mower County Recorder
Zenk Engineering
Tucker Land Surveying

The following information was obtained to support evidence of the perpetuation of the original public land survey corner.

1889 Clausen, Mower County Surveyors, indicates a government post at this corner.

1945 Mower County Highway Dept Book 1 indicates a concrete monument inplace at this corner.

1945 Mower County Road Plans indicate a concrete monument inplace 13.5 feet north of County State Aid Highway No. 8 curve PI.

1993 Jones, Haugh & Smith Inc crew under the direction of John H. Schulte IV, RLS 13807, dug a 4'x3'x10' hole 13.5 feet north of iron monument found at County Road PI and also in line with north-south centerline of County State Aid Highway No. 8 and found no evidence of concrete monument or the original public land survey corner. Therefore we set a cast iron monument near the road surface using a distance of 13.5 feet north of the County Road PI and in line with the centerline of north-south County State Aid Highway No. 8 according to County State Aid Highway No. 8 Road Plans.

The monument set fits occupation lines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

NW Corner of Section 31, Township 104N Range 14W, 5TH P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch:

☐ On 5-25-93 (DATE) found a NOTHING

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 5-25-93 (DATE) placed a CAST IRON MONUMENT

SKETCH OF REFERENCE TIES

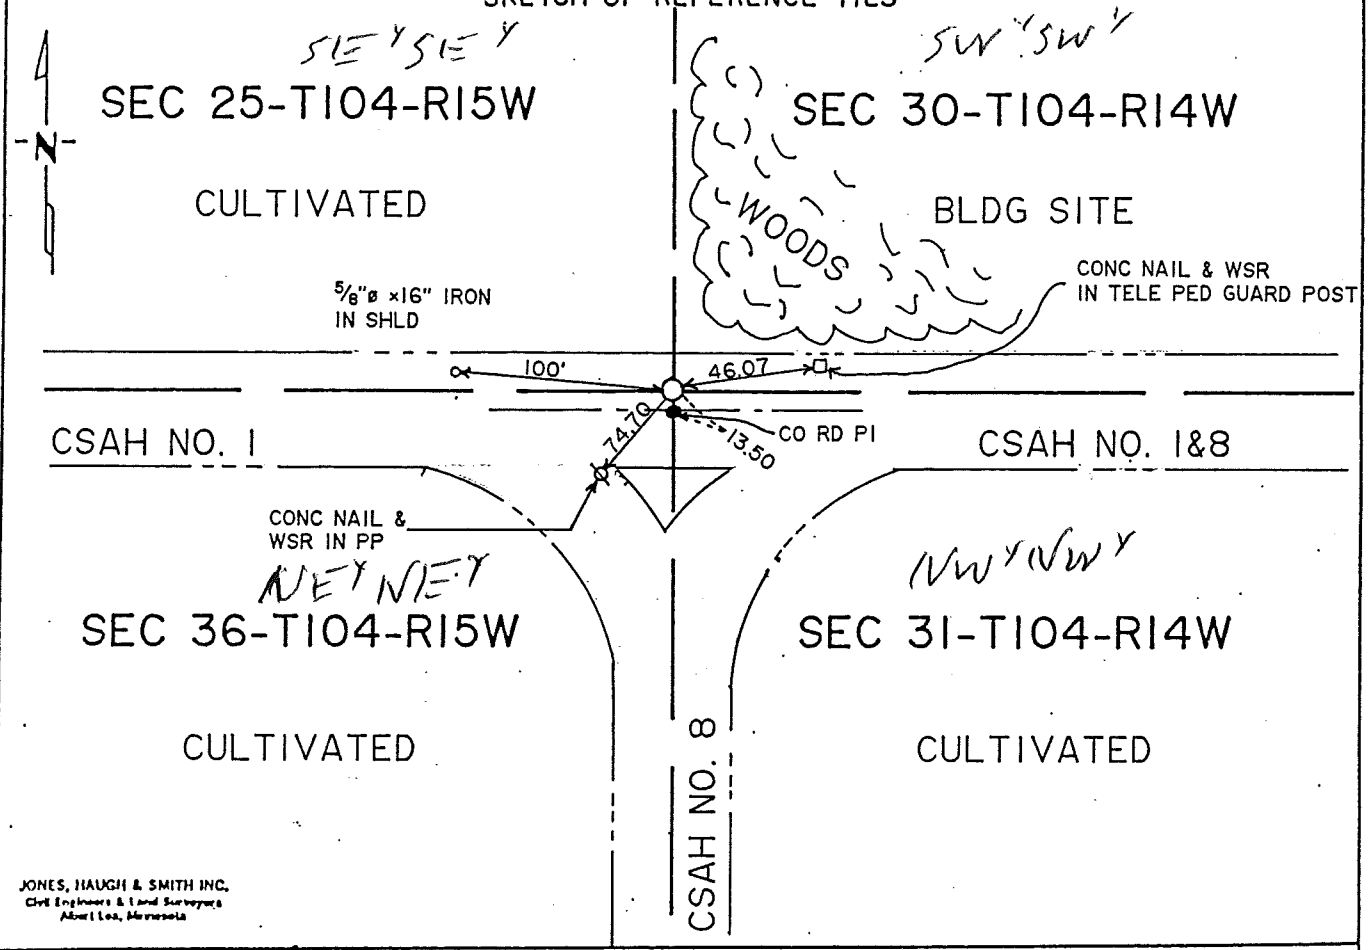

JONES, HAUGH & SMITH INC.
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

SIGNATURE _____ DATE 6-11-93

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☒ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of Mower

I hereby certify that this document was filed in the County Rec. office at 10 A.M. on the 21 day of June A.D., 19 93

COUNTY RECORDER Orlando Enger

By Marlene Martin, Deputy

DOCUMENT NO. 421595 Bk 79 Misc Pg. 594

M.H.D. FORM NO. 2105 BOOK 79 PAGE 594

STATEMENT OF EVIDENCE

NW cor Sec 31-104-14

This corner was originally established by Deputy Surveyor John Ball of the U.S. General Land Office in 1853. The government notes show a wood post and small stones were set with a mound of earth and trench.

The following were contacted for section corner information:
Mower County Highway Department
Mower County Recorder
Zenk Engineering
Tucker Land Surveying

The following information was obtained to support evidence of the perpetuation of the original public land survey corner.

1889 Clausen, Mower County Surveyors, indicates a government post at this corner.

1945 Mower County Highway Dept Book 1 indicates a concrete monument inplace at this corner.

1945 Mower County Road Plans indicate a concrete monument inplace 13.5 feet north of County State Aid Highway No. 8 curve PI.

1993 Jones, Haugh & Smith Inc crew under the direction of John H. Schulte IV, RLS 13807, dug a 4'x3'x10' hole 13.5 feet north of iron monument found at County Road PI and also in line with north-south centerline of County State Aid Highway No. 8 and found no evidence of concrete monument or the original public land survey corner. Therefore we set a cast iron monument near the road surface using a distance of 13.5 feet north of the County Road PI and in line with the centerline of north-south County State Aid Highway No. 8 according to County State Aid Highway No. 8 Road Plans.

The monument set fits occupation lines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

BOOK 79 PAGE 595

Revised

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

N1/4 Corner of Section 31, Township 104N Range 14W, 5TH P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch:

☐ On 5-25-93 (DATE) found a 3/4"ø x 16" IRON AND A 6"ø x 18" CONC MON. WITH IRON IN CNT

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 5-25-93 (DATE) placed a CAST IRON MONUMENT

SKETCH OF REFERENCE TIES

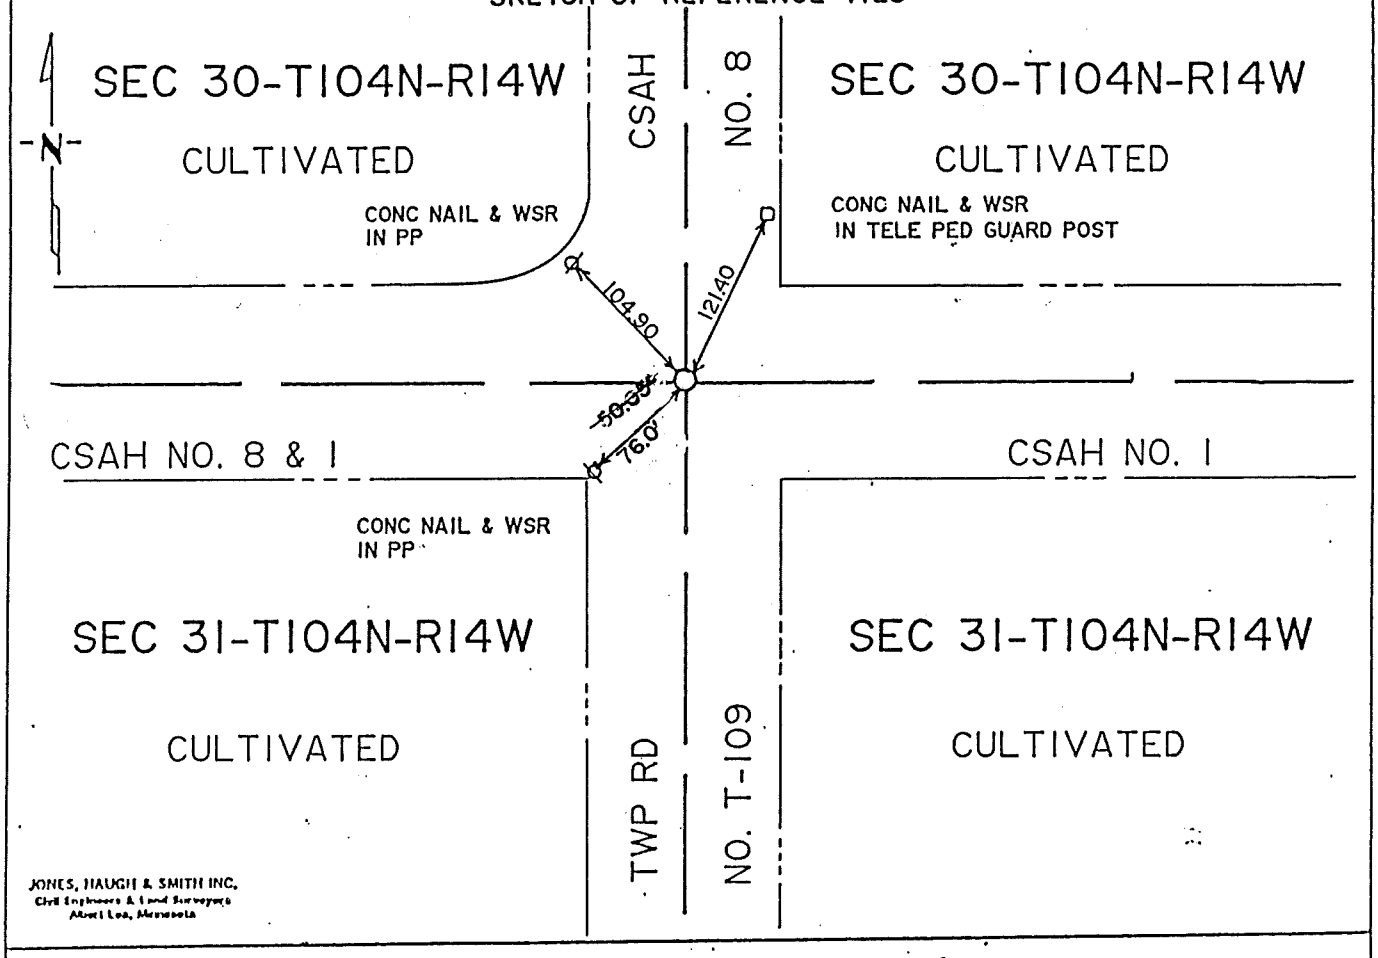

JONES, HAUGH & SMITH INC.
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

_____ SIGNATURE _____ DATE

Registration No. _____

☐ Land Surveyor, ☐ Professional Engineer

☐ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER

County of _____

I hereby certify that this document was filed in the County Rec. office at _____ .M. on the _____ day of _____ A.D., 19__

COUNTY RECORDER _____

By _____, Deputy

DOCUMENT NO. _____

M.H.D. FORM NO. 2105

STATEMENT OF EVIDENCE

N 1/4 corner Section 31-104-14

This corner was originally established by Deputy Surveyor John Taylor of the U.S. General Land Office in 1854. The government notes show a wood post was set with a mound of earth and trench.

The following were contacted for section corner information:
Mower County Recorder's Office
Mower County Highway Department
Zenk Engineering
Tucker Land Surveying

1930 Mower County Grading Plans show a concrete monument inplace at Sta 0+00 4.8' south of centerline PI and the following ties were taken:
91.2' NW to TP
67.2' SW to fence post

1938 Book 'A' in the Office of the Mower County Engineer shows a concrete monument 4.8' south of centerline and the following ties were taken:
42.1' SE to Cottonwood
67.2' SW to fence post
91.2' NW to TP
82.9' NE to north end culvert

1965 Book 'A' in the Office of the Mower County Engineer shows a monument found 4.8' south of the centerline CSAH #1 and the following ties were taken:
55.5' SW to CFP
47.8' SW to PP
110.5' NW to TP

1991 Jones, Haugh & Smith Inc crew under the direction of John Schulte, County Surveyor, dug with the County backhoe 4.8' south of the centerline CSAH #1 in line with centerline north-south and found no evidence of public land survey corner or concrete monument recorded in County records. Therefore dug with backhoe on centerline centerline and uncovered a 1/2" diameter iron cast in the center of a 6" diameter concrete monument and established position of corner on centerline of north-south road 4.8' south of centerline PI as last recorded in Book 'A' in 1965. A cast iron monument was set on road surface and a capped 5/8" diameter iron RLS 13807 was set over concrete monument at centerline PI.

The monument found fits occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

For electronic survey data & analysis contact the firm of Jones, Haugh & Smith Inc.

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

N1/4 Corner of Section 31, Township 104N Range 14W, 5TH P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch:

☐ On 5-25-93 (DATE) found a 3/4"ø x 16" IRON AND A 6"ø x 18" CONC MON. WITH IRON IN CNT

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 5-25-93 (DATE) placed a CAST IRON MONUMENT

SKETCH OF REFERENCE TIES

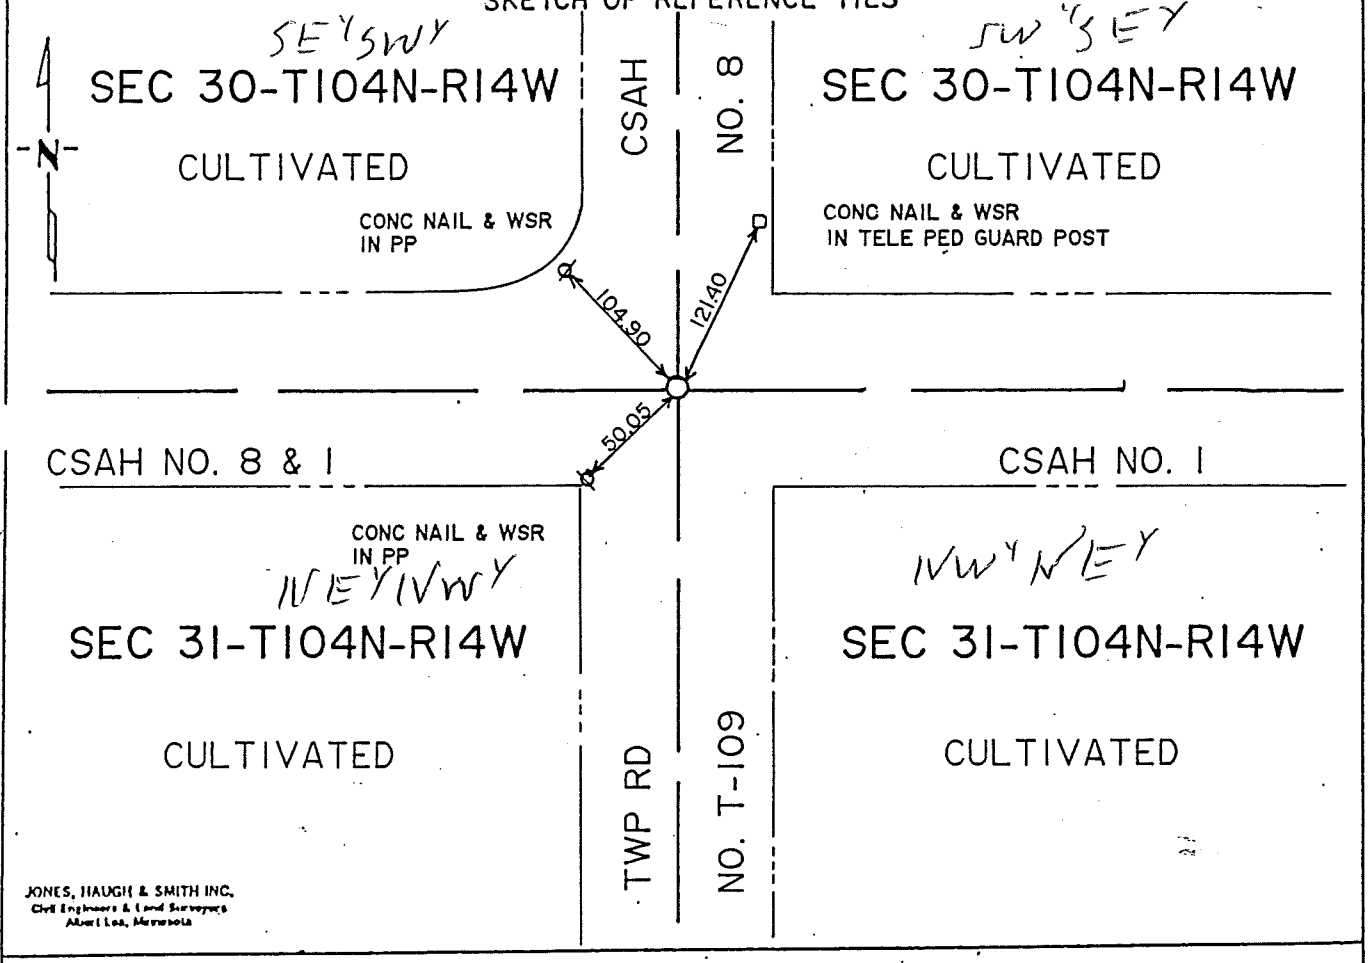

JONES, HAUGH & SMITH INC.
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

SIGNATURE _____ DATE 6-11-93

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☑ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of Mower

I hereby certify that this document was filed in the County Rec. office at 10 A .M. on the 21 day of June, A.D., 19 93

COUNTY RECORDER Charles Engel

By Marlene Martin, Deputy

DOCUMENT NO. 421594

Bk 79 Misc Pg. 592

M.H.D. FORM NO. 2105

BOOK 79 PAGE 592

STATEMENT OF EVIDENCE

N 1/4 cor Sec 31-104-14

This corner was originally established by Deputy Surveyor John Taylor of the U.S. General Land Office in 1853. The government notes show a wood post was set with a mound of earth and trench.

The following were contacted for section corner information:
Mower County Highway Department
Mower County Recorder
Zenk Engineering
Tucker Land Surveying

The following information was obtained to support evidence of the perpetuation of the original public land survey corner.

1938 Mower County Highway Dept Book 1 indicates a tile monument inplace at this corner.

1945 Mower County Road Plans indicate a concrete monument inplace at this corner.

1993 Jones, Haugh & Smith Inc crew under the direction of John H. Schulte IV, RLS 13807, dug a 3'x3'x6' hole on the centerline centerline intersection of County State Aid Highway No. 1. We found a 3/4" diameter x 16" iron four inches below road surface and a 6" diameter x 18" concrete monument with an iron in center at a depth of three feet. The monuments found are in agreement with the records. Therefore we accepted monuments found as the perpetuation of the original public land survey corner and left concrete monument as found and set a cast iron monument near road surface and above concrete monument.

The monument set fits occupation lines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

NE Corner of Section 31, Township 104N Range 14W, 5TH P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch:

☐ On 5-28-93 (DATE) found a ¾"ø x 18" IRON AND A 6"ø x 18" CONC MON WITH IRON IN CNT

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 5-28-93 (DATE) placed a CAST IRON MONUMENT

SKETCH OF REFERENCE TIES

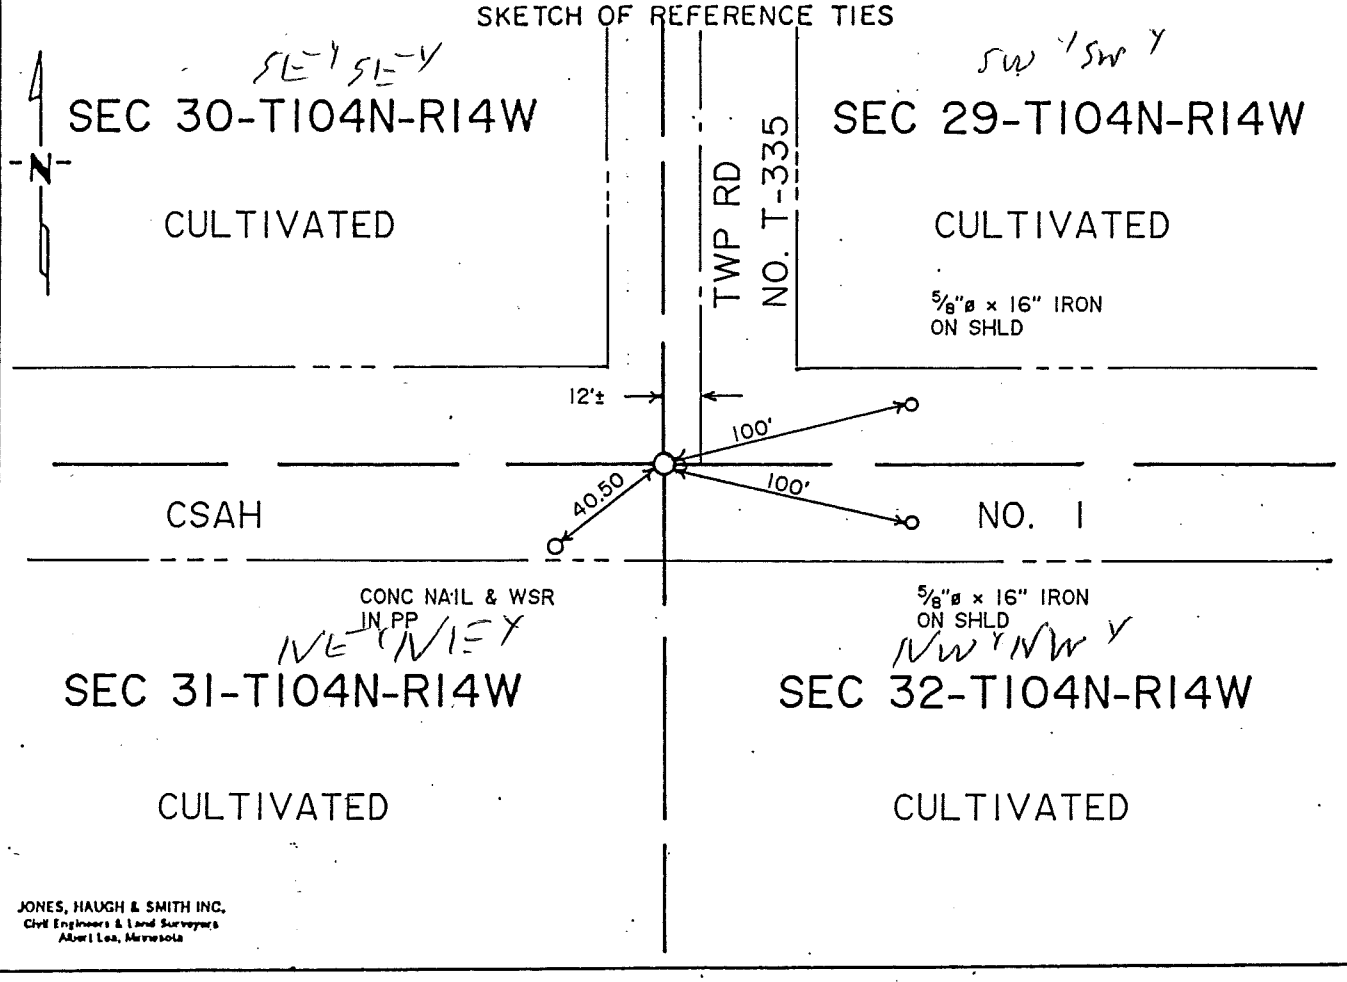

JONES, HAUGH & SMITH INC.
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

_____ (SIGNATURE) 6-11-93 (DATE)

Registration No. 13007

☐ Land Surveyor, ☐ Professional Engineer

☐ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of Mower

I hereby certify that this document was filed in the County Rec. office at 10 A .M. on the 21 day of June A.D., 19 93

COUNTY RECORDER Grants. Engan

By Marlene Martin, Deputy

DOCUMENT NO. 121596

Bk 79 Misc Pg. 596

M.H.D. FORM NO. 2105

BOOK 79 PAGE 596

STATEMENT OF EVIDENCE

NE cor Sec 31-104-14

This corner was originally established by Deputy Surveyor John Taylor of the U.S. General Land Office in 1853. The government notes show a wood post was set with a mound of earth and trench.

The following were contacted for section corner information:
Mower County Highway Department
Mower County Recorder
Zenk Engineering
Tucker Land Surveying

The following information was obtained to support evidence of the perpetuation of the original public land survey corner.

1939 Mower County Highway Dept Book 1 indicates a stone inplace at this corner.

1945 Mower County Road Plans indicate a concrete monument inplace at this corner.

1993 Jones, Haugh & Smith Inc crew under the direction of John H. Schulte IV, RLS 13807, dug a 4'x3'x6' hole 12 feet more or less, west of the centerline of the township road running north and on the centerline of County State Aid Highway No. 1 according to 1945 Grading Plans. We found a 3/4" diameter x 18" iron four inches below road surface and a 6" diameter x 18" concrete monument with an iron in center at a depth of three feet. The monuments found are in agreement with the records. Therefore we accepted monuments found as the perpetuation of the original public land survey corner and set a cast iron monument near road surface and above concrete monument found.

The monuments found and cast iron monument set fits occupation lines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

NE Corner of Section 32, Township 104N Range 14W, 5TH P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch:

☐ On 5-27-93 (DATE) found a 3/4"ø x 16" PIPE

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 5-27-93 (DATE) placed a 5/8"ø x 16" IRON

SKETCH OF REFERENCE TIES

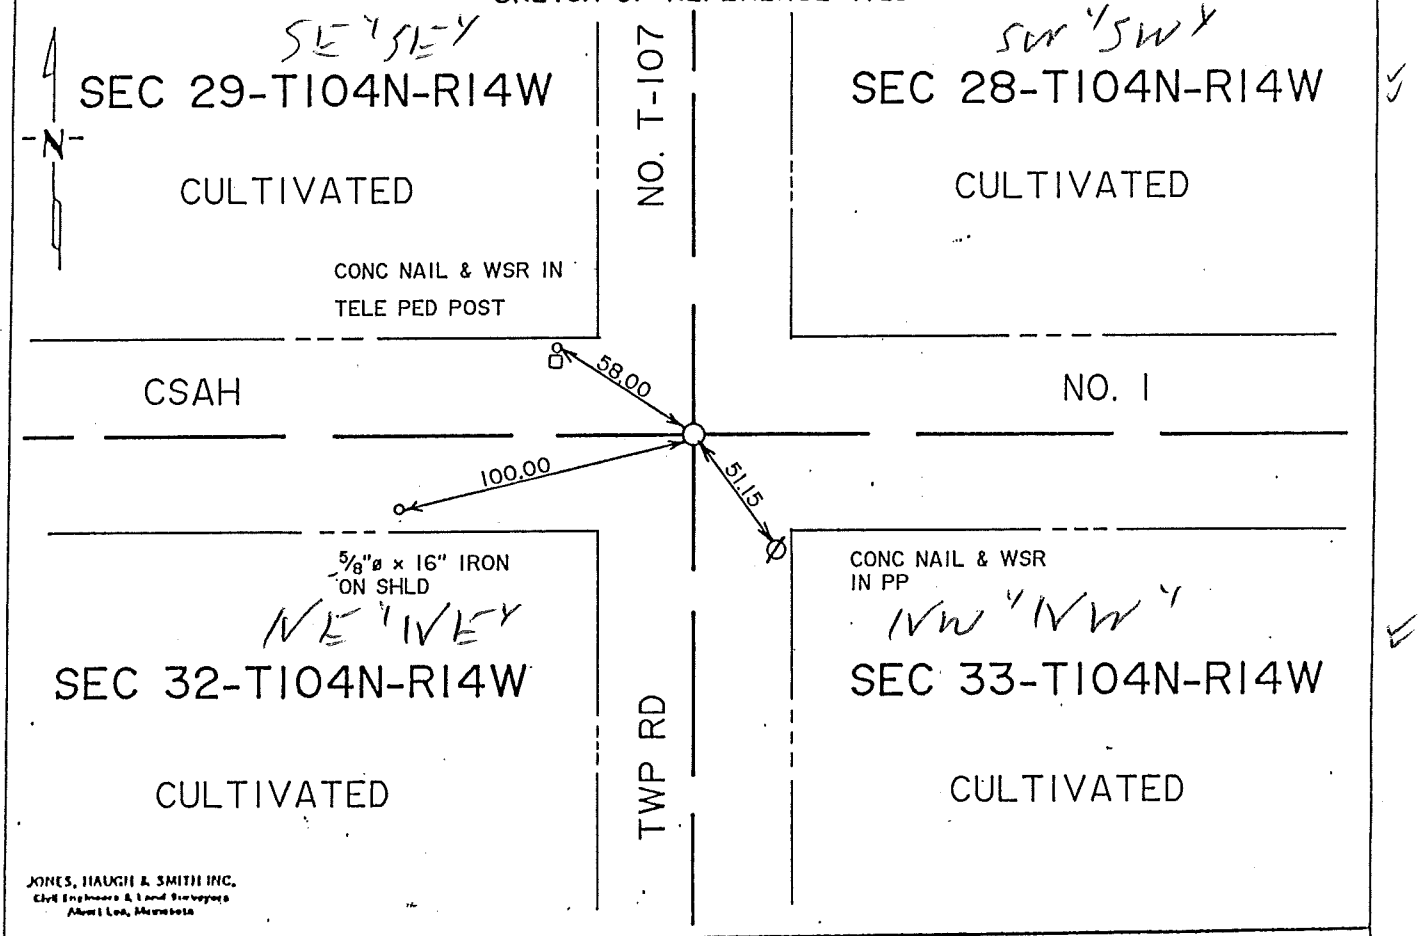

JONES, HAUGH & SMITH INC.
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

[signature] 7-14-93
SIGNATURE DATE

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☒ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of Mower

I hereby certify that this document was filed in the County Rec. office at 2 P.M. on the 15 day of July A.D., 19 93

COUNTY RECORDER Charles Engel

By Marlene Martin, Deputy

DOCUMENT NO. 422859

Bk 80 Misc Pg 329

M.H.D. FORM NO. 2105

BOOK 80 PAGE 329

STATEMENT OF EVIDENCE

NE corner Section 32-104-14

This corner was originally established by Deputy Surveyor John Taylor of the U.S. General Land Office in 1853. The government notes show a wood post was set with a mound of earth and trench.

The following were contacted for section corner information:
Mower County Recorder's Office
Mower County Highway Department
Zenk Engineering
Tucker Land Surveying

The following information was obtained to support evidence of a perpetuation of the original public land survey corner.

1939 Mower County Highway Department, Book 1, indicates an iron pin inplace at this corner. The following ties were taken:
Stake SSE 75' Stake SSW 74'
Stake NNE 75' Stake NNW 75'

No Date Mower County Highway Department County Road Plans indicates that section corner is on centerline centerline of County State Aid Highway No. 1 and north-south township road.

1993 Jones, Haugh & Smith Inc crew under the direction of John Schulte, RLS 13807, searched area for section corner ties noted in above information and found nothing. We then dug on centerline centerline of intersection with county backhoe a 4'x4'x8' long hole and found a 3/4" diameter x 16" pipe four inches below road surface. We continued digging to a depth of four feet which was into virgin soil and found no evidence of the original public land survey corner. Therefore we accepted 3/4" diameter x 16" pipe as the perpetuation of the original public land survey corner and set a 5/8" diameter x 16" iron near road surface and above monument found.

The monument set fits occupation lines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

BOOK 80 PAGE 330

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

N1/4 Corner of Section 32, Township 104N Range 14W, 5TH P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch:

☐ On 5-27-93 (DATE) found a NOTHING

☐ left monument as found, ☐ lowered monument; ☐ removed monument (explain)

☐ On 6-30-93 (DATE) placed a 5/8"ø x 16" IRON CAPPED RLS NO. 13807

SKETCH OF REFERENCE TIES

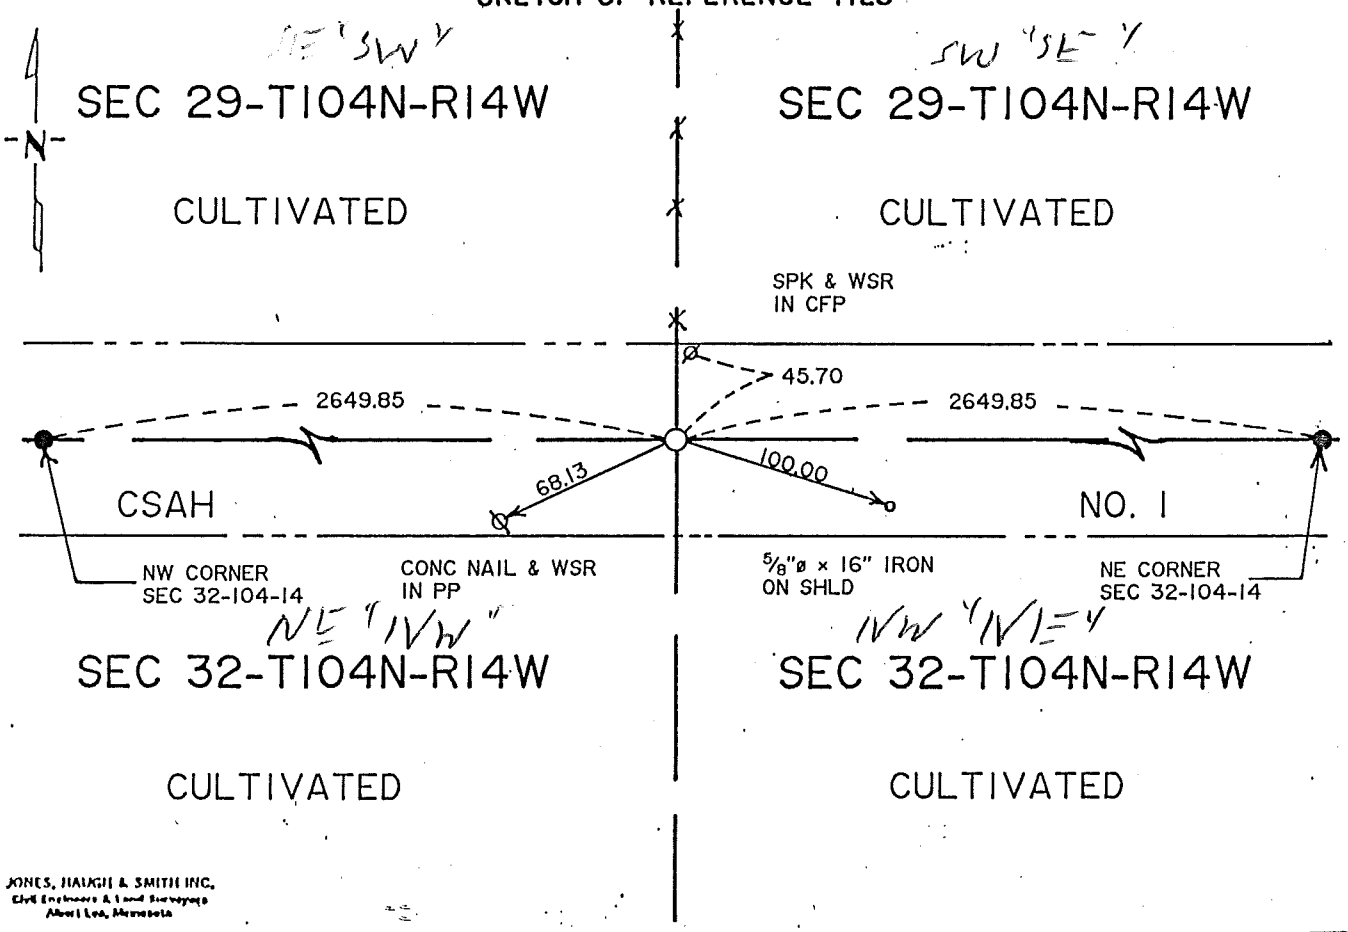

JONES, HAUGH & SMITH INC.
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

SIGNATURE _____ DATE 7-14-93

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☒ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of Mower

I hereby certify that this document was filed in the County Rec. office at 2 P.M. on the 15 day of July A.D., 1993

COUNTY RECORDER Charles Enge

By Marlene Martin, Deputy

DOCUMENT NO. 422858

BOOK 80 PAGE 327

M.H.D. FORM NO. 2105

STATEMENT OF EVIDENCE

N 1/4 corner Section 32-104-14

This corner was originally established by Deputy Surveyor John Taylor of the U.S. General Land Office in 1853. The government notes show a wood post was set with a mound of earth and trench.

The following were contacted for section corner information:
Mower County Recorder's Office
Mower County Highway Department
Zenk Engineering
Tucker Land Surveying

No information was obtained to support evidence of a perpetuation of the original public land survey corner.

1993 Jones, Haugh & Smith Inc crew under the direction of John Schulte, RLS 13807, dug with the county backhoe a 4'x4'x8' long hole on centerline of County State Aid Highway No. 1 and inline with fence running north. We found an old roadbed at a depth of three feet and continued digging into virgin soil and found no evidence of the original public land survey corner. Therefore we set a 5/8" diameter x 16" iron capped RLS 13807 at the midpoint between the northeast corner and the northwest corner of Section 32 and also on a straight line between said corners.

The monument set fits occupation lines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

N1/4 Corner of Section 33, Township 104N Range 14W, 5TH P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch:

☐ On 5-27-93 (DATE) found a NOTHING

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 6-30-93 (DATE) placed a 5/8"ø x 16" IRON CAPPED RLS NO. 13807

SKETCH OF REFERENCE TIES

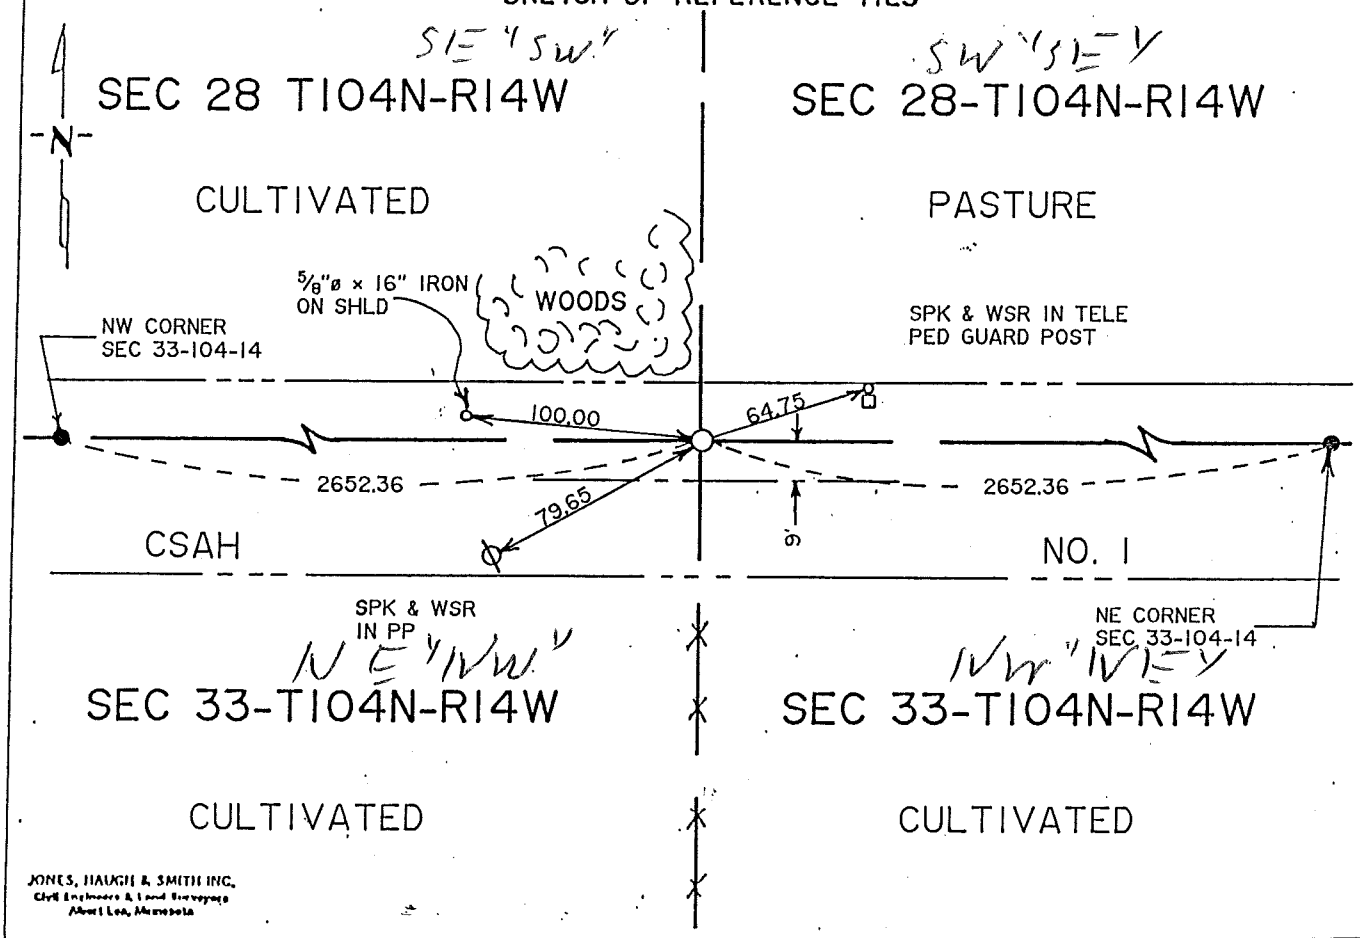

JONES, HAUGH & SMITH INC.
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

SIGNATURE _____ DATE 7-14-93

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☒ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of Mower

I hereby certify that this document was filed in the County Rec. office at 2:15 P.M. on the 15 day of July A.D., 1993

COUNTY RECORDER Charles Enger

By Marlene Martin, Deputy

DOCUMENT NO. 422860

Bk 80 Misc Pg 331

BOOK 80 PAGE 331

M.H.D. FORM NO. 2105

STATEMENT OF EVIDENCE

N 1/4 corner Section 33-104-14

This corner was originally established by Deputy Surveyor John Taylor of the U.S. General Land Office in 1853. The government notes show a wood post was set with a mound of earth and trench.

The following were contacted for section corner information:
Mower County Recorder's Office
Mower County Highway Department
Zenk Engineering
Tucker Land Surveying

No information was obtained to support evidence of a perpetuation of the original public land survey corner.

1993 Jones, Haugh & Smith Inc crew under the direction of John Schulte, RLS 13807, dug a 5'x4'x8' long hole 12 feet north of centerline of County State Aid Highway No. 1 and inline with line fence running south and east side of woods on the north side of County Road. We dug into virgin soil and continued digging down to clay and found no evidence of the original public land survey corner or perpetuation thereof. Therefore we set a 5/8" diameter x 16" iron capped RLS 13807 at the midpoint distance between the northeast and northwest corners of Section 33 and also on a straight line.

The monument set fits occupation lines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

Index No. P 90, "S" P 101, "L"

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

S1/4 Corner of Section 26, Township 104N Range 14W, 5TH P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch:

☐ On 10-21-91 (DATE) found a 5/8" ø IRON

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 10-21-91 (DATE) placed a CAST IRON MONUMENT OVER 5/8"ø IRON

SKETCH OF REFERENCE TIES

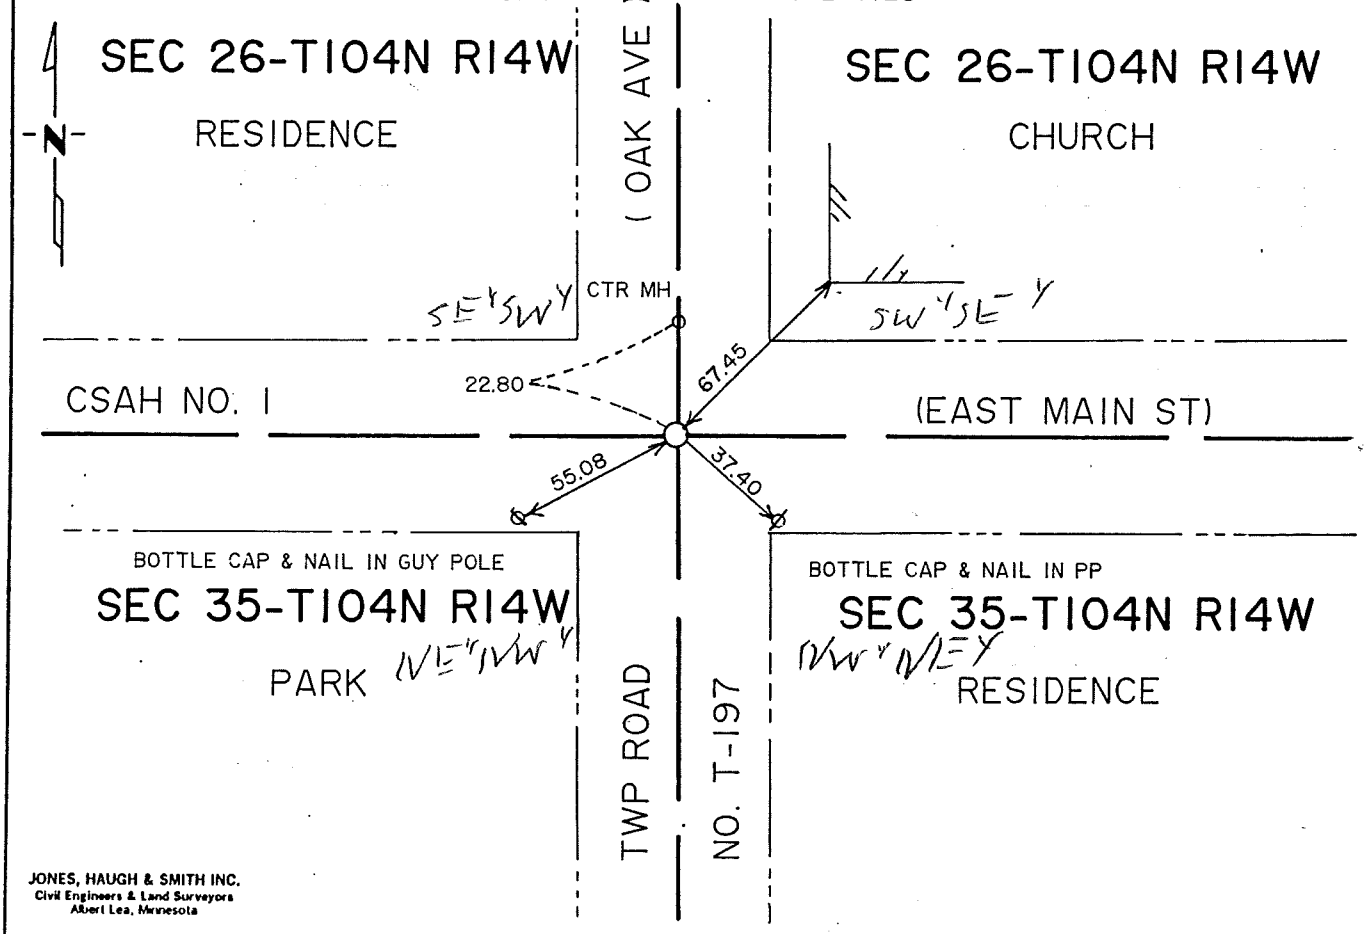

JONES, HAUGH & SMITH INC.
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

SIGNATURE 4-30-93 DATE

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☑ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of Mower

I hereby certify that this document was filed in the County Rec. office at 3 P .M. on the 4 day of May A.D. 19 93

COUNTY RECORDER Richard Conger

By Marlene Martin, Deputy

DOCUMENT NO. 420485

Bk 79 of Misc Pg 336

M.H.D. FORM NO. 2105

BOOK 79 PAGE 336

STATEMENT OF EVIDENCE

S 1/4 corner Sec. 26-104-14

This corner was originally established by Deputy Surveyor John Taylor of the U.S. General Land Survey Office in 1853. The government notes show a wood post was set with a mound of earth and trench.

The following were contacted for section corner information:
Mower County Engineering Department
Mower County Recorder
Zenk Engineering
Tucker Land Surveying

The following information was obtained to support evidence of a perpetuation of the original public land survey corner.

1885 Clausen field notes indicate a stone at the N 1/4 corner of Section 35.

1966 Book A, Mower County Highway Department, indicates 3"x20" iron ferro magnetic monument inplace set by L. Sangstone, Reg. No. 5325. The following ties were taken in 1975:
37.40 ft SE to PP (nail & bottle cap)
51.08 ft SW to guy pole (nail & bottle cap)
Dist. to NW cor Sec 35 = 2660.42 ft
Dist. to NE cor Sec 35 = 2632.48 ft
Dist. to railroad = 1385.14 ft
Dist. to U.S. #63 = 1645.24 ft

1975 Book A, Mower County Highway Department, indicates new ties taken in April 1975 by Wallace, Holland, Kastler, Schmitz & Co. The following ties were taken:
50.00 ft NW to 'X' cut in concrete sidewalk
50.00 ft NE to 'X' cut in concrete sidewalk
40.25 ft SSN to top center valve in fire hydrant

1992 Jones, Haugh & Smith crew under the direction of John H. Schulte IV, dug on centerline centerline of CSAH #1, Township Road No. T-197 and Oak Avenue. Found 5/8" diameter iron and used two ties from L. Sangstone (RLS 5325) 1966 corner certificate notes and accepted as best evidence. Left 5/8" diameter iron inplace and set public land survey cast iron monument over at road surface.

This monument fits occupation and road centerlines within the section and is accepted as best evidence of the original public land survey corner.

For electronic survey data and analysis contact the firm of Jones, Haugh & Smith Inc.

BOOK 79 PAGE 337

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

CENTER Corner of Section 26, Township 104 Range 14, 5th P.M.

STATE OF MINNESOTA, County of MOWER

At the corner location shown on the sketch


☐ On 6/3/04 (DATE) found a 3/4" IRON ROD 0.5' BELOW GRAVEL SURFACE

☒ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On _____ (DATE) placed a _____

SKETCH OF REFERENCE TIES

SEC 26–T104N–R14W

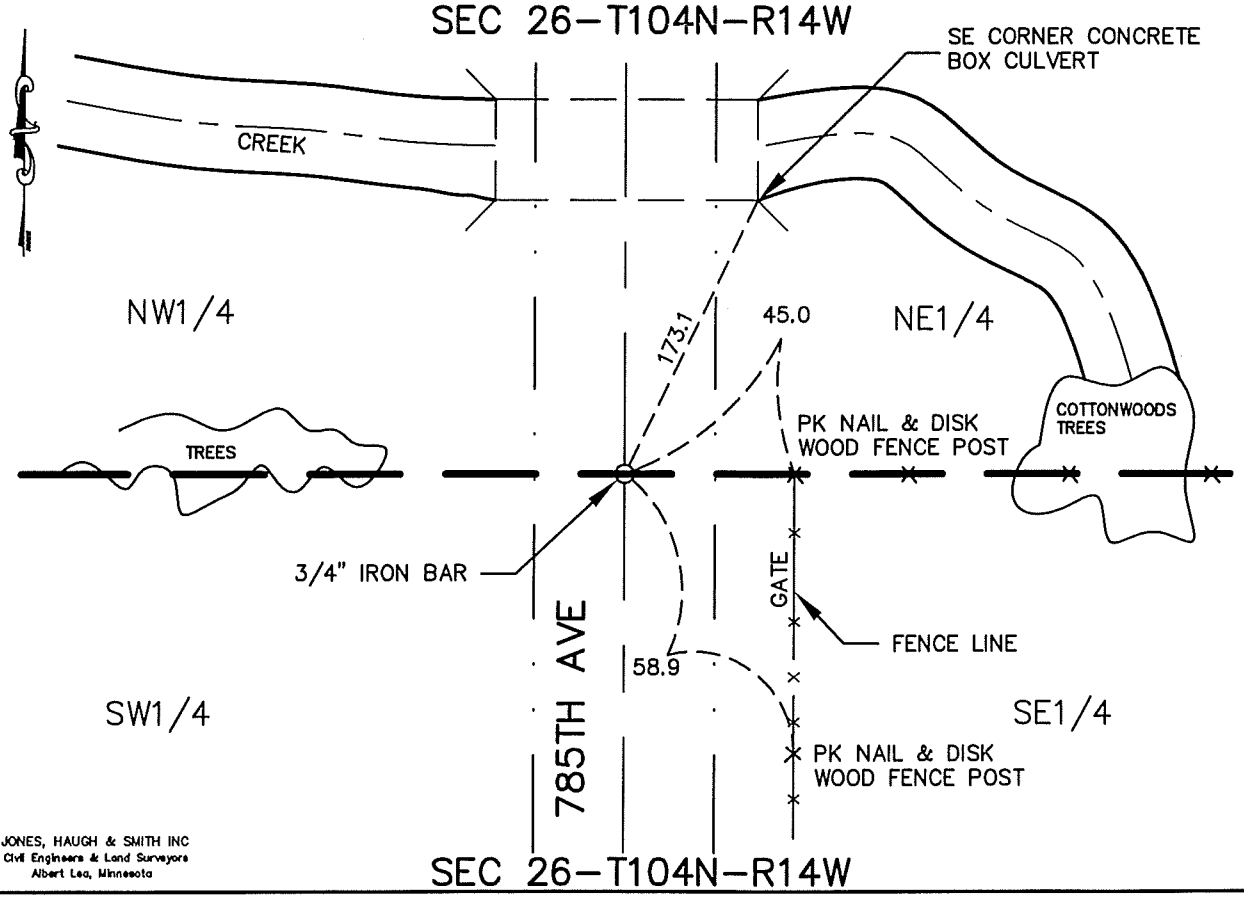

JONES, HAUGH & SMITH INC
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

SEC 26–T104N–R14W

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein were prepared by me or under my direct supervision.

_____ 6-29-04
SIGNATURE DATE

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☒ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER

County of _____

I hereby certify that this document was filed in the County Rec. office at _____ .M. on the _____ day of _____ A.D., 20___

COUNTY RECORDER _____

By _____, Deputy

DOCUMENT NO. _____

M.H.D. FORM NO. 2105

Center Section 26-T104N-R14W

The following were contacted for section corner information.

Mower County Highway Department
Mower County Recorder
Tucker Land Surveying

No record of this corner was obtained from the above mentioned offices. Corner monument was not set in original PLS Government survey.

2004 Yaggy Associates found and iron rod at this location and traversed the section using GPS and found the monument is at the intersection of straight line drawn between the ¼ section corners in accordance with PLS instructions.

The monument fits occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

For electronic survey data and analysis, contact the firm of Jones, Haugh and Smith Inc.

BOOK 25 PAGE 140 P101 TIE BOOK

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

N 1/4 Corner to Section 35 Township 104N Range 14W No. 9


STATE OF MINNESOTA,


County of Mower _____ S.S.

I hereby certify that on the 28th day of November, 19 66, that I, Leonard Sankstone, a Registered Land Surveyor, found the North quarter corner of Section 35, T104N, R14W, which was evidenced by 8"x8"x18" sandstone monument, 36" below grade, _____ and I further certify that to perpetuate the location of such corner I did, at the exact location thereof, place a permanent marker consisting of 3"x20" cast iron ferro magnetic monument. I further certify that I established 5 references or witness monuments consisting of 2 trees, 1 GP, 1 PP, 1 FP, which reference or witness monuments are located in the manner following.

51.03 ft. 18" Boxelder (N&B cap)
37.40 ft. Power Pole (N&B cap)
51.08 ft. Guy Pole (N&B cap)
NW 49.64 ft. 42" Maple (N&B cap)
NW 100.16 ft. Flag Pole (center)

(2' S of apparent ℄ E-W County Road, approx. ℄ gravel rds. N&S)
Approx. Location



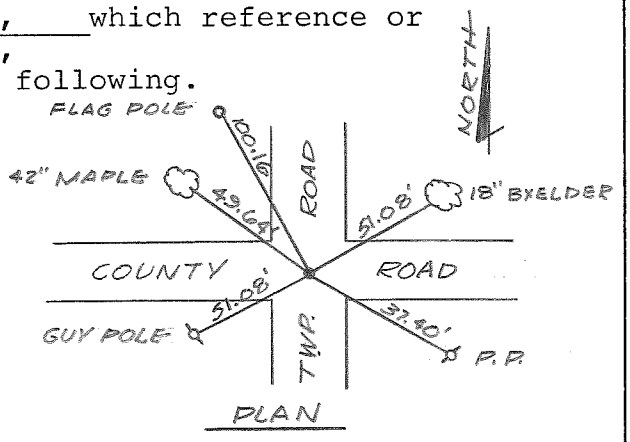

Dated at Rochester, Minnesota, this 1st day of December, 19 66.

Distance to NW cor. Sec. 35 = 2660.42
Distance to NE cor. Sec. 35 = 2632.48
Distance to Railroad = 1385.14
Distance to U.S. 63 = 1645.24

Leonard Sankstone

Leonard Sankstone

Registered Land Surveyor No. 5325

OFFICE OF THE REGISTER OF DEEDS

County of _____

I hereby certify that the within instrument was filed in this office for record on the _____ day of _____ A.D., 19____.

280011

Register of Deeds

68

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

N1/4 Corner of Section 35, Township 104N, Range 14W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch:

☒ On 10-21-91 (DATE) found a 5/8" ø iron on surface of road

☒ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☒ On 10-21-91 (DATE) placed a Cast iron monument over concrete monument

SKETCH OF REFERENCE TIES

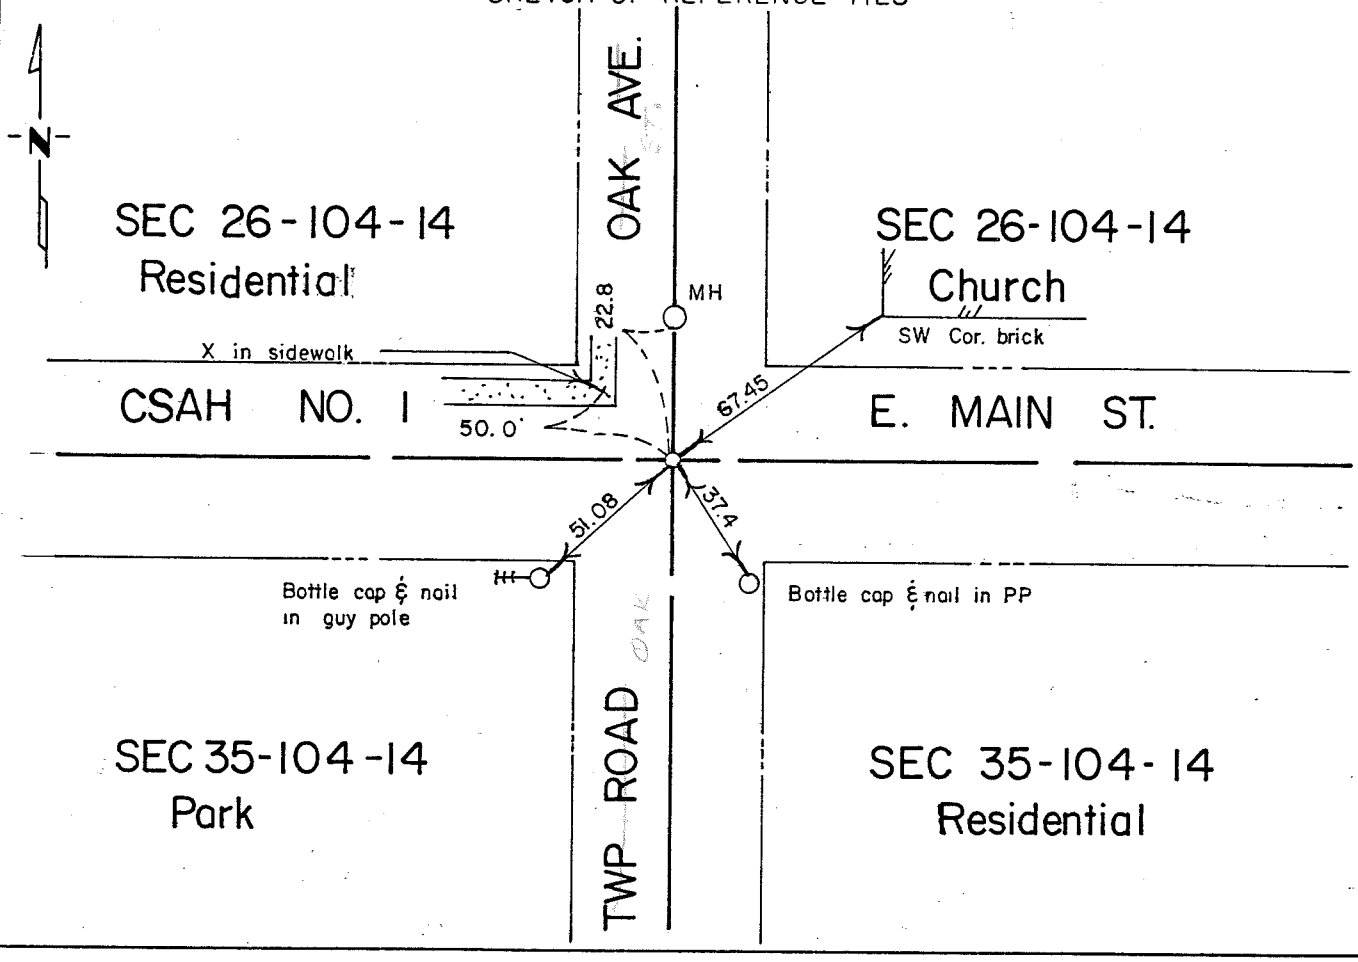

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

SIGNATURE _____ DATE 11-11-91

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☑ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER

County of _____

I hereby certify that this document was filed in the County Rec. office at _____ .M. on the _____ day of _____ A.D., 19___

COUNTY RECORDER _____

By _____, Deputy

DOCUMENT NO. _____

M.H.D. FORM NO. 2105

STATEMENT OF EVIDENCE

N 1/4 corner Section 35-104-14

This corner was originally established by Deputy Surveyor John Taylor of the U.S. General Land Office in 1853. The government notes show a wood post was set with a mound of earth and trench.

The following were contacted for section corner information:

Mower County Highway Dept	Zenk Engineering
Mower County Recorder's Office	Tucker Land Surveying

1883 Clausen, County Surveyor, notes show a stone inplace during a survey subdividing the SW 1/4.

1955 Book 'A' in the Office of the Mower County Engineer shows a magnetic monument inplace. The following ties were taken:
- 37.4' SE to nail & bottle cap in PP
- 51.08' SW to nail & bottle cap in guy pole
- 49.64' NW to nail & bottle cap in 42" Maple
- 100.16' NW to center flag pole
- NW cor Section 35 = 2660.42
- NE cor Section 35 = 2632.48
- Centerline RR = 1385.14
- Centerline U.S. Hwy 63 = 1645.25

1966 Sandstone, RLS 5325, uncovered 8"x8"x18" sandstone monument 36" below road surface and filed a Certificate of Location using the following ties. A cast iron monument was set over stone on road surface.
- 51.03' NE to nail & bottle cap in 18" Boxelder
- 37.40' SE to nail & bottle cap in PP
- 49.64' NW to nail & bottle cap in 42" Maple
- 100.16' NW to center flag pole

1975 Wallace, Holland & Associates uncovered corner and took the following ties:
- 50.0' NW to X cut in concrete sidewalk
- 50.0' NE to X cut in concrete sidewalk
- 40.25' SSW to top center valve of fire hydrant

1991 Jones, Haugh & Smith Inc crew uncovered a 5/8" diameter iron flush on centerline centerline of north-south-east-west roads and found ties used in past by area surveyors to verify position of iron to be in same location as 8"x8"x18" sandstone monument. Therefore accepted 5/8" diameter iron and set a cast iron monument over 5/8" diameter iron flush on road surface.

The monument fits occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

TIE BOOK P 90

"A"

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

NW Corner to Section 35 Township 104N Range 14W No. 8

STATE OF MINNESOTA,

County of Mower S.S.


I hereby certify that on the 25th day of November, 1966, that I, Leonard Sankstone, a Registered Land Surveyor, found the Northwest corner of Section 35, T104N, R14W, which was evidenced by 5/8" iron rod, 2" below grade,

and I further certify that to perpetuate the location of such corner I did, at the exact location thereof, place a permanent marker consisting of (left as found).

I further certify that I established 4 references or witness monuments consisting of 2 trees, 1 fence post, 1 telephone pole, which reference or witness monuments are located in the manner following.

36.65 ft. 42" Maple (N&B cap)
45.85 ft. 42" Maple (N&B cap)
36.29 ft. Corner Fence Post (N&B cap)
SW 67.56 ft. Telephone Pole (N&B cap)

(Centerline E-W bituminous County Road, fence line N and S) Approx. Location

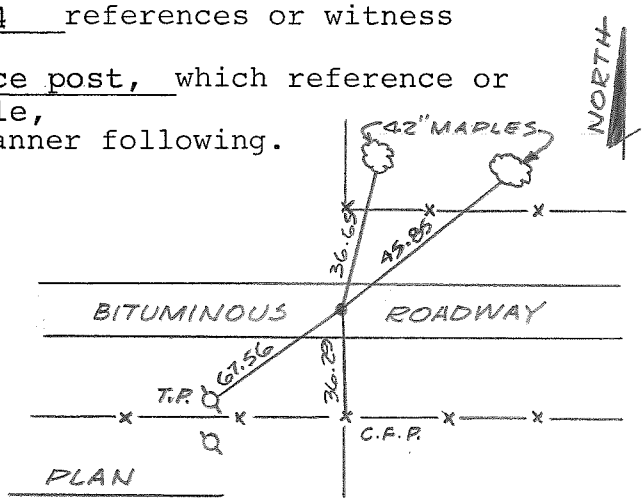

PLAN

Dated at Rochester, Minnesota, this 1st day of December, 1966.

Distance to N1/4 Sec. 35 = 2660.42
Distance to & U.S. 63 = 1015.2
Distance to Railroad = 1275.3

Leonard Sankstone

Leonard Sankstone

Registered Land Surveyor No. 5325

OFFICE OF THE REGISTER OF DEEDS

County of

I hereby certify that the within instrument was filed in this office for record on the day of A.D., 19.

280010

Register of Deeds

BOOK 25 PAGE 139

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

NE Corner of Section 35, Township 104N, Range 14W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch:

☒ On 10-21-91 (DATE) found a 1/2" ø T iron over 6" dia. concrete monument

☒ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☒ On 10-21-91 (DATE) placed a Cast iron monument over concrete monument

SKETCH OF REFERENCE TIES

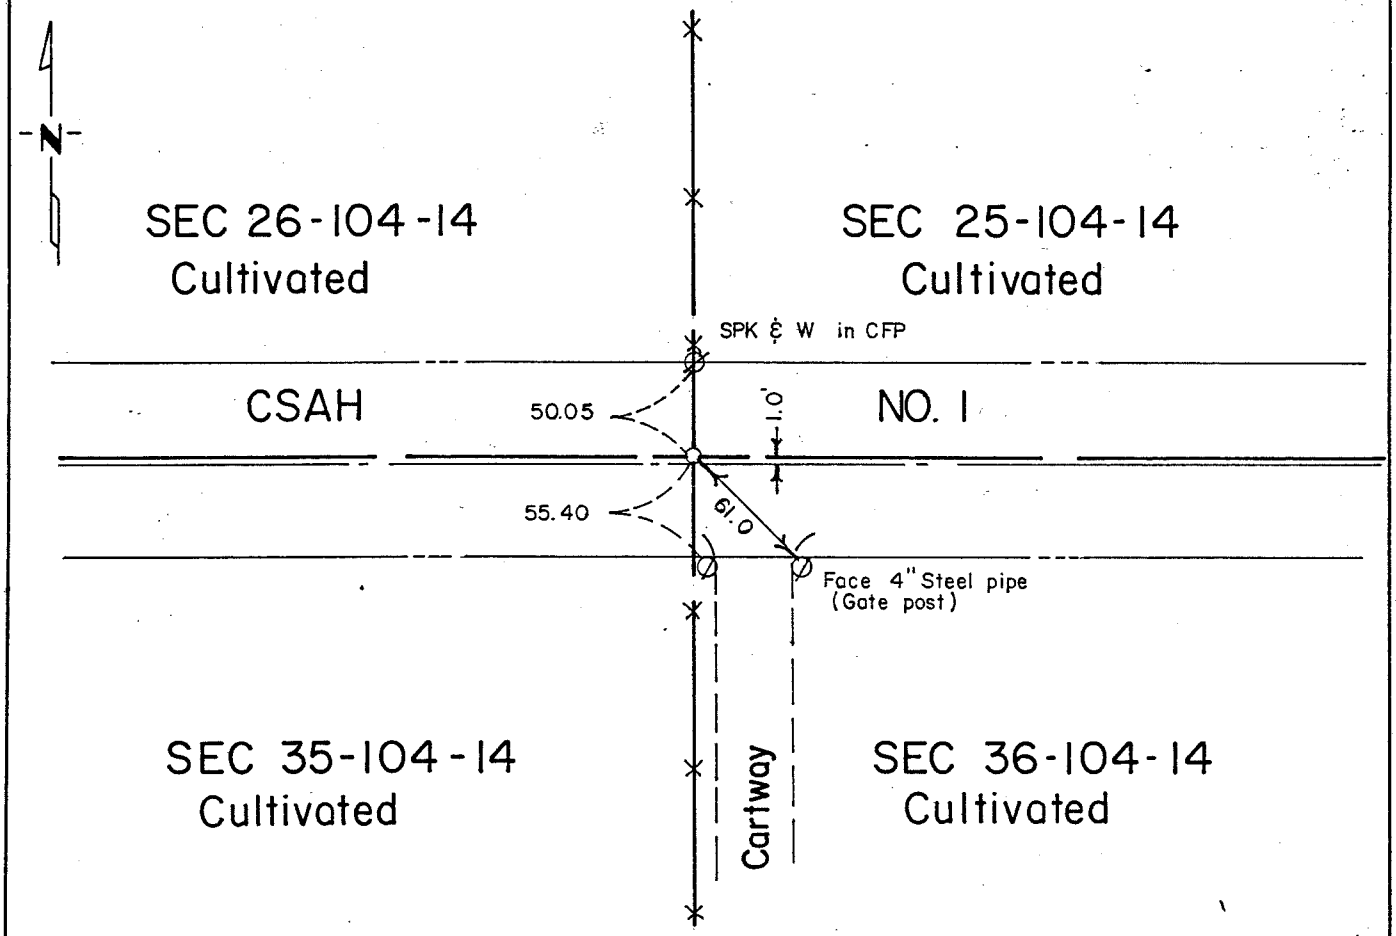

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

SIGNATURE _____ DATE 11-11-91

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☒ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER

County of _____

I hereby certify that this document was filed in the County Rec. office at _____ .M. on the ____ day of _____ A.D., 19__

COUNTY RECORDER _____

By _____, Deputy

DOCUMENT NO. _____

M.H.D. FORM NO. 2105

STATEMENT OF EVIDENCE

NE corner Section 35-104-14

This corner was originally established by Deputy Surveyor John Taylor of the U.S. General Land Office in 1853. The government notes show a wood post was set with a mound of earth and trench.

The following were contacted for section corner information:
Mower County Highway Dept
Mower County Recorder's Office
Zenk Engineering
Tucker Land Surveying

1966 Sandstone, RLS 5325, uncovered concrete monument and set "T" iron over monument on road surface. The following ties were taken:
51.84' NW to X nails in brace post
49.54' N to X nails in CFP
51.94' S to X nails in CFP
71.11' SE to X nails in RR tie

1975 Wallace, Holland & Associates uncovered "T" iron and recorded notes in Book "A" in the County Engineer's office.

1991 Jones, Haugh & Smith Inc crew dug with County backhoe on centerline east-west road in line with fence north-south and uncovered a 1/2" 'T' iron over a 6" diameter concrete monument with 3/4" diameter iron cast in center, 3 feet deep in virgin soil. Left concrete monument as found and set cast iron monument over concrete monument.

The monument fits occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

N 1/4 Corner of Section 36, Township 104N, Range 14W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch:

☒ On 10-21-91 (DATE) found a NO EVIDENCE

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☒ On 10-21-91 (DATE) placed a Cast iron monument at midpoint on straight line between

SKETCH OF REFERENCE TIES

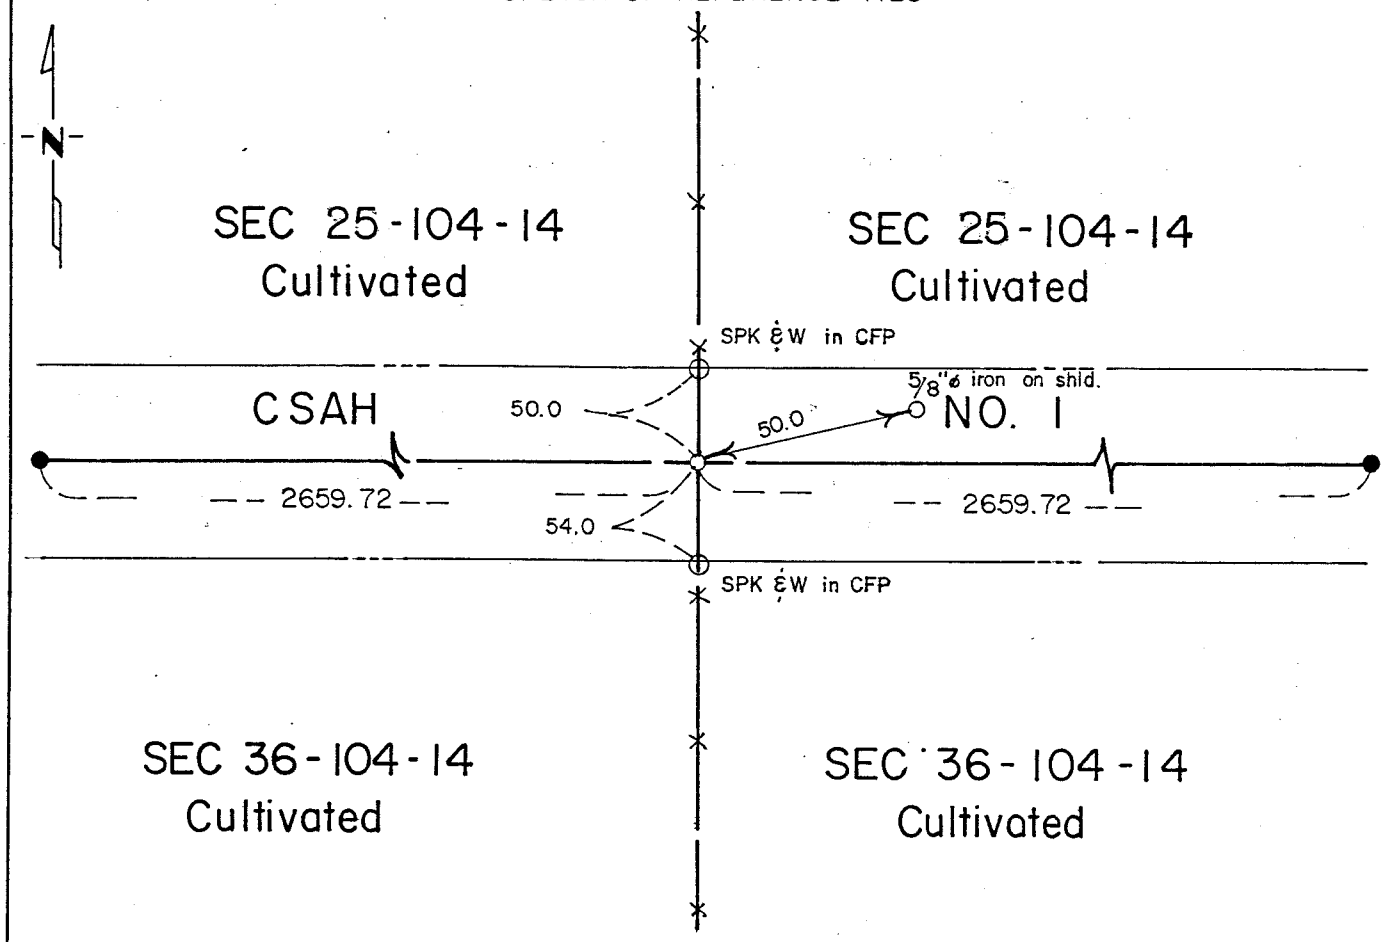

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

SIGNATURE _____ DATE 12-4-91

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☑ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER

County of _____

I hereby certify that this document was filed in the County Rec. office at _____ .M. on the _____ day of _____ A.D., 19___

COUNTY RECORDER _____

By _____, Deputy

DOCUMENT NO. _____

M.H.D. FORM NO. 2105

STATEMENT OF EVIDENCE

N 1/4 corner Section 36-104-14

This corner was originally established by Deputy Surveyor John Taylor of the U.S. General Land Office in 1853. The government notes show a wood post was set with a mound of earth and trench.

The following were contacted for section corner information:
Mower County Highway Dept
Mower County Recorder's Office
Zenk Engineering
Tucker Land Surveying

1883 Clausen, County Surveyor, shows a wood post found at this location and his chaining notes show 40.24 chains = 2655.84 feet west and east of 1/4 corner.

1991 Jones, Haugh & Smith Inc crew dug on centerline east-west road in line with fence north-south at which point is at the midpoint of the section and found no evidence of public land survey corner or a perpetuation thereof. Therefore set cast iron monument on straight line between section corners at the midpoint.

The monument fits occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

NE Corner of Section 36, Township 104N, Range 14W, 5TH P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch:

☒ On 3-11-91 (DATE) found a concrete nail & washer on bituminous surface.

☒ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☒ On 3-11-91 (DATE) placed a CAST IRON MONUMENT AT ROAD SURFACE OVER CONCRETE MONUMENT FOUND.

SKETCH OF REFERENCE TIES

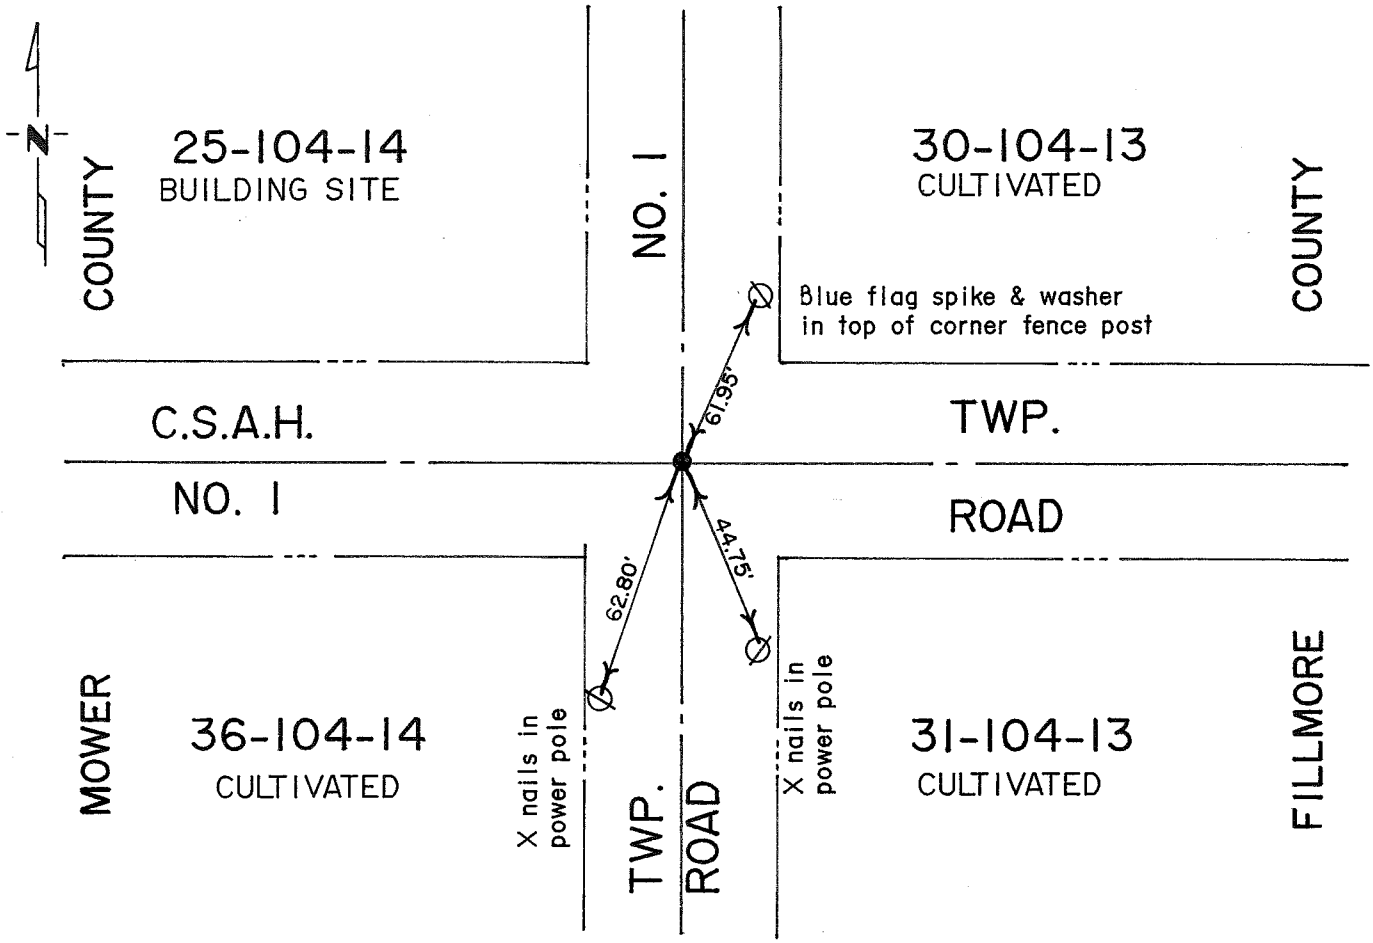

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

SIGNATURE _____ DATE 4-3-91

Registration No. 13807

☒ Land Surveyor, ☐ Professional Engineer

☐ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER

County of _____

I hereby certify that this document was filed in the County Rec. office at _____ .M. on the _____ day of _____ A.D., 19 ___

COUNTY RECORDER _____

By _____, Deputy

DOCUMENT NO. _____

M.H.D. FORM NO. 2105

STATEMENT OF EVIDENCE

NE cor Sec 36-104-14

1853 John Ball, Deputy Surveyor set a post for corner during the original public land survey.

1955 Mower County Engineer of Surveyor uncovered a concrete monument and ties were taken and recorded in 'Book A' in the Office of the Mower County Engineer.

1980 Fillmore County Surveyor found a concrete monument at the corner. Mower County has set similar monuments along their east line. This concrete monument is hereby accepted as the section corner.

1991 Jones, Haugh & Smith Inc personnel found a concrete nail and washer flush on bituminous road. All ties taken by Fillmore County Surveyor checked. Left monument as found.

The monument found fits occupation and road centerlines and is accepted as best evidence of a perpetuation of the original public land survey corner. Placed a cast iron monument at road surface over concrete monument found.

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

NE Corner of Section 36, Township 104N, Range 14W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch:

☒ On 10-21-91 (DATE) found a 1/2" T iron over 6" dia. concrete monument

☒ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☒ On 10-21-91 (DATE) placed a Cast iron monument over concrete monument

SKETCH OF REFERENCE TIES

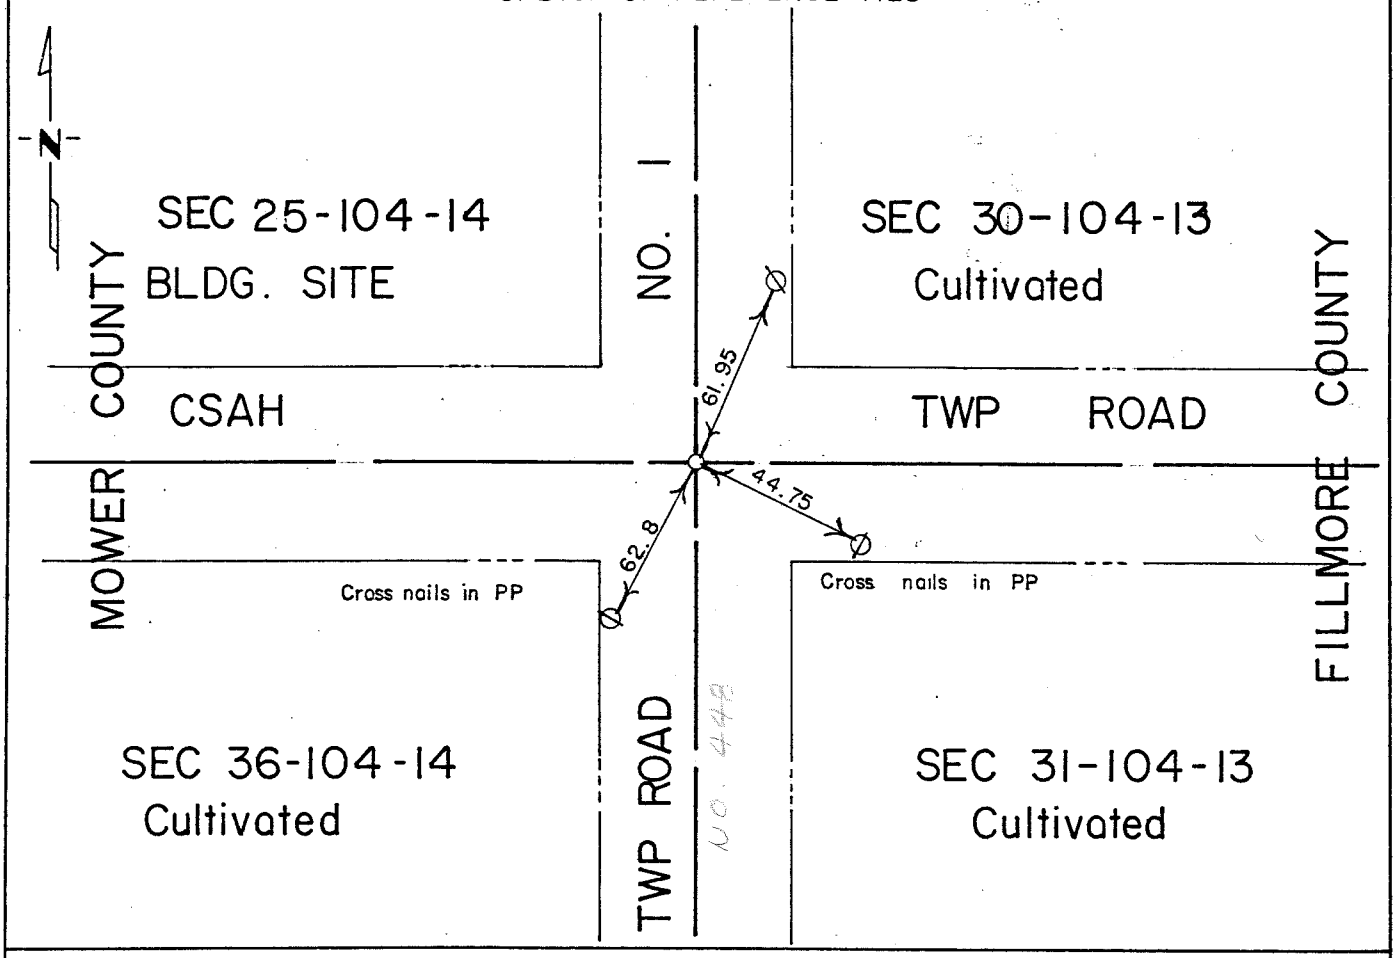

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

SIGNATURE _____ DATE 11-14-91

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☑ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER

County of _____

I hereby certify that this document was filed in the County Rec. office at _____ .M. on the ____ day of _____ A.D., 19__

COUNTY RECORDER _____

By _____, Deputy

DOCUMENT NO. _____

M.H.D. FORM NO. 2105

STATEMENT OF EVIDENCE

NE corner Section 36-104-14

This corner was originally established by Deputy Surveyor John Ball of the U.S. General Land Office in 1853. The government notes show a wood post was set with a mound of earth and trench.

The following were contacted for section corner information:
Mower County Highway Dept
Mower County Recorder's Office
Zenk Engineering
Tucker Land Surveying

1883 Clausen, County Surveyor, uncovered a wood post during the subdivision of the SW 1/4.

1955 Book 'A' in the Office of the Mower County Engineer shows a monument found. The following ties were taken:
54.5' NE to TP
60.2' NW to 6" Pine
63.9' SE to drive post
53.4' SW to second fence post

1966 Sandstone, RLS 5325, uncovered a concrete monument with 2"x2" hub 2 feet below road surface. A "T" iron was set over monument. The following ties were taken:
68.85' NE to X nails in TP
44.75' SE to X nails in PP
62.80' SSW to X nails in PP
110.15' SW to X nails in CFP

1975 Wallace, Holland & Associates uncovered "T" iron and made notes in Book "A" in the County Engineers Office.

1991 Jones, Haugh & Smith Inc crew dug with County backhoe on centerline centerline of north-east-west-south road and uncovered a 1/2" 'T' iron over a 6" diameter concrete monument with a 3/4" diameter iron cast in center 3 feet below road surface in virgin soil. Left concrete monument as found and set a cast iron monument over concrete monument on road surface.

The monument fits occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.