Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

N 1/4 Corner of Section 22, Township 104N, Range 15W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch:

☒ On 10/18/1991 (DATE) found a POINTED FIELD STONE

☒ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☒ On 10/18/1991 (DATE) placed a CAST IRON MONUMENT

SKETCH OF REFERENCE TIES

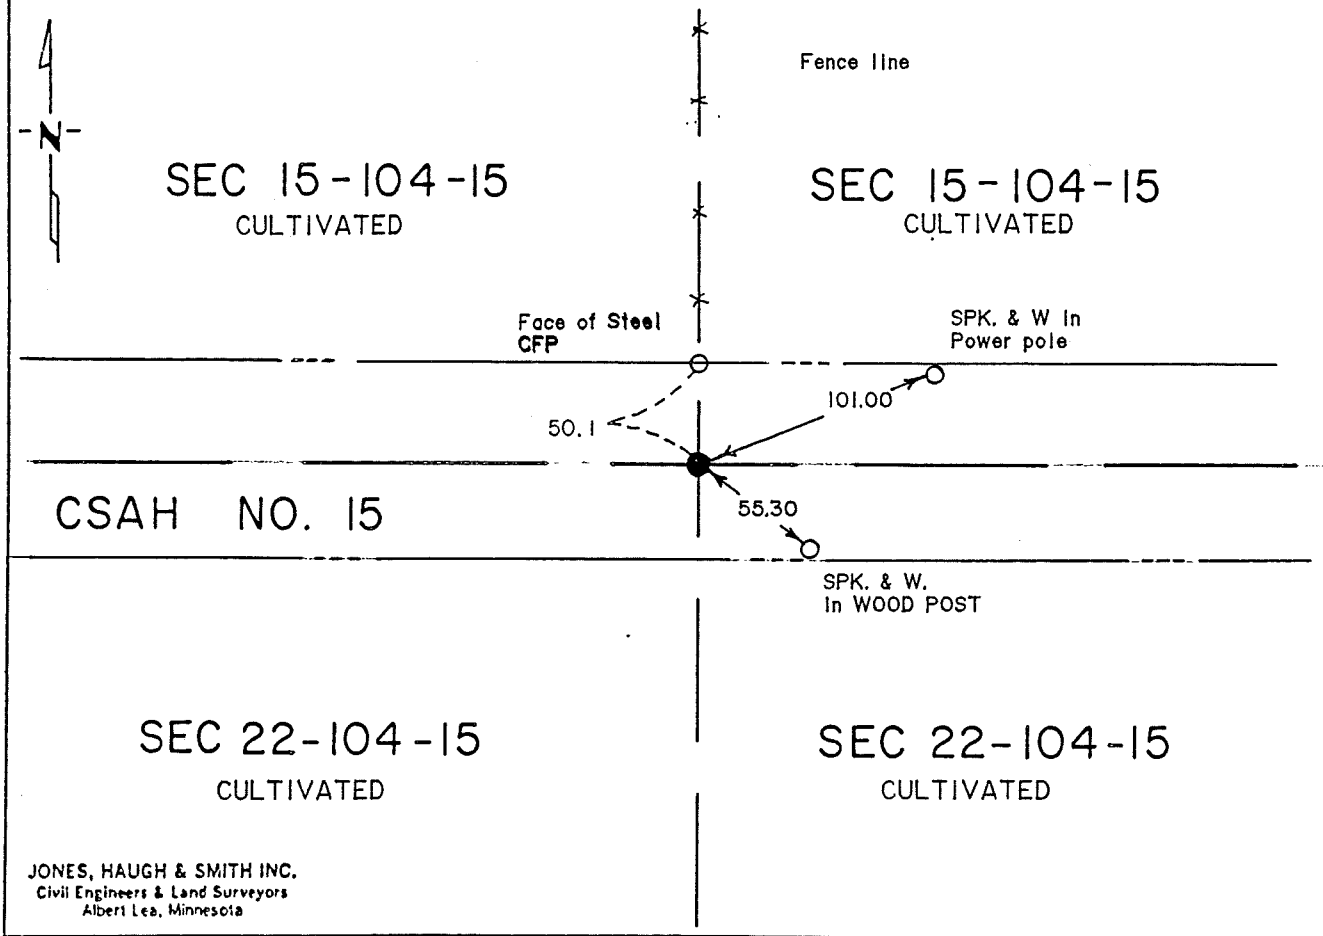

JONES, HAUGH & SMITH INC.
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

SIGNATURE _____ DATE 12-6-91

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☒ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of _____

I hereby certify that this document was filed in the County Rec. office at _____ .M. on the _____ day of _____ A.D., 19__

COUNTY RECORDER _____

By _____, Deputy

DOCUMENT NO. _____

M.H.D. FORM NO. 2105

STATEMENT OF EVIDENCE

N 1/4 corner Section 22-104-15

This corner was originally established by Deputy Surveyor John Quigley of the U.S. General Land Office in 1854. The government notes show a wood post was set with a mound of earth and trench.

The following were contacted for section corner information:
Mower County Recorder's Office
Mower County Highway Department
Zenk Engineering
Tucker Land Surveying

1930 Mower County Grading Plan shows a stone monument at Sta 159+38.4 and the following ties were taken:

Hub 50' NE	Hub 50' SE
Hub 50' SW	Hub 50' NW

1948 Mower County Grading Plan shows a stone monument at 1/4 corner and the following ties were taken:
57.5' SW to TP
77.5' N to third st. fence post
52.0' SSW to CFP

1991 Jones, Haugh & Smith Inc crew under the direction of John Schulte, County Surveyor, dug with the County backhoe on the centerline of east-west roads in line with fence north and uncovered a 6"x8" pointed field stone 3 feet deep in virgin soil. Placed a 5/8" diameter iron on east side of stone and set a cast iron monument on road surface over stone.

The monument found fits occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

For electronic survey data & analysis contact the firm of Jones, Haugh & Smith Inc.