TIE BOOK P. 89

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

Northeast Corner of Section 31, Township 104N, Range 15W, 5th P.M. STATE OF MINNESOTA, County of Mower


At the corner location shown on the sketch:

☒ On Dec. 5, 1980 found a steel rod in concrete monument

☒ left monument as found, ☐ lowered monument, ☐ removed monument (expl.)

☒ On Dec. 5, 1980 placed a cast iron Monument over concrete monument

SKETCH OF REFERENCE TIES

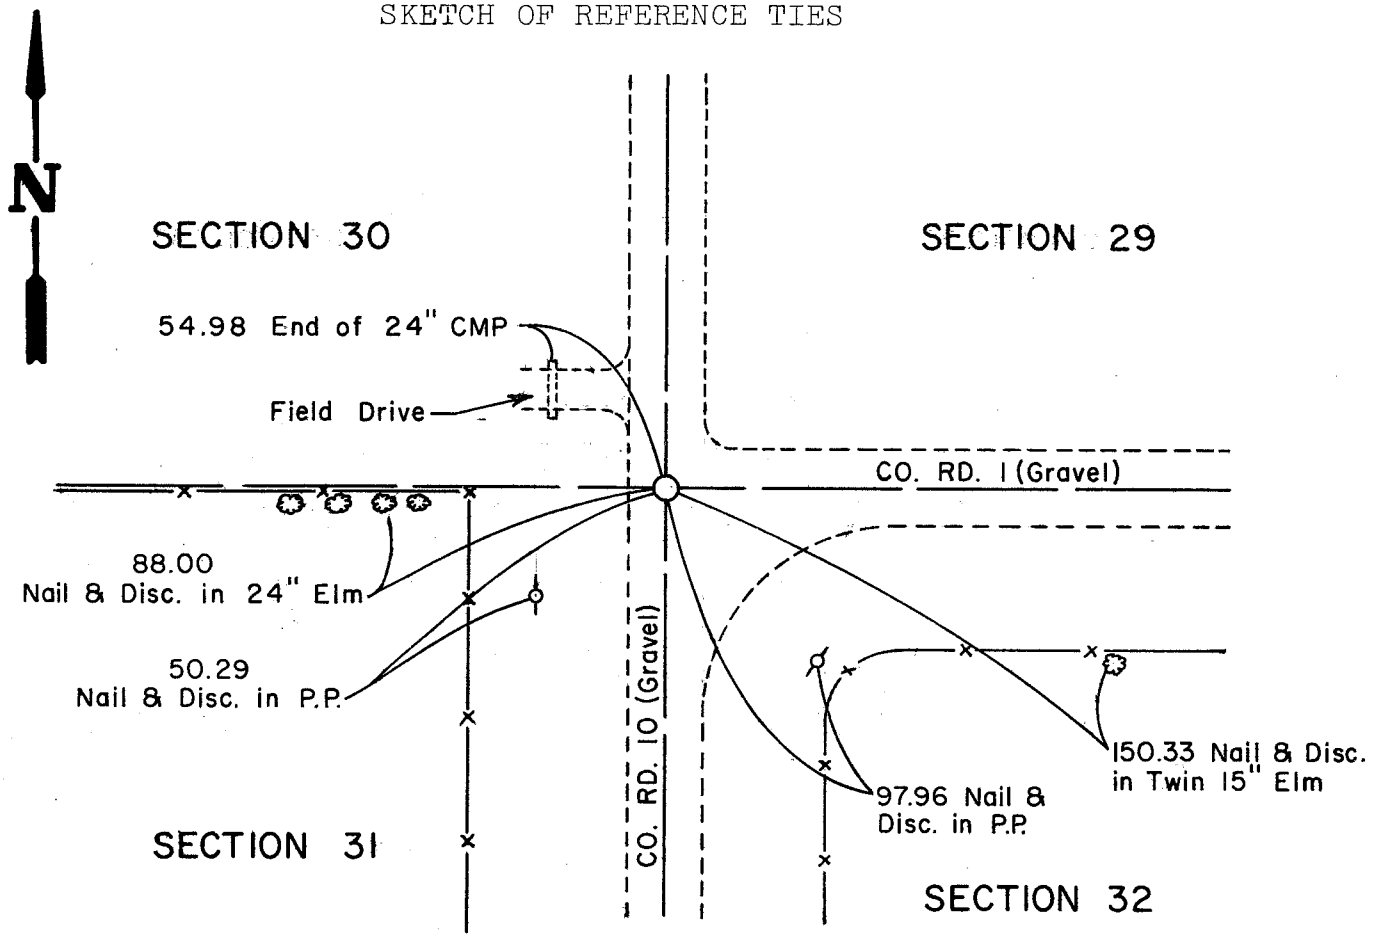

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

Ronald J. Olson — Signature
12-16-80 — Date

Registration No. 11009
☒ Land Surveyor, ☒ Prof. Engineer
☐ County Surveyor, ☐ County Engr.

OFFICE OF THE COUNTY RECORDER
County of _____

I hereby certify that this document was filed in the County Recorders office at _____.M. on the ___ day of _____ A.D., 19____.

County Recorder _____

By _____, Deputy

DOCUMENT NO. _____

STATEMENT OF EVIDENCE:

NORTHEAST CORNER OF SECTION 31, TOWNSHIP 104 NORTH, RANGE 15 WEST, 5th P.M.

July, 1853 — John Quigley, Deputy Surveyor, set the corner during the original Public Land Survey.

Dexter Township, Mower County, Minnesota constructed Township roads North-South and East in the vicinity of the corner.

1930's-1940's — Mower County set concrete monuments at some corners in the county.

1952 — Mower County obtained control to the North-South road and constructed a county road. An iron pin in a concrete monument was found at the corner.

December 5, 1980

Ronald J. Olson, Registered Land Surveyor, searched the area with a magnetic locater. An excavation was made with the cooperation of the County Engineer and an iron rod in concrete was found 4 feet below the surface. The distance to the Southeast Corner of Section 31 was measured electronically. The measurement agrees within 1 foot of the distance measured in 1952.

The concrete monument has been perpetuated as the corner for over 30 years and is accepted as marking the corner of the Public Land Survey.

For additional details, contact Zenk Engineering, Inc., Albert Lea, Minnesota.