Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

S 1/4 Corner of Section 25, Township T104N Range R15W, ____ P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch:

☐ On 8-16-94 (DATE) found a NO EVIDENCE

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 8-16-94 (DATE) placed a 5/8"ø IRON WITH CAST IRON MON. AT SPLIT BETWEEN SE & SW COR. 4" BELOW ROAD SURFACE.

SKETCH OF REFERENCE TIES

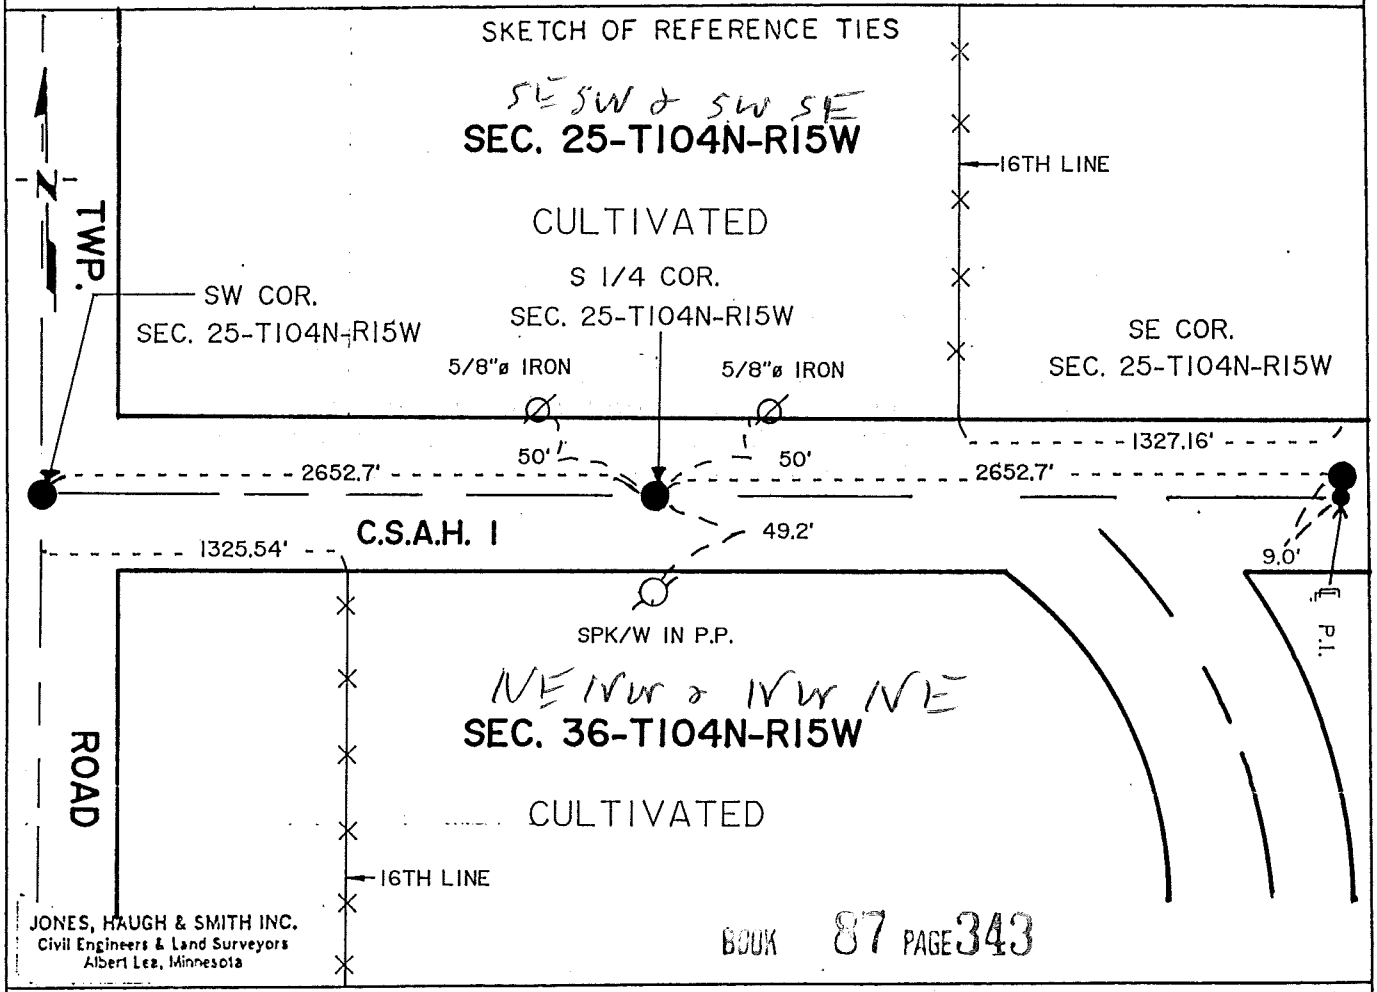

JONES, HAUGH & SMITH INC.
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

BOOK 87 PAGE 343

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

SIGNATURE _____ DATE 6-12-95

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☐ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of Mower

I hereby certify that this document was filed in the County Rec. office at 11 A .M. on the 19 day of June A.D., 19 95

COUNTY RECORDER Charles Engen

By Susan M. Davis, Deputy

DOCUMENT NO. 437349

Book 87 Misc Page 343

MLP FORM NO. 2105

S 1/4 Cor SEC 25-104-15

This corner was originally established by Deputy Surveyor John Quigley of the U.S. General Land Office in 1854. The government notes show a wood post was set with a mound of earth and trench.

The following were contacted for section corner information.

Mower County Highway Dept.
Mower County Recorder
Zenk Engineering
Tucker Land Surveying

No record of this corner was obtained from the above mentioned offices.

1994 Jones, Haugh and Smith crew, under direction of John Schulte, Mower County Surveyor, dug with county backhoe on CL Twp. road and at split of the mile between the SE and SW corners. The mile measured to be 5305.40, making the split 2652.70. Excavated a 6' X 12' X 4' deep hole to virgin soil. No evidence was found of the corner. Placed CIM at split between SE and SW corners, 4" below the road surface.

The monument fit occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

For electronic survey data and analysis, contact the firm of Jones, Haugh and Smith Inc.