Index No. _____

# CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

NW Corner of Section 31, Township 104N Range 14W, 5TH P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch:

☐ On 5-25-93 (DATE) found a NOTHING

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 5-25-93 (DATE) placed a CAST IRON MONUMENT

SKETCH OF REFERENCE TIES

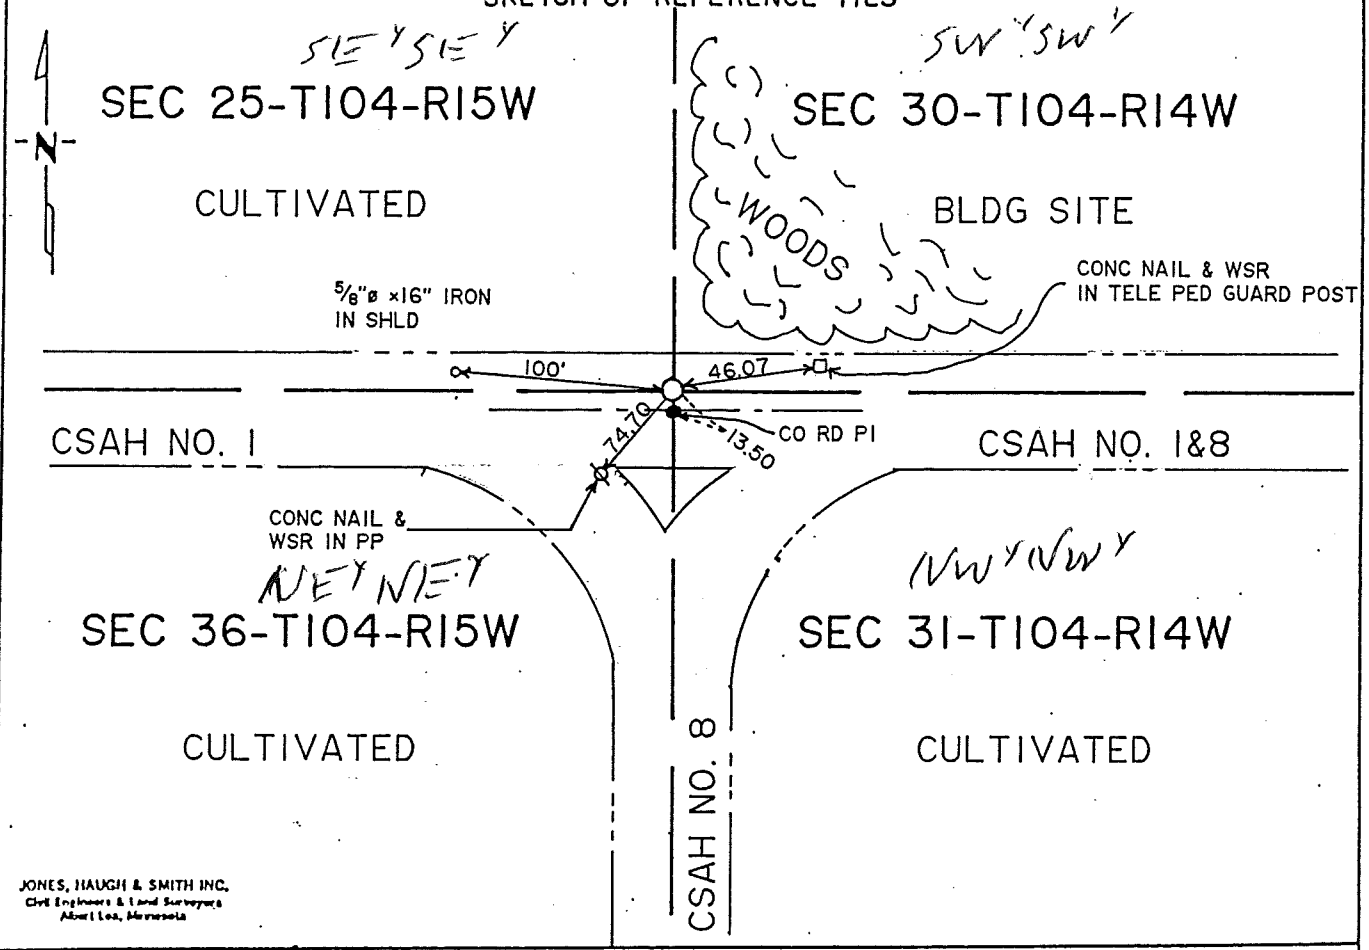


JONES, HAUGH & SMITH INC.
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

SIGNATURE _____ DATE 6-11-93

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☒ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of Mower

I hereby certify that this document was filed in the County Rec. office at 10 A.M. on the 21 day of June A.D., 19 93

COUNTY RECORDER Orlando Enger

By Marlene Martin, Deputy

DOCUMENT NO. 421595 Bk 79 Misc Pg. 594

M.H.D. FORM NO. 2105 BOOK 79 PAGE 594

STATEMENT OF EVIDENCE

NW cor Sec 31-104-14

This corner was originally established by Deputy Surveyor John Ball of the U.S. General Land Office in 1853. The government notes show a wood post and small stones were set with a mound of earth and trench.

The following were contacted for section corner information:
Mower County Highway Department
Mower County Recorder
Zenk Engineering
Tucker Land Surveying

The following information was obtained to support evidence of the perpetuation of the original public land survey corner.

1889 Clausen, Mower County Surveyors, indicates a government post at this corner.

1945 Mower County Highway Dept Book 1 indicates a concrete monument inplace at this corner.

1945 Mower County Road Plans indicate a concrete monument inplace 13.5 feet north of County State Aid Highway No. 8 curve PI.

1993 Jones, Haugh & Smith Inc crew under the direction of John H. Schulte IV, RLS 13807, dug a 4'x3'x10' hole 13.5 feet north of iron monument found at County Road PI and also in line with north-south centerline of County State Aid Highway No. 8 and found no evidence of concrete monument or the original public land survey corner. Therefore we set a cast iron monument near the road surface using a distance of 13.5 feet north of the County Road PI and in line with the centerline of north-south County State Aid Highway No. 8 according to County State Aid Highway No. 8 Road Plans.

The monument set fits occupation lines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

BOOK 79 PAGE 595

Revised

Index No. _____

# CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

NW Corner of Section 31, Township 104N Range 14W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch

☐ On 05/25/1993 (DATE) found a –

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 05/25/1993 (DATE) placed a CAST IRON MONUMENT.

SKETCH OF REFERENCE TIES

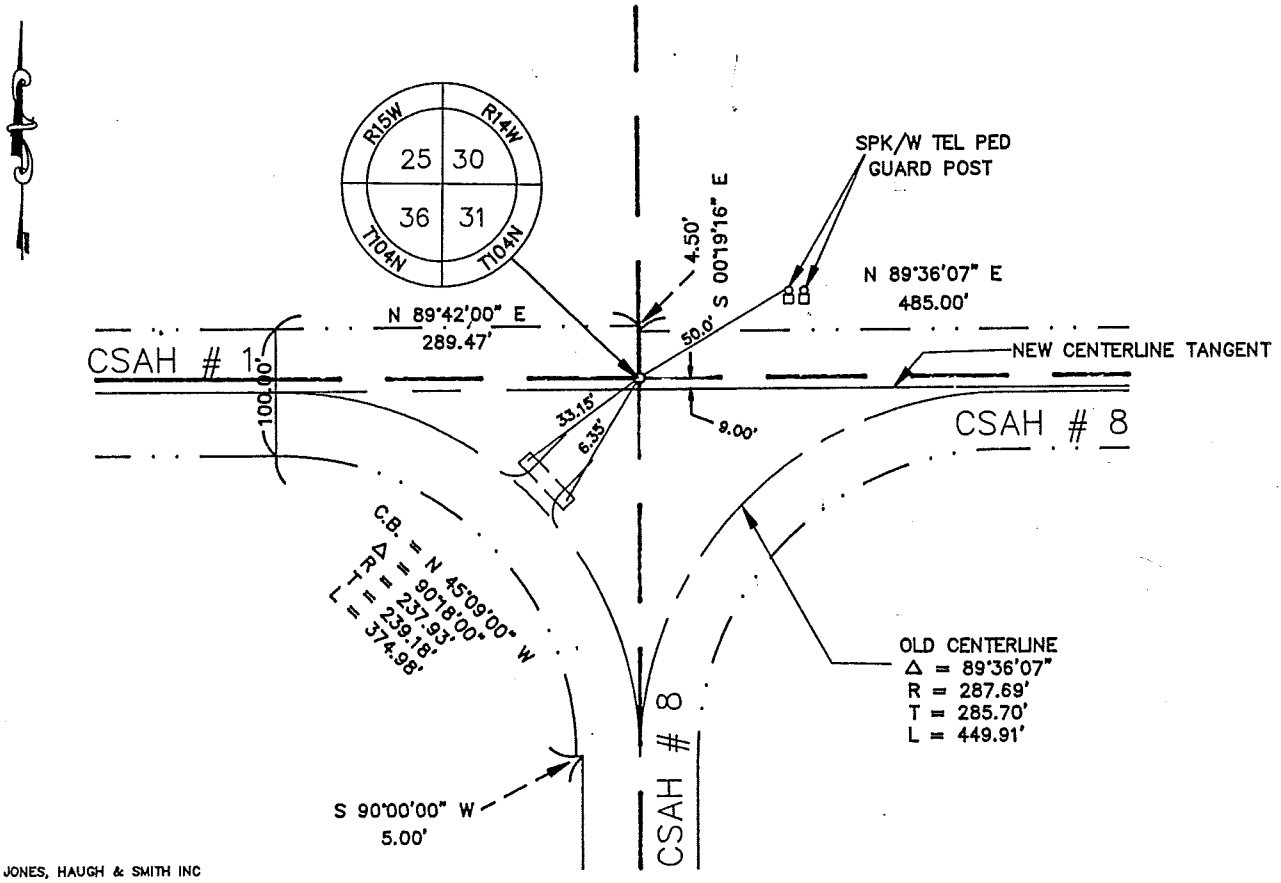


JONES, HAUGH & SMITH INC
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein were prepared by me or under my direct supervision.

_____ _____
SIGNATURE DATE

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☐ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of _____

I hereby certify that this document was filed in the County Rec. office at _____ .M. on the _____ day of _____ A.D., 19___

COUNTY RECORDER _____

By _____ Deputy

DOCUMENT NO. _____

M.H.D. FORM NO. 2105

STATEMENT OF EVIDENCE

NW cor Sec 31-104-14

This corner was originally established by Deputy Surveyor John Ball of the U.S. General Land Office in 1853. The government notes show a wood post and small stones were set with a mound of earth and trench.

The following were contacted for section corner information:
Mower County Highway Department
Mower County Recorder
Zenk Engineering
Tucker Land Surveying

The following information was obtained to support evidence of the perpetuation of the original public land survey corner.

1889 Clausen, Mower County Surveyors, indicates a government post at this corner.

1945 Mower County Highway Dept Book 1 indicates a concrete monument inplace at this corner.

1945 Mower County Road Plans indicate a concrete monument inplace 13.5 feet north of County State Aid Highway No. 8 curve PI.

1993 Jones, Haugh & Smith Inc crew under the direction of John H. Schulte IV, RLS 13807, dug a 4'x3'x10' hole 13.5 feet north of iron monument found at County Road PI and also in line with north-south centerline of County State Aid Highway No. 8 and found no evidence of concrete monument or the original public land survey corner. Therefore we set a cast iron monument near the road surface using a distance of 13.5 feet north of the County Road PI and in line with the centerline of north-south County State Aid Highway No. 8 according to County State Aid Highway No. 8 Road Plans.

The monument set fits occupation lines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.