Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

SE Corner of Section 27, Township 104N, Range 16W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch:

☐ On 7-18-91 (DATE) found a 4"x 6" square limestone in a nest of clay bricks 5' deep in virgin soil.

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 7-18-91 (DATE) placed a 5/8"Ø iron on West side of stone and set a cast iron monument over stone found.

SKETCH OF REFERENCE TIES

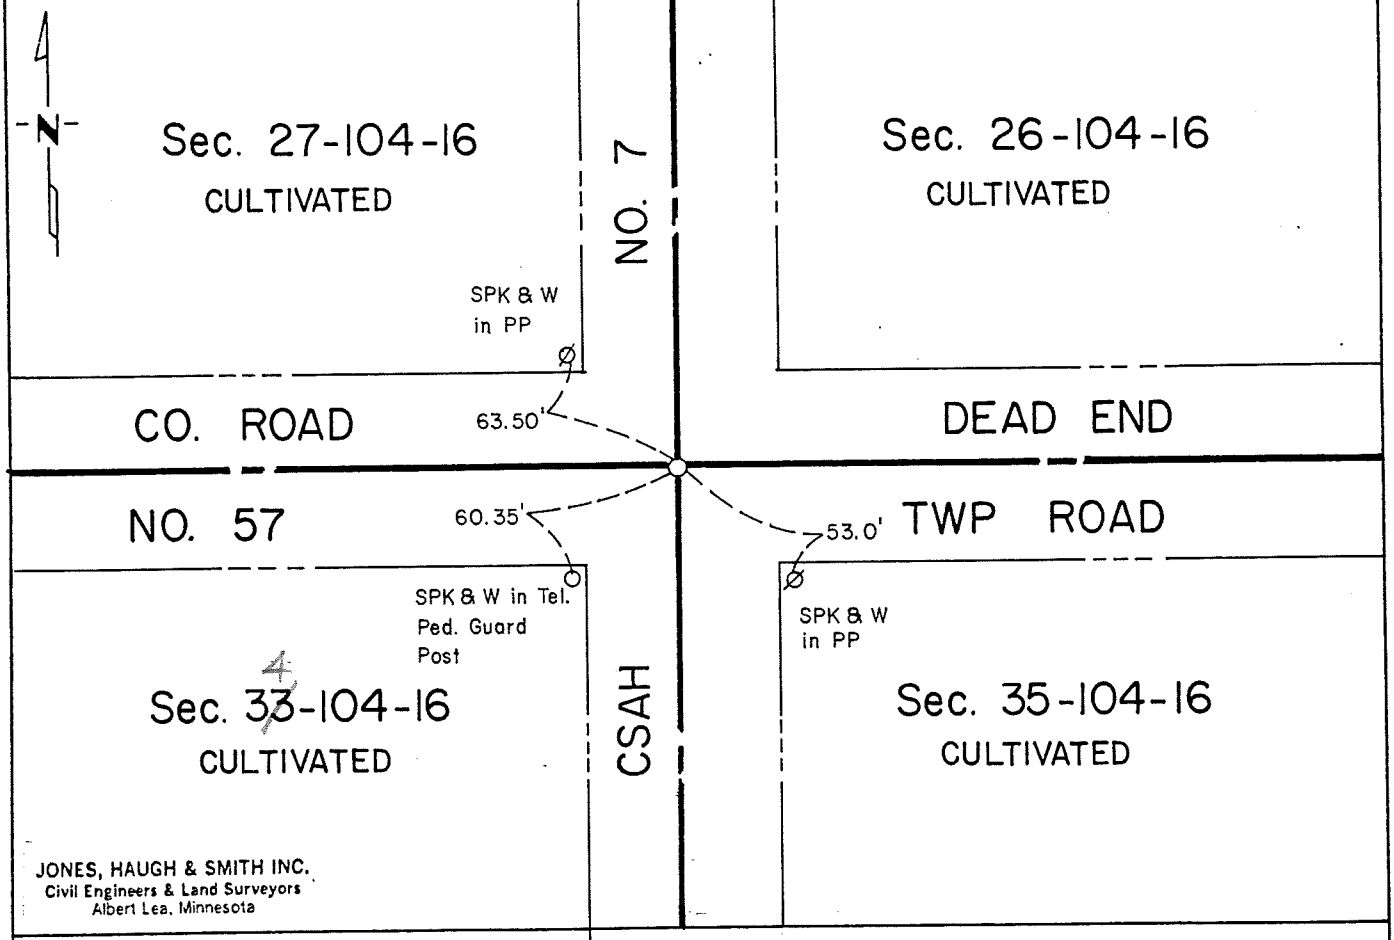

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

_____ SIGNATURE 8-12-91 DATE

Registration No. 13807

☒ Land Surveyor, ☐ Professional Engineer

☐ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER

County of _____

I hereby certify that this document was filed in the County Rec. office at _____ .M. on the _____ day of _____ A.D., 19__

COUNTY RECORDER _____

By _____, Deputy

DOCUMENT NO. _____

M.H.D. FORM NO. 2105

STATEMENT OF EVIDENCE

SE corner Sec 27-104-16

This corner was originally established by Deputy Surveyor John Fitzpatrick of the U.S. General Land Office in 1853. The government notes show a wood post and a stone was set with a mound of earth and trench.

The following were contacted for section corner information:
Mower County Highway Dept
Mower County Recorder
Zenk Engineering
Tucker Land Surveying

The following information was obtained to support evidence of a perpetuation of the original public land survey corner.

1890 Clausen, Mower County Surveyor from 1880-1892 notes show a government post in place.

Book A of the Mower County Engineering Department show a monument in place. The following ties were taken:
38.8' NE to mail box
26.9' NW to north end culvert
23.4' SW to south end culvert
34.8' SE to telephone pole
29.4' E to corner post

1991 Jones, Haugh & Smith Inc crew under the direction of John H. Schulte IV, RLS 13807, dug with the County backhoe on centerline centerline of the north-south-east-west roads for 1992 County Road No. 57 Grading Project. Uncovered a sq 4"x6" limestone in a nest of clay bricks 5 feet deep in virgin soil. Placed a 5/8" iron on the west side of stone and set a cast iron monument over stone found on road surface.

The monument fit occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.