Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

NE Corner of Section 2, Township 104N Range 17W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch

☐ On 11/04/1993 (DATE) found a 3/4"X16" PIPE CAPPED RLS #14888 12"X20" LONG FIELD STONE WITH A 3/4"X18" LONG ROD

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 11/04/1993 (DATE) placed a CAPPED 5/8" IRON

SKETCH OF REFERENCE TIES

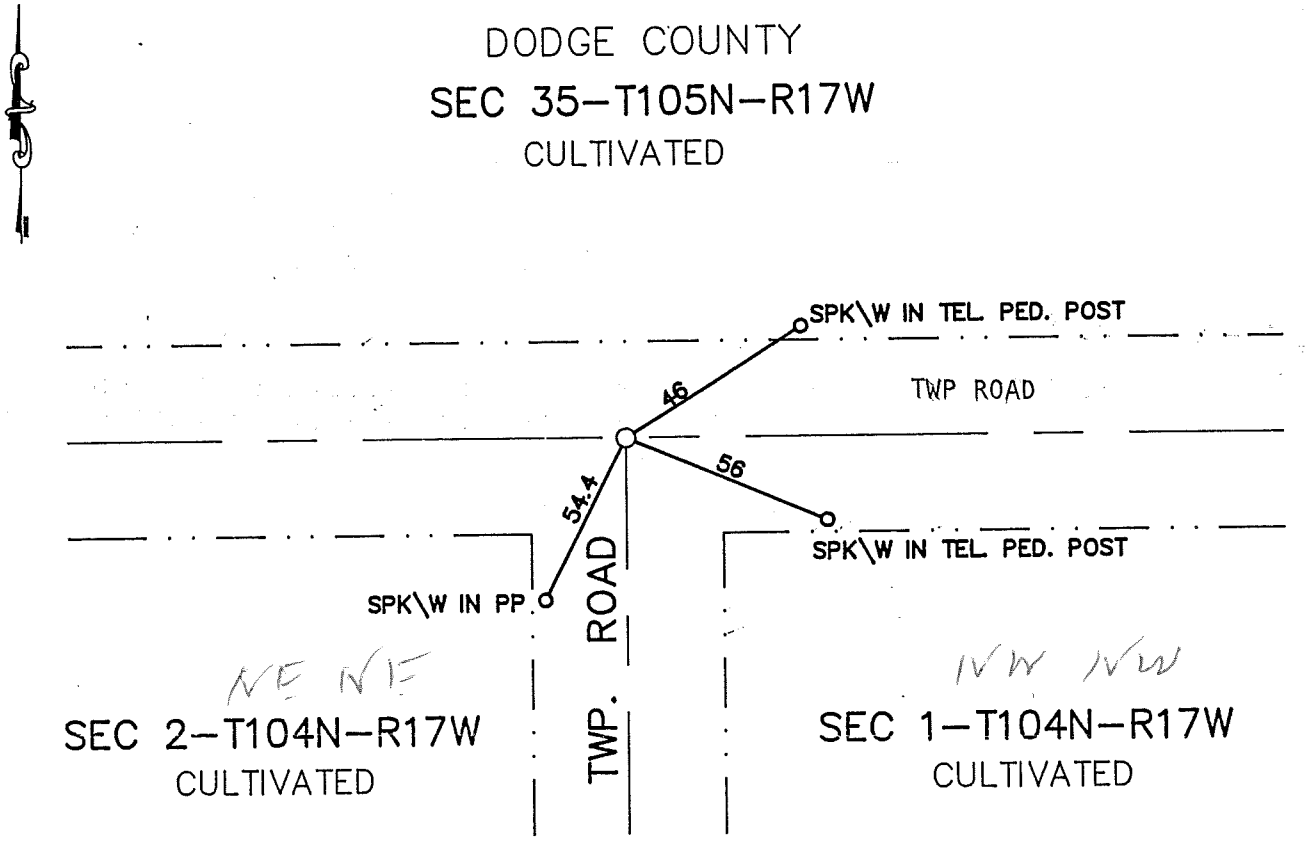

JONES, HAUGH & SMITH INC
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein were prepared by me or under my direct supervision.

SIGNATURE _____ DATE 1-30-96

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☒ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of Mower

I hereby certify that this document was filed in the County Rec. office at 3 P.M. on the 2 day of Feb A.D., 1996

COUNTY RECORDER Charles Ezzer

By Susan M. Davis, Deputy

DOCUMENT NO. 142315

M.H.D. FORM NO. 2105 BOOK 90 PAGE 164 Book 90 Misc Page 164

NE Cor SEC 2-104-17

This corner was originally established by Deputy Surveyor Elisha S. Norris of the U.S. General Land Office in 1853. The government notes show a wood post was set with mound of earth was built with a trench around.

The following were contacted for section corner information.

Mower County Highway Dept.
Mower County Recorder
Zenk Engineering
Tucker Land Surveying

No record of this corner was obtained from the above mentioned offices.

1993 Jones Haugh and Smith crew, under direction of John Schulte, Mower County Surveyor RLS 13807, dug with county backhoe at the CL of township road E-W and township road South. Found a 3/4"x16" pipe .30' deep capped RLS 14888. Continued digging to a depth of 5' and found a 12"x20" long field stone with a 3/4"x18" long rod resting on the West side of the stone. Placed a capped 5/8" iron above the field stone found.

The monument fit occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

For electronic survey data and analysis, contact the firm of Jones, Haugh and Smith Inc.