P120 P.60 "V" ✓

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

E1/4 Corner of Section 6, Township 104N Range 17W, 5TH P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch:

☐ On 9-2-93 (DATE) found a 12"x18" LONG STONE AND A 1/4x4" IRON STRAP WITH PIECES OF CLAY POTTERY AROUND STONE

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 9-2-93 (DATE) placed a CAST IRON MONUMENT

SKETCH OF REFERENCE TIES

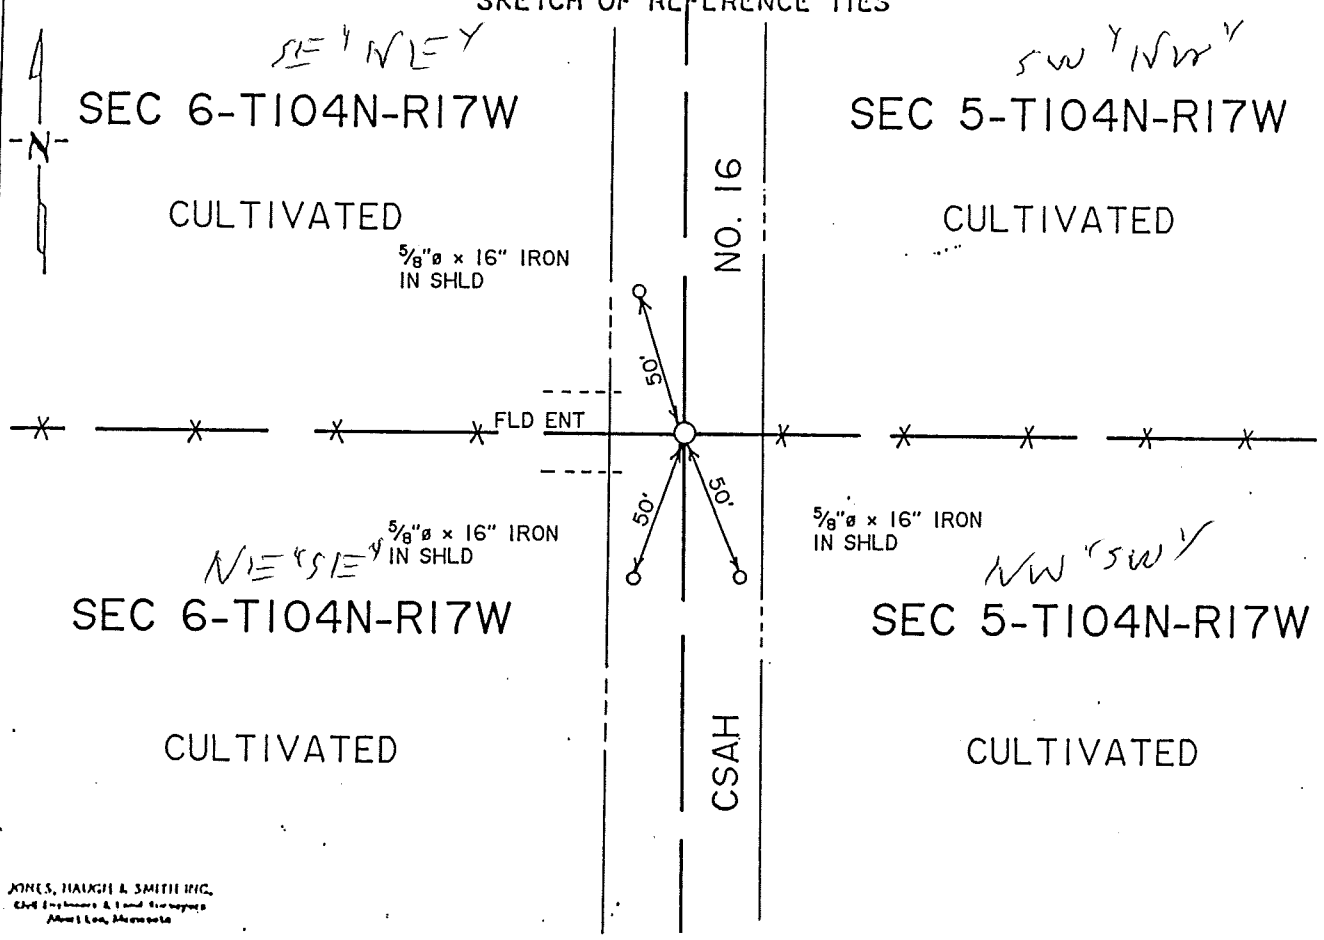

JONES, HAUGH & SMITH INC.
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

SIGNATURE _____ DATE 9-20-93

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☑ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of Mower

I hereby certify that this document was filed in the County Rec. office at 2 P.M. on the 29 day of Sept. A.D., 19 93

COUNTY RECORDER Orlando Enger

By Marlene Martin, Deputy

DOCUMENT NO. 423943

Bk 81 Misc Pg. 166

M.H.D. FORM NO. 2105

BOOK 81 PAGE 166

STATEMENT OF EVIDENCE

E 1/4 corner Section 6-104-17

This corner was originally established by Deputy Surveyor John Fitzpatrick of the U.S. General Land Office in 1853. The government notes show a wood post and stone were set with a mound of earth and trench.

The following were contacted for section corner information:
Mower County Highway Department
Mower County Recorder
Zenk Engineering
Tucker Land Surveying

The following information was obtained to support evidence of a perpetuation of the original public land survey corner.

1890 Clausen, Mower County Surveyor, notes indicate a government post at this location.

1993 Jones, Haugh & Smith Inc crew under the direction of John H. Schulte IV, Reg. No. 13807, dug with county backhoe a 4'x12'x5' deep hole on centerline of north-south County State Aid Highway No. 16 and in line with fences east and west. We found a 12" diameter x 18" long field stone tapered to a point at a depth of 4 feet which was virgin soil depth. Continued digging around stone and found pieces of old clay pottery and a 1/4" x 4" long iron strap. Continued digging below stone and found that it extended into clay soil. Therefore we left stone as found and set a 5/8" diameter x 16" iron capped RLS 13807 on the north side of stone and a cast iron monument near road surface above stone found.

The monument set fits occupation lines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

BOOK 81 PAGE 187