Index No. P60,188 "W"

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

SE Corner of Section 6, Township 104N, Range 17W, 5TH P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch:

☐ On 9-2-93 (DATE) found a 6"ø x 18"ø CONC MONUMENT

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 9-2-93 (DATE) placed a 5/8"ø x 16" IRON CAPPED RLS NO. 13807

SKETCH OF REFERENCE TIES

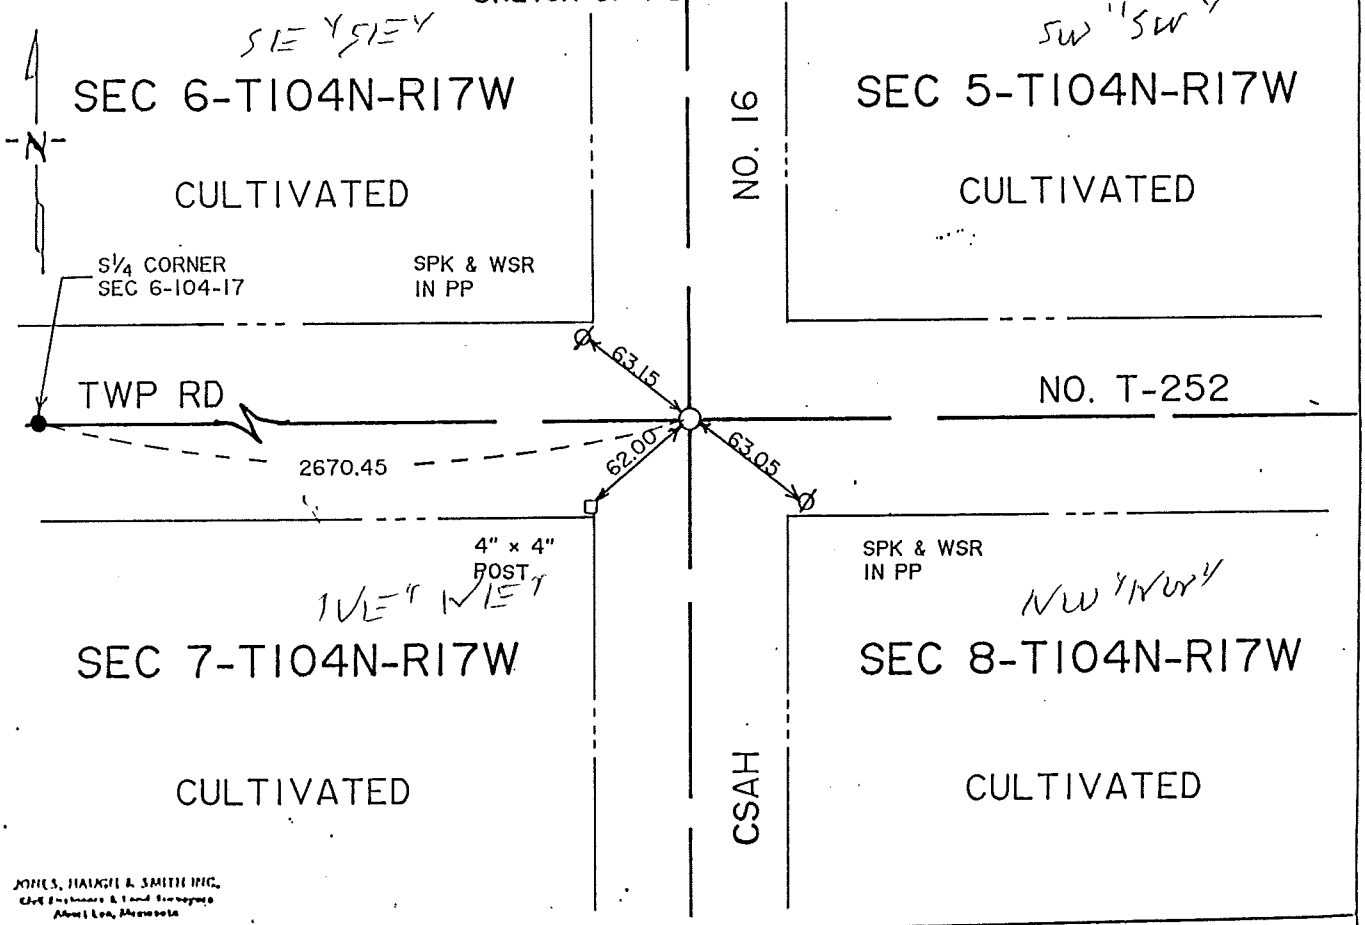

JONES, HAUGE & SMITH INC.
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

SIGNATURE _____ DATE 9-20-93

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☑ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of Mower

I hereby certify that this document was filed in the County Rec. office at 2 P .M. on the 27 day of Sept A.D., 1993

COUNTY RECORDER Charles Engar

By Marlene Martin, Deputy

DOCUMENT NO. 423944

Bk 81 Misc Pg 168

M.H.D. FORM NO. 2105

BOOK 81 PAGE 168

STATEMENT OF EVIDENCE

SE corner Section 6-104-17

This corner was originally established by Deputy Surveyor John Fitzpatrick of the U.S. General Land Office in 1853. The government notes show a wood post and stone were set with a mound of earth and trench.

The following were contacted for section corner information:
Mower County Highway Department
Mower County Recorder
Zenk Engineering
Tucker Land Surveying

The following information was obtained to support evidence of a perpetuation of the original public land survey corner.

1945 Mower County Highway Department Road Plans indicate a corner monument at this location.

1993 Jones, Haugh & Smith Inc crew under the direction of John H. Schulte IV, Reg. No. 13807, dug with county backhoe a 3'x8'x3' deep hole on centerline centerline of County State Aid Highway No. 16 and east-west township road and found a 8" diameter x 18" clay tile filled with concrete at a depth of two feet and on centerline centerline of said roads. Therefore we accepted concrete monument found as it has been noted as the section corner in the Mower County Road Plans of 1945. We left monument as found and placed a 5/8" diameter x 16" iron capped RLS 13807 near road surface above monument found.

The monument set fits occupation lines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

BOOK 82 PAGE 389