P.60

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

S1/4 Corner of Section 5, Township 104N Range 17W, 5TH P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch:

☐ On 6-7-93 (DATE) found a 8" x 20" LONG FIELD STONE

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 6-7-93 (DATE) placed a 5/8"ø x 16" IRON CAPPED RLS NO. 13807 AND A CIM

SKETCH OF REFERENCE TIES

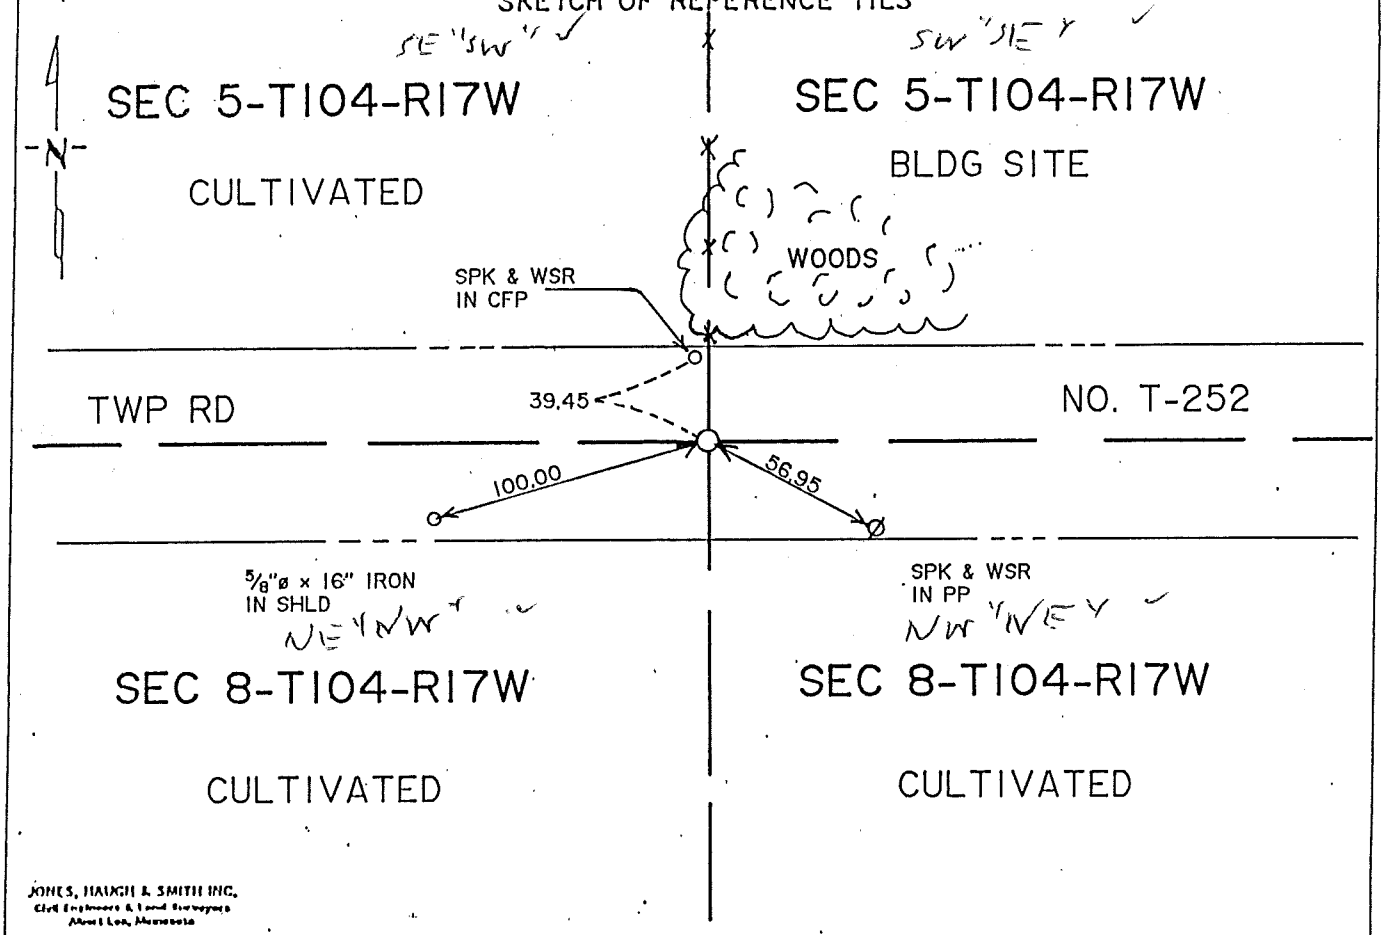

JONES, HAUGH & SMITH INC.
Civil Engineers & Land Surveyors
Mont Lea, Minnesota

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

SIGNATURE _____ DATE 7-26-93

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☒ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of Mower

I hereby certify that this document was filed in the County Rec. office at 3 P .M. on the 28 day of July A.D., 1993

COUNTY RECORDER Charles Emerson

By Marlene Martin, Deputy

DOCUMENT NO. 122530 Bk 80 Mtgs Pg. 392

MILD FORM NO. 2105 BOOK 80 PAGE 392

STATEMENT OF EVIDENCE

S 1/4 cor Sec 5-104-17

This corner was originally established by Deputy Surveyor John Fitzpatrick of the U.S. General Land Office in 1853. The government notes show a wood post and stone were set with a mound of earth and trench.

The following were contacted for section corner information:
Mower County Highway Department
Mower County Recorder
Zenk Engineering
Tucker Land Surveying

The following information was obtained to support evidence of a perpetuation of the original public land survey corner.

1890 Clausen, Mower County Surveyor, notes indicate a government post at this corner.

1993 Jones, Haugh & Smith Inc crew under the direction of John H. Schulte IV, RLS 13807, dug with the county backhoe a 5'x5'x10' long hole on the centerline of the east-west township road and in line with fence running north. At a depth of four feet we found a 8" diameter x 20" long field stone resting at virgin soil depth and also in line with fence and centerline of the township road. We continued digging into clay soil and found no evidence of the wood stake placed in 1853. Therefore we accepted stone found as the perpetuation of the original public land survey corner and placed a 5/8" diameter x 16" iron capped RLS 13807 on east side of stone and a cast iron monument near road surface and above stone found.

The monument set fits occupation lines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.