Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

SE Corner of Section 2, Township T104N, Range R17W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch

☐ On 11/04/1993 (DATE) found a 12" x 12" STONE

☒ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 11/04/1993 (DATE) placed a CAST IRON MONUMENT

SKETCH OF REFERENCE TIES

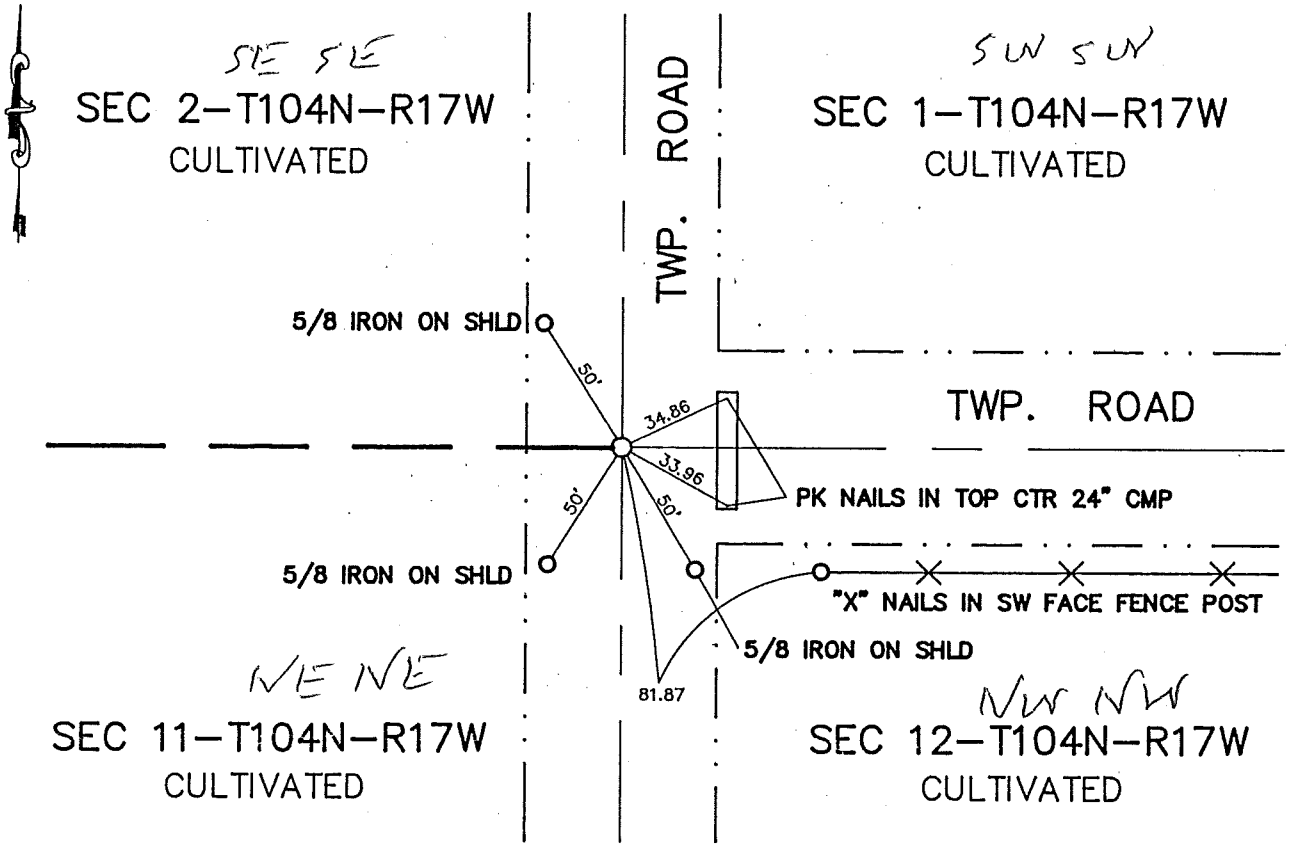

JONES, HAUGH & SMITH INC
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

BOOK 88 PAGE 67

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein were prepared by me or under my direct supervision.

SIGNATURE _____ DATE 8-7-95

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☒ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of Mower

I hereby certify that this document was filed in the County Rec. office at 4 P.M. on the 8 day of Aug A.D., 1995

COUNTY RECORDER Charles Engen
By Susan M. Davis, Deputy
DOCUMENT NO. 438497

M.H.D. FORM NO. 2105

BK 88 Misc Pg 67

SW Cor SEC 1-104-17

This corner was originally established by Deputy Surveyor John Fitzpatrick of the U.S. General Land Office in 1854. The government notes show a stone was set with a wood post and a mound of earth.

The following were contacted for section corner information.

Freeborn County Highway Dept.
Freeborn County Recorder
Zenk Engineering
Tucker Land Surveying

No record of this corner was obtained from the above mentioned offices.

1993 Jones, Haugh and Smith crew, under direction of John Schulte, Mower County Surveyor RLS 13807, dug with county backhoe on CL CL roads N-S and E, and in line with a fence to the west. Excavated a 3' X 10' X 5' deep hole and found a 12" X 12" X 10" field stone at a depth of 4.5'. The stone was in virgin soil 0.6' above the clay. Stone was accepted as true corner and a 5/8 iron was set on the south side. A CIM was set above the corner at the road surface.

The monument fit occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

For electronic survey data and analysis, contact the firm of Jones, Haugh and Smith Inc.