Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

SE Corner of Section 11, Township 104N, Range 17W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch:

☐ On 9-19-90 (DATE) found a 1/2"Ø eyebolt iron 2.0' North of East-West road in line with ℄ of North-South road.

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 9-19-90 (DATE) placed a cast iron monument over iron found.

SKETCH OF REFERENCE TIES

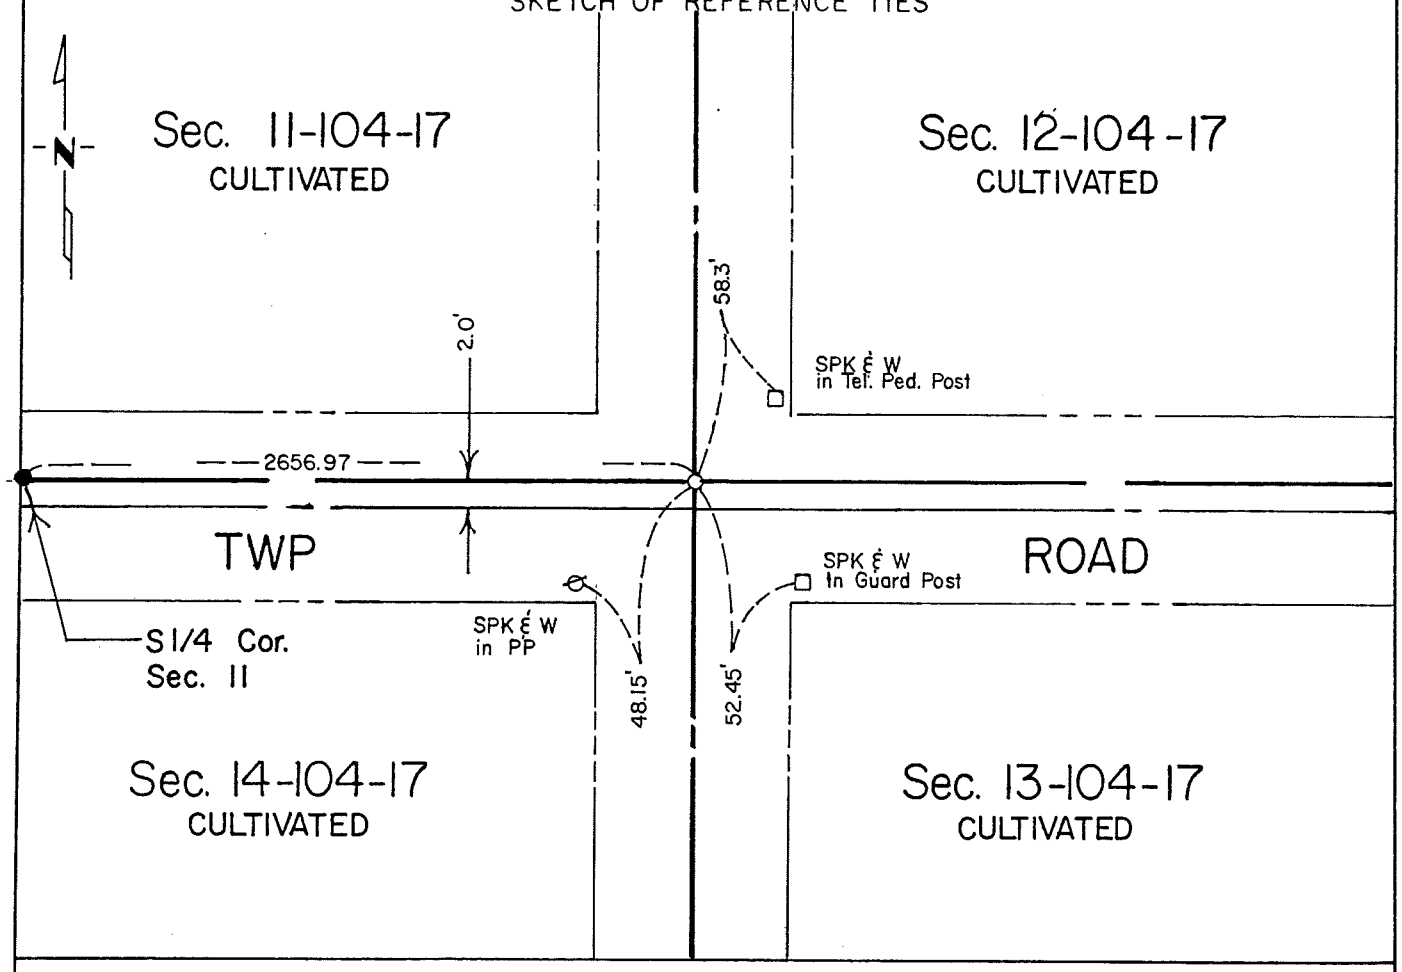

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

SIGNATURE _____ DATE 7-30-91

Registration No. 13807

☑ Land Surveyor, ☐ Professional Engineer

☐ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER

County of _____

I hereby certify that this document was filed in the County Rec. office at _____ .M. on the ____ day of _____ A.D., 19__

COUNTY RECORDER _____

By _____, Deputy

DOCUMENT NO. _____

M.H.D. FORM NO. 2105

STATEMENT OF EVIDENCE

SE corner Sec. 11-104-17

This corner was originally established by Deputy Surveyor John Fitzpatrick of the U.S. General Land Survey Office in 1853. The government notes show this corner was marked with a wood post, stone and a mound of earth with a trench.

The following were contacted for section corner information:

Mower County Engineering Department
Mower County Recorders Office

1990 Jones, Haugh & Smith crew along with a private backhoe dug a hole 10'x10'x6' deep on centerline centerline of north-south-east-west roads and uncovered a 1/2" diameter eyebolt iron 2.0' north of east-west road in line with centerline of north-south road. A cast iron monument was placed over iron found.

Corner found fits east-west road centerline and is accepted as best evidence found of the public land survey corner.

For electronic survey data and analysis contact the firm of Jones, Haugh & Smith Inc.