Index No. "I" P. 60 "P" P132

# CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

E1/4 Corner of Section 16, Township 104N, Range 17W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch:

☐ On 9-25-89 (DATE) found a 1"Ø iron flush with road surface 8.1' east of T.H. No. 56 ℄.

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On _____ (DATE) placed a _____

SKETCH OF REFERENCE TIES

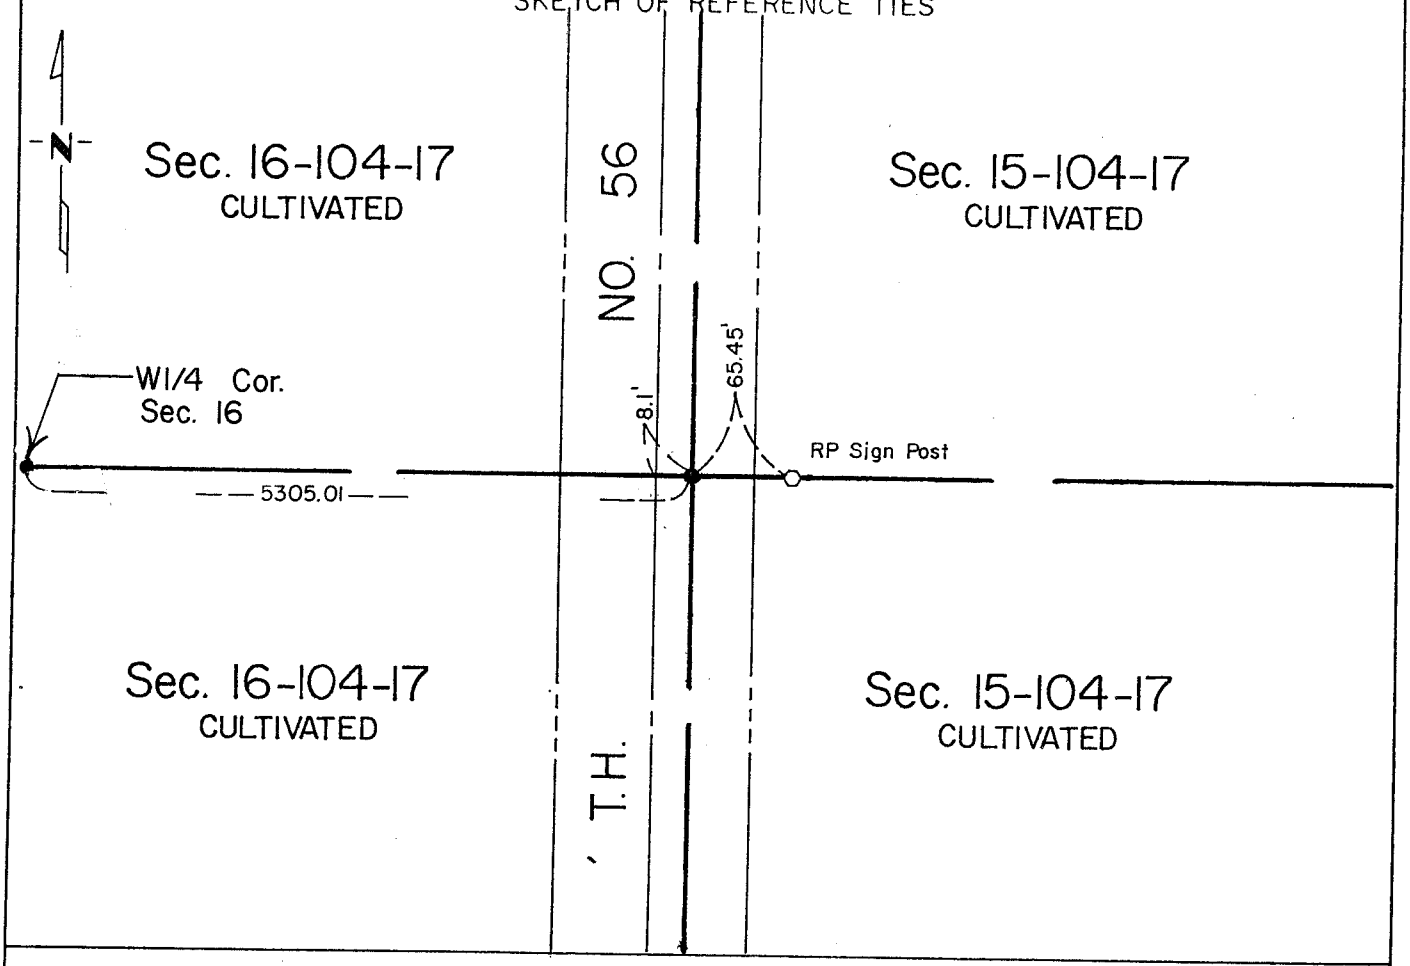


Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

SIGNATURE _____ DATE 9-18-90

Registration No. 13807

☒ Land Surveyor, ☐ Professional Engineer

☐ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER

County of _____

I hereby certify that this document was filed in the County Rec. office at _____ .M. on the _____ day of _____ A.D., 19 ___

COUNTY RECORDER _____

By _____, Deputy

DOCUMENT NO. _____

M.H.D. FORM NO. 2105

STATEMENT OF EVIDENCE

E 1/4 corner Section 16-104-17

This corner was originally established by Deputy Surveyor John Fitzpatrick of the U.S. General Land Survey Office in 1853. The government notes show this corner was marked with a wood post and a stone with a trench and a mound of earth.

The following were contacted for section corner information:

Mower County Engineering Department
Mower County Recorder's Office

1940 Mower County Grading Plan shows a 1" diameter iron at this location.

1990 Jones, Haugh & Smith crew found a 1" diameter iron flush with the road surface 8.1 feet east of the centerline of Trunk Highway No. 56.

For electronic survey data and analysis contact the firm of Jones, Haugh & Smith Inc.

Recorded at Register of Deeds 4-21-77 Index No. T12 BOOK P60

# CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

EAST QUARTER Corner of Section 16, Township 104N, Range 17W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch:

☐ On _____ (DATE) found a _____

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☒ On 9-3-75 (DATE) placed a MINNESOTA HIGHWAY DEPARTMENT CAST IRON MONUMENT DOWN ½ INCH.

SKETCH OF REFERENCE TIES

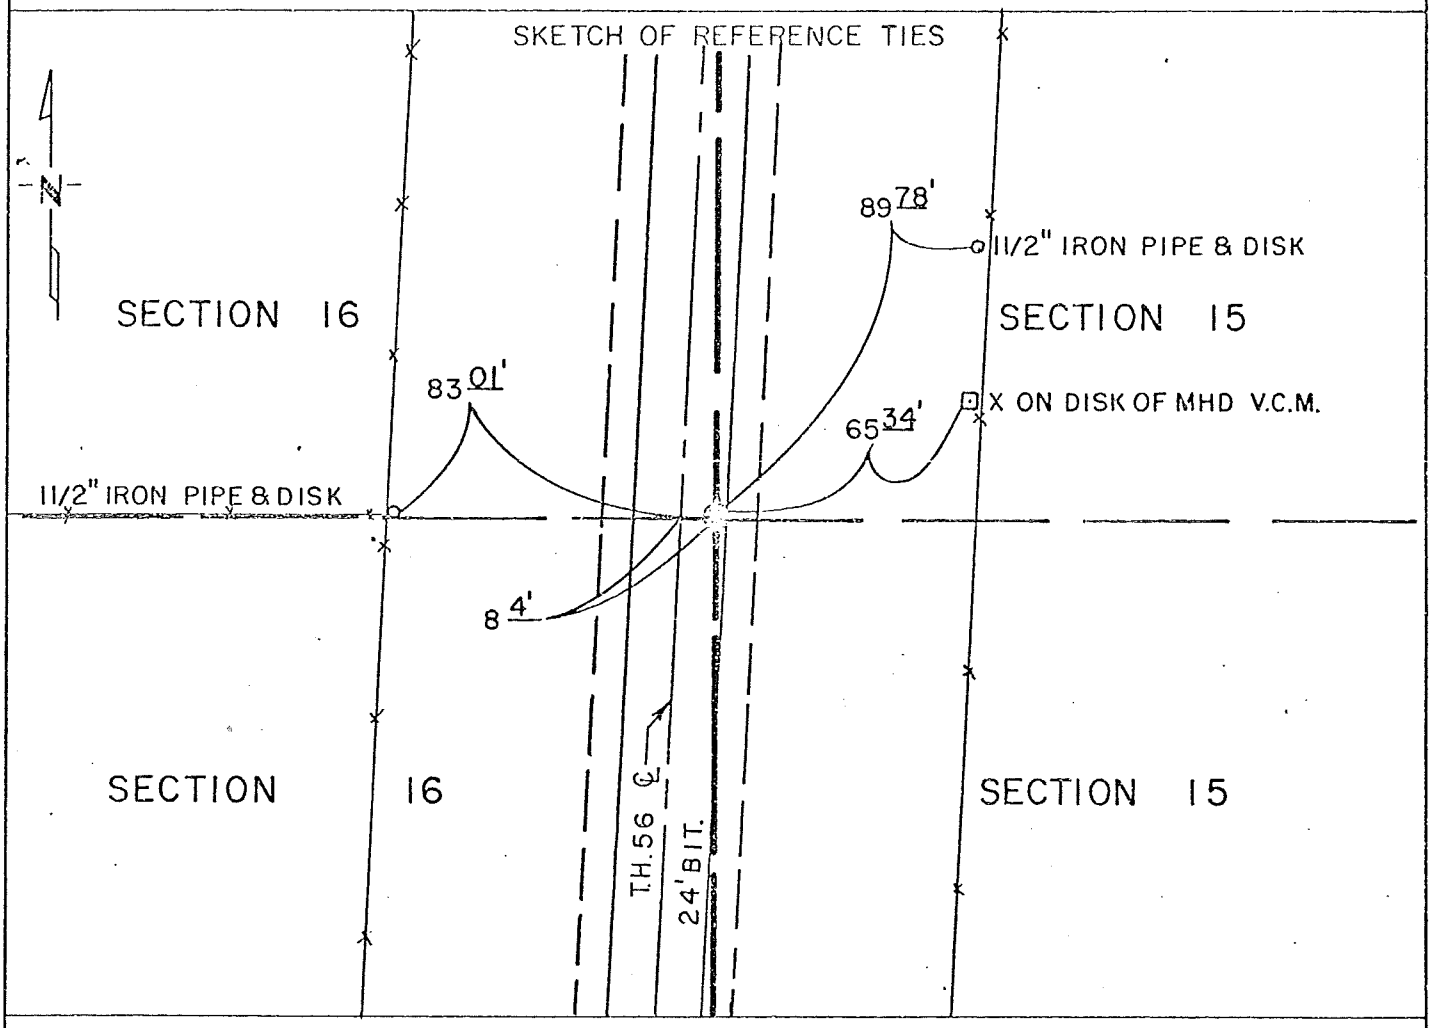


Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

Ronald R Rukuding 9/8/75
(SIGNATURE) (DATE)

Registration No. 10162

☒ Land Surveyor, ☐ Professional Engineer

☐ County Surveyor, ☐ County Engineer

OFFICE OF THE REGISTER OF DEEDS
County of _____

I hereby certify that this document was filed in the Reg. of Deeds office at _____ .M. on the _____ day of _____ A.D., 19 ___

Register of Deeds _____

By _____, Deputy

DOCUMENT NO. _____

M.H.D. FORM NO. 2105

Statement of Evidence:

EAST QUARTER CORNER, SECTION 16, TOWNSHIP 104N, RANGE 17W, 5th P.M.

November 1853 — John Fitzpatrick, Deputy Surveyor, set post, made a mound of earth and sod with trench and pits and deposited stone for the corner during the Original Public Land Survey.

July 1929 — C. Aasland, Minnesota Highway Department Engineer, found a stone 8.4 feet east of POT 1287+96 for the corner.

1975 — Minnesota Highway Department placed a cast iron monument for the corner 1/2 inch below the surface, 8.4 feet east of POT 1287+96.0.

An analysis of the record and survey data indicates that the stone found in 1929 fits the occupation lines. This position is accepted as a perpetuation of the Public Land Survey Corner.

For details of the survey data, contact the Minnesota Highway Department's District Surveying and Mapping Section, Rochester.

Index No. _____

# CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

EAST QUARTER Corner of Section 16, Township 104N, Range 17W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch:

☐ On _____ (DATE) found a _____

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☒ On 9-3-75 (DATE) placed a MINNESOTA HIGHWAY DEPARTMENT CAST IRON MONUMENT DOWN ½ INCH.

SKETCH OF REFERENCE TIES

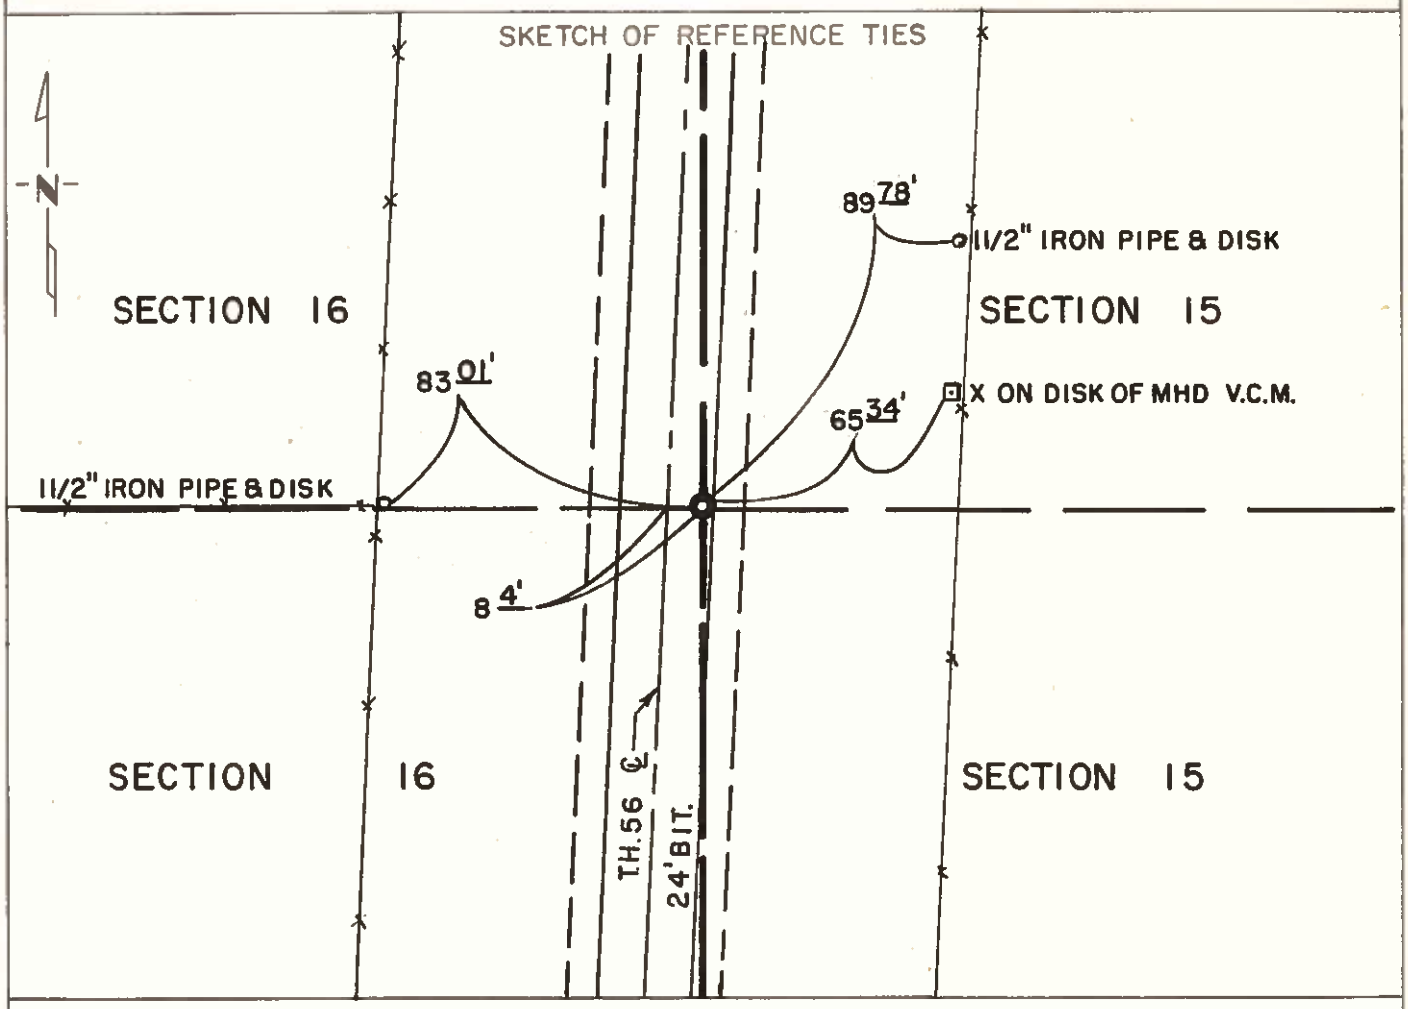


Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

Donald R Beckendorf (SIGNATURE) 9/8/75 (DATE)

Registration No. 10162

☒ Land Surveyor, ☐ Professional Engineer

☐ County Surveyor, ☐ County Engineer

OFFICE OF THE REGISTER OF DEEDS
County of Mower

I hereby certify that this document was filed in the Reg. of Deeds office at 12:30 P.M. on the 1 day of Oct. A.D., 19 75

Register of Deeds Charles Enger

By Dorothy Johnson, Deputy

DOCUMENT NO. 319647

MHD FORM NO. 2105 ALL PAGE 464 ... Book ... Misc. Page 464

Statement of Evidence:

EAST QUARTER CORNER, SECTION 16, TOWNSHIP 104N, RANGE 17W, 5th P.M.

November 1853 — John Fitzpatrick, Deputy Surveyor, set post, made a mound of earth and sod with trench and pits and deposited stone for the corner during the Original Public Land Survey.

July 1929 — C. Aasland, Minnesota Highway Department Engineer, found a stone 8.4 feet east of POT 1287+96 for the corner.

1975 — Minnesota Highway Department placed a cast iron monument for the corner 1/2 inch below the surface, 8.4 feet east of POT 1287+96.0.

An analysis of the record and survey data indicates that the stone found in 1929 fits the occupation lines. This position is accepted as a perpetuation of the Public Land Survey Corner.

For details of the survey data, contact the Minnesota Highway Department's District Surveying and Mapping Section, Rochester.