"P" p60, "B" p132

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

NW Corner of Section 16, Township 104W, Range 17W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch:

☐ On 9-25-89 (DATE) found a 1/2"Ø iron in 6" round concrete monument 3.0' below road surface on ℄℄ of N-S-E-W roads.

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 9-25-89 (DATE) placed a 5/8"Ø iron capped 13807 over monument found.

SKETCH OF REFERENCE TIES

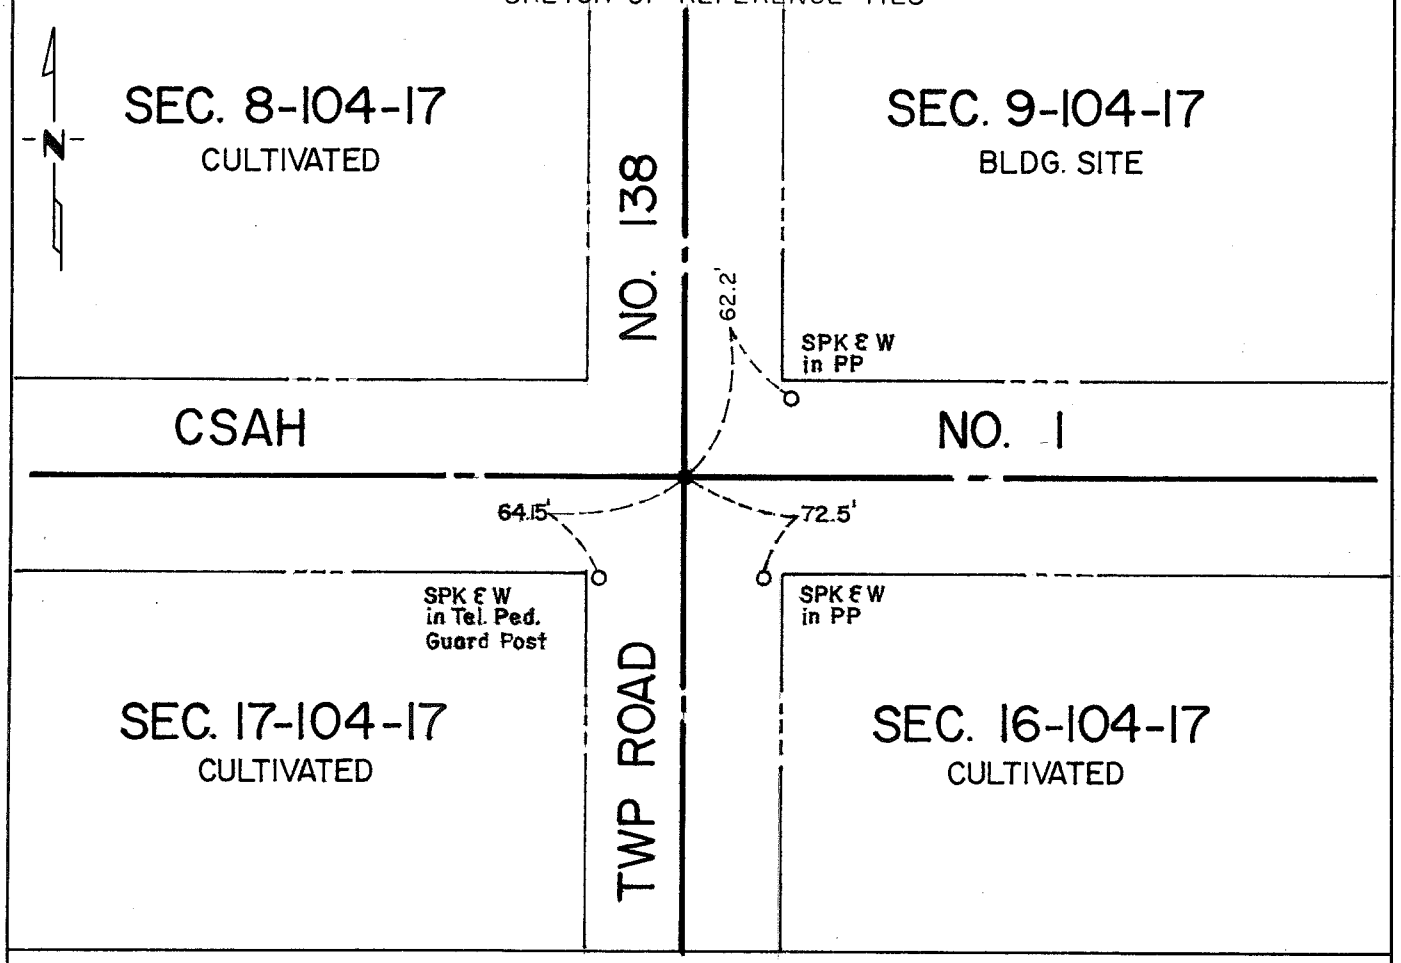

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

_____ 9-17-90
SIGNATURE DATE

Registration No. 13807

☒ Land Surveyor, ☐ Professional Engineer

☐ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER

County of _____

I hereby certify that this document was filed in the County Rec. office at _____ .M. on the _____ day of _____ A.D., 19__

COUNTY RECORDER _____

By _____, Deputy

DOCUMENT NO. _____

M.H.D. FORM NO. 2105

STATEMENT OF EVIDENCE

NW corner Section 16-104-17

This corner was originally established by Deputy Surveyor John Fitzpatrick of the U.S. General Land Survey Office in 1853. The government notes show this corner was marked with a wood post, a stone and a trench with a mound of earth.

The following were contacted for section corner information:

Mower County Engineering Department
Mower County Recorder's Office

1956 Record Book 'A' in the County Engineer's Office shows a concrete monument inplace and the following ties were taken:

PP	SE	72.2 ft
PP	SW	63.8 ft

1990 Jones, Haugh & Smith crew with the Mower County backhoe dug on centerline centerline of north-south-east-west roads and found a 1/2" diameter iron in 6" diameter round concrete monument 3.0 feet below road surface. Reset capped 5/8" diameter iron at road surface over monument found.

Corner found fits road centerlines and is accepted as best evidence and perpetuation of the public land survey corner.

For electronic survey data and analysis contact the firm of Jones, Haugh & Smith Inc.

Index No. NP

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

NW Corner of Section 16, Township 104N, Range 17W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch:

☒ On 9-25-89 (DATE) found a 1/2 Ø" IRON CAST IN 6" ROUND CONC. MONUMENT.

☒ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☒ On 9-25-89 (DATE) placed a 5/8" Ø IRON CAPPED RLS 13807 OVER CONC. MONUMENT ON ROAD SURFACE.

SKETCH OF REFERENCE TIES

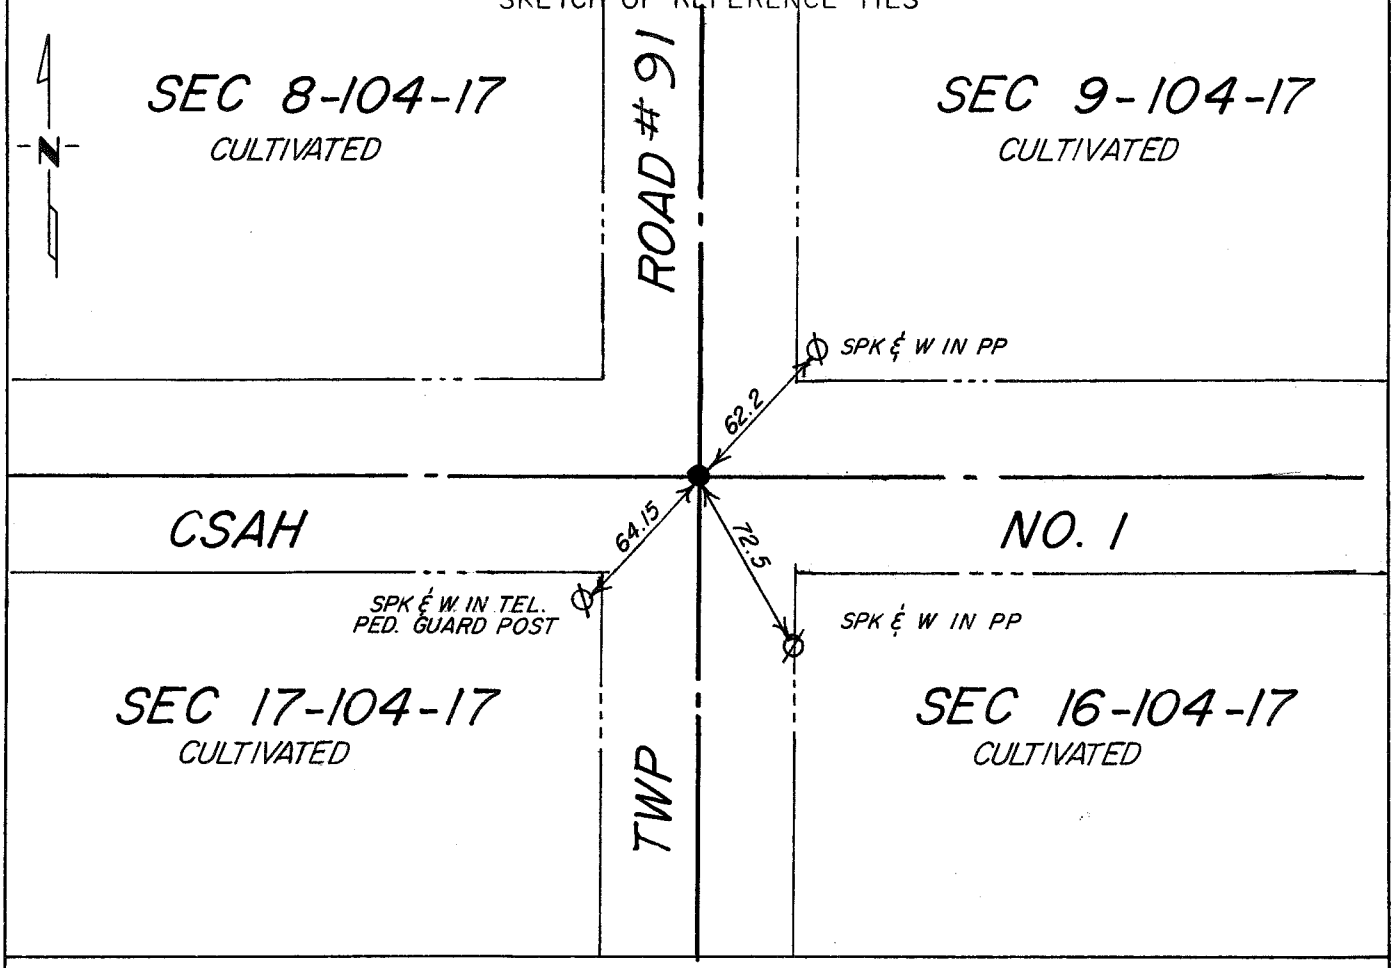

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

[signature] SIGNATURE 12-21-89 DATE

Registration No. 13807

☒ Land Surveyor, ☐ Professional Engineer

☐ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER

County of _____

I hereby certify that this document was filed in the County Rec. office at _____ .M. on the _____ day of _____ A.D., 19__

COUNTY RECORDER _____

By _____, Deputy

DOCUMENT NO. _____

M.H.D. FORM NO. 2105

STATEMENT OF EVIDENCE

NW 1/4 corner Section 16-104-17

This corner was originally established by Deputy Surveyor John Fitzpatrick of the United States General Land Office in 1854. The government notes show this corner was marked with a charred stake together with a mound of earth and trench.

The following were contacted for section corner information:

Mower County Highway Department
Mower County Records Office

1930+ Mower County grading plan shows a concrete monument inplace and ties were taken during road project.

1989 Jones, Haugh & Smith Inc. personnel together with the Mower County backhoe operator dug a 6'x 6' x 2' deep hole and uncovered a 1/2" diameter iron cast in a 6" diameter concrete monument 2' below the road surface. Placed a 5/8" diameter x 16" iron capped RLS 13807 over concrete monument on road surface.

The monument found fits occupation and road centerlines within the section and agrees with past records from the Mower County Highway Department.

For electronic survey data and analysis, contact firm of Jones, Haugh & Smith.