Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

N1/4 Corner of Section 18, Township 104N Range 17W, 5TH P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch:

☐ On 10-9-92 (DATE) found a NOTHING

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 6-12-93 (DATE) placed a CAST IRON MONUMENT

SKETCH OF REFERENCE TIES

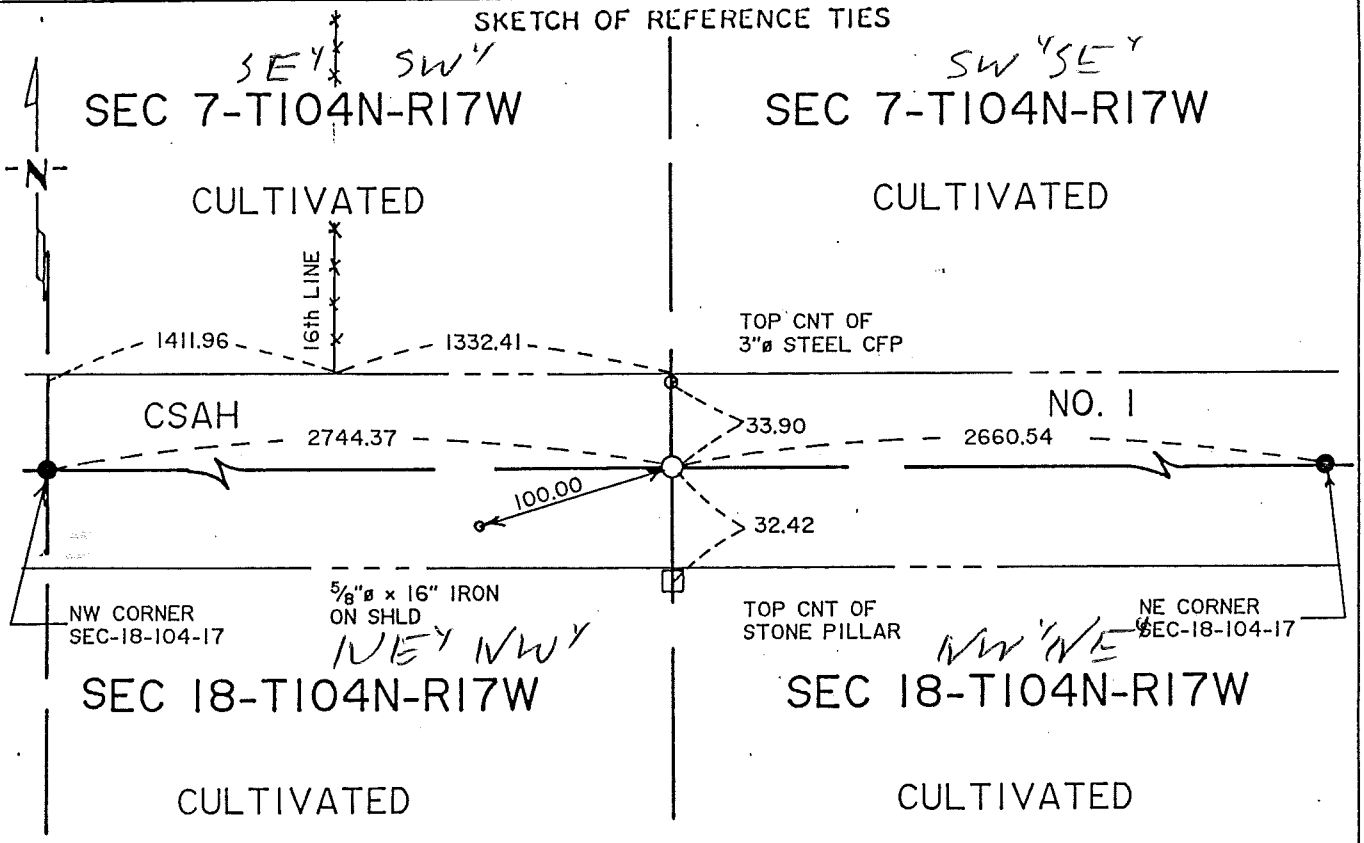

JONES, HAUGH & SMITH INC.
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

SIGNATURE _____ DATE 6-18-93

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☑ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of Mower

I hereby certify that this document was filed in the County Rec. office at 4 P.M. on the 24 day of June A.D., 1993

COUNTY RECORDER Maureen Mertes

By Maureen Mertes, Deputy

DOCUMENT NO. 421720

Bk 80 Misc Pg 119

M.H.D. FORM NO. 2105

BOOK 80 PAGE 119

STATEMENT OF EVIDENCE

N 1/4 cor Sec 18-104-17

This corner was originally established by Deputy Surveyor John Fitzpatrick of the U.S. General Land Office in 1853. The government notes show a wood post was set with a mound of earth and trench.

The following were contacted for section corner information:
Mower County Highway Department
Mower County Recorder
Zenk Engineering
Tucker Land Surveying

The following information was obtained to support evidence of the perpetuation of the original public land survey corner.

1882 Clausen, Mower County Surveyor, notes indicate a government post at this location.

1892 Clausen, Mower County Surveyor, notes indicate a stone inplace at this corner.

1992 Jones, Haugh & Smith Inc crew under the direction of John H. Schulte IV, RLS 13807, dug with the County backhoe a 4'x12'x5' hole. At a depth of four feet we uncovered a large deposit of 3" diameter quarry stone. It appears a core cut was made at this location which would have destroyed all evidence of a perpetuation of this corner of the original public land survey corner.

1993 Jones, Haugh & Smith Inc crew under the direction of John H. Schulte IV, RLS 13807, established this corner on a straight line between the northwest and northeast corner of Section 18 and also in line with the line fences running north and south.

The monument set fits occupation lines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

BOOK 80 PAGE 120