Index No. p 60 ; "A" p132 ; "A"

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

NE Corner of Section 18, Township 104N Range 17W, 5TH P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch:

☐ On 10-9-92 (DATE) found a 8"x15" CONCRETE MONUMENT

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 10-9-92 (DATE) placed a CAST IRON MONUMENT

SKETCH OF REFERENCE TIES

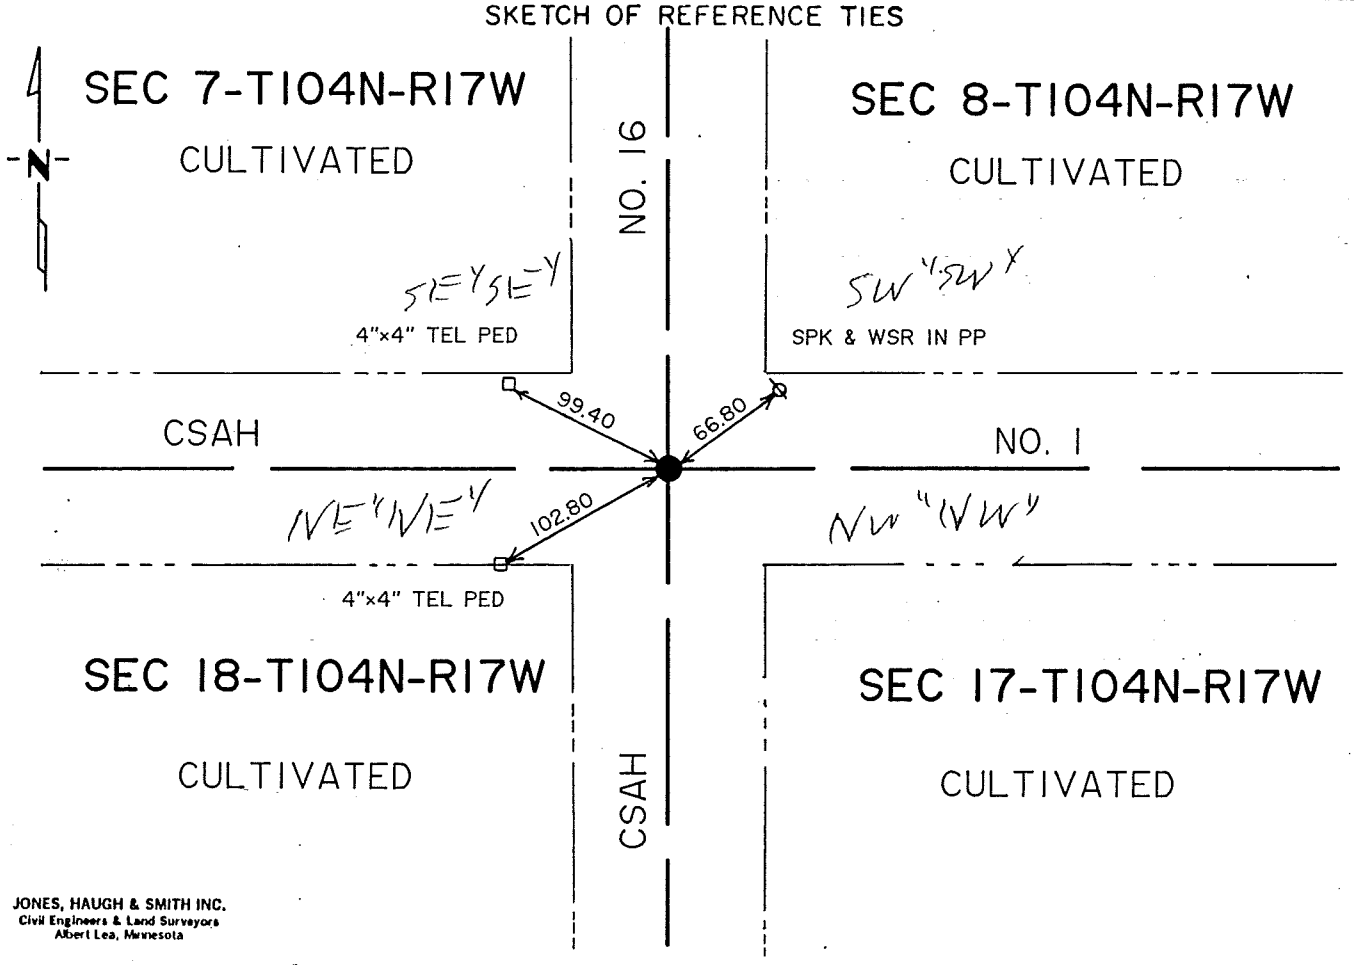

JONES, HAUGH & SMITH INC.
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

SIGNATURE 4-30-93 DATE

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☑ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of Mower

I hereby certify that this document was filed in the County Rec. office at 3 P.M. on the 4 day of May A.D., 19 93

COUNTY RECORDER Charles Evenson

By Marlene Martin, Deputy

DOCUMENT NO. 420488

Bk 79 Misc Pg 342

M.H.D. FORM NO. 2105

BOOK 79 PAGE 342

STATEMENT OF EVIDENCE

NE corner Sec. 18-104-17

This corner was originally established by Deputy Surveyor John Fitzpatrick of the U.S. General Land Survey Office in 1854. The government notes show corner was marked with a wood post and charred stake and a trench with a mound of earth.

The following were contacted for section corner information:
Mower County Engineering Department
Mower County Recorder
Tucker Land Surveying
Minnesota Department of Transportation

The following information was obtained to support evidence of a perpetuation of the original public land survey corner.

1931 County Grading Plan shows a concrete monument inplace and the following ties were recorded in Book 'A' in the office of the Mower County Engineer:

NE to power pole	42.9'
NE to cor fence post	35.2'
NW to cor fence post	38.9'
SW to tele pole	43.2'
SW to W end culvert	27.6'
SE to E end culvert	27.4'

1956 Recorded in Book 'A' show Highway Department uncovered a concrete monument and the following ties were taken:

NE to power pole	42.9'
NW to fence post	60.8'
SE to power pole	90.7'
SW to tele pole	58.5'

1992 Jones, Haugh & Smith crew under the direction of John H. Schulte IV, dug with the county backhoe on centerline centerline of County Roads north, south, east and west and uncovered a 8" diameter x 15" long concrete monument over two lengths of 4"x16" long concrete monument in clay tiles extending 3.5 feet into virgin soil. Set cast iron monument over the 4" diameter concrete monument on road surface.

The monument found fits occupation and road centerlines within the section, agrees with past records and is accepted as best evidence of the original public land survey corner.

For electronic survey data and analysis contact the firm of Jones, Haugh & Smith Inc.

BOOK 79 PAGE 343

Jones, Haugh