Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

SE Corner of Section 18, Township 104N Range 17W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch

☐ On 07/14/1995 (DATE) found a 6" TILE FILLED WITH CONC. WITH 3/4" IRON IN SIDE

☒ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 07/14/1995 (DATE) placed a CAST IRON MONUMENT

SKETCH OF REFERENCE TIES

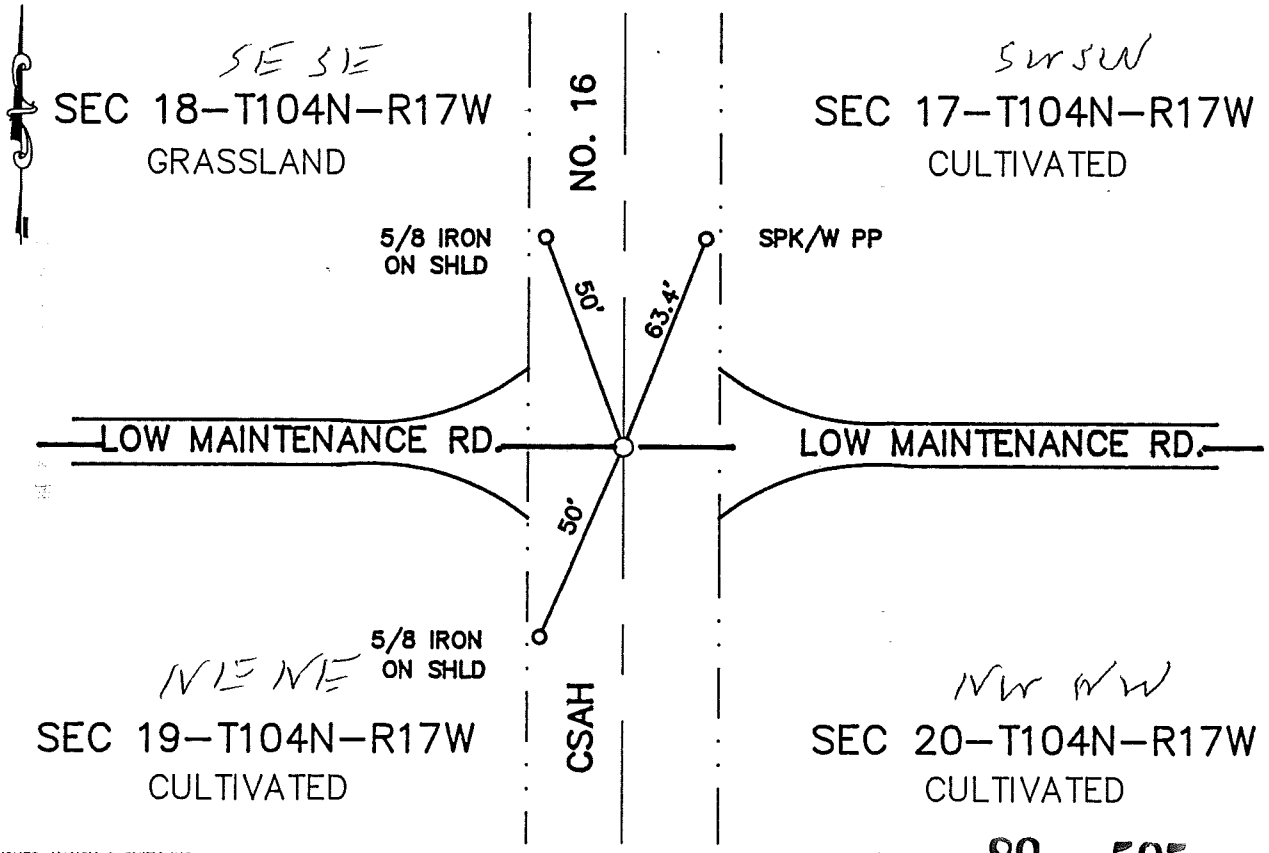

JONES, HAUGH & SMITH INC
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

BOOK 89 PAGE 595

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein were prepared by me or under my direct supervision.

_____ (SIGNATURE) 12-27-95 (DATE)

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☒ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of Mower

I hereby certify that this document was filed in the County Rec. office at 2 p .M. on the 4 day of Jan A.D., 19 96

COUNTY RECORDER Charles Engen

By Susan M. Davis, Deputy

DOCUMENT NO. 441761

M.H.D. FORM NO. 2105

Book 89 Misc Page 595

SE Cor SEC 18-104-17

This corner was originally established by Deputy Surveyor John Fitzpatrick of the U.S. General Land Office in 1853. The government notes show a stone was placed with a mound of earth and trench.

The following were contacted for section corner information.

Mower County Highway Dept.
Mower County Recorder
Zenk Engineering
Tucker Land Surveying

No record of this corner was obtained from the above mentioned offices.

1995 Jones, Haugh and Smith crew, under direction of John Schulte, Mower County Surveyor RLS 13807, dug with county backhoe at the CL of CSAH No.16 and the CL of low maintenance East and West. Found a 6" tile filled with concrete with a 3/4" iron inside the tile 2' below the road surface. Continued digging and found a large rock with a hub on the North side of it. Placed a cast iron monument at the road surface.

The monument fit occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

For electronic survey data and analysis, contact the firm of Jones, Haugh and Smith Inc.