Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

NE Corner of Section 22, Township 104N Range 17W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch

☐ On _____ (DATE) found a _____

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☒ On 02/18/2003 (DATE) placed a 1 1/2" X 3" IRON SPIKE

SKETCH OF REFERENCE TIES

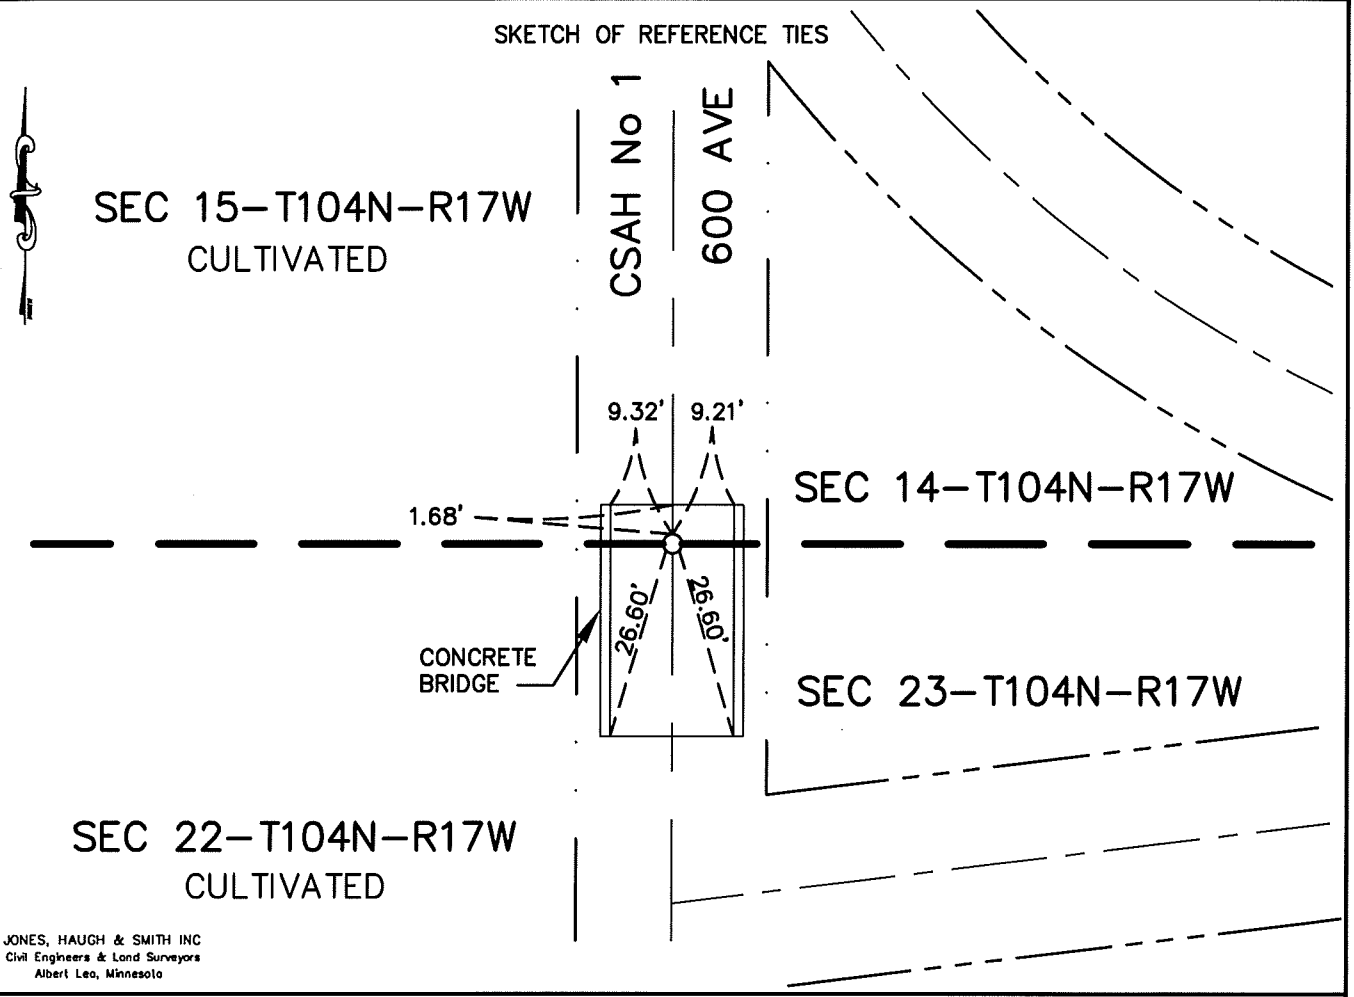

JONES, HAUGH & SMITH INC
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein were prepared by me or under my direct supervision.

_____ (SIGNATURE) 2-25-03 (DATE)

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☒ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of _____

I hereby certify that this document was filed in the County Rec. office at _____ .M. on the _____ day of _____ A.D., 19___

COUNTY RECORDER _____

By _____, Deputy

DOCUMENT NO. _____

M.H.D. FORM NO. 2105

NE Cor Sec 22-104-17

Deputy Surveyor John Fitzpatrick of the U.S. General Land Office originally established this corner in 1853. The government notes show a wood post was set with mound of earth and trench.

The following were contacted for section corner information.

Mower County Highway Dept.
Mower County Recorder
Tucker Land Surveying

1928 Mower County Highway Dept. road plan shows a section corner in the bridge.

1956 Mower County surveyor's notes show a concrete monument at this location.

1956 Mower County Highway Dept. road plan shows a concrete monument inplace 1.68' South of the North end of bridge.

2003 Jones Haugh and Smith crew, under direction of John Schulte, Mower County Surveyor RLS 13807, used the ties shown on the 1956 Mower County Highway road plan to reset corner. Set a 1 ½" x 3" long spike in concrete bridge deck.

The monument is in agreement with previous records and fits occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

For electronic survey data and analysis, contact the firm of Jones, Haugh and Smith Inc.