Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

W 1/4 Corner of Section 32, Township 104N Range R17W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch

☐ On 1980 (DATE) found a concrete monument with 1/2"ø iron pin

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 9-22-99 (DATE) placed a cast iron monument over 5/8"ø at road surface

SKETCH OF REFERENCE TIES

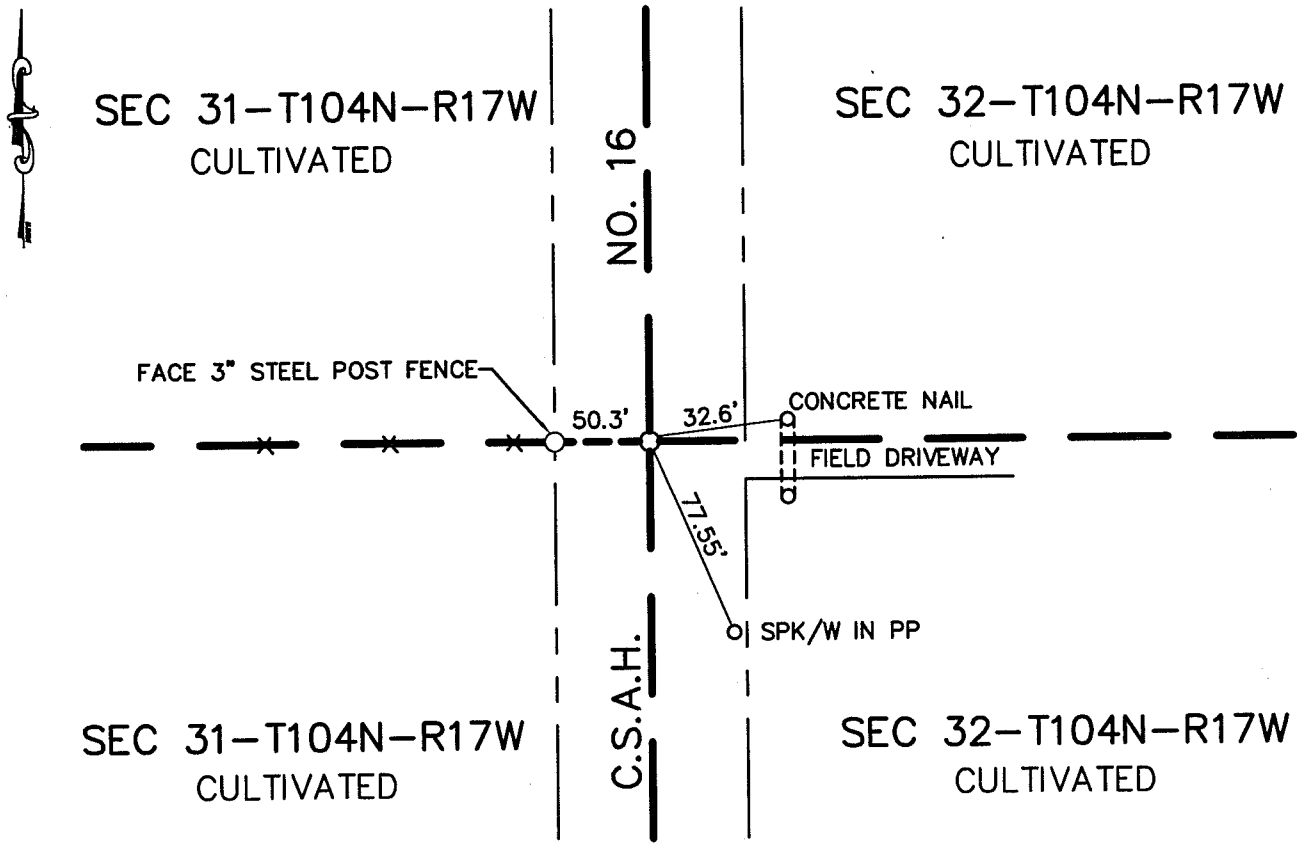

JONES, HAUGH & SMITH INC
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein were prepared by me or under my direct supervision.

SIGNATURE _____ DATE 10-22-99

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☒ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER

County of _____

I hereby certify that this document was filed in the County Rec. office at _____ .M. on the _____ day of _____ A.D., 19___

COUNTY RECORDER _____

By _____, Deputy

DOCUMENT NO. _____

M.H.D. FORM NO. 2105

W 1/4 Cor Sec 32-104-17

This corner was originally established by Deputy Surveyor John Fitzpatrick of the U.S. General Land Office in 1853. The government notes show a wood post was set with mound of earth and trench.

The following were contacted for section corner information.

Mower County Highway Dept.
Mower County Recorder
Tucker Land Surveying

No record of this corner was obtained from the above mentioned offices.

1980 Jones Haugh and Smith crew, under direction of John Schulte, Mower County Surveyor RLS 13807, uncovered concrete monument with 1/2" iron pin, on the centerline of C.S.A.H. NO. 16 and in line with line fence west. Set capped 5/8" over monument found - cap NO. 13807.

1999 Jones Haugh and Smith crew, under direction of John Schulte, Mower County Surveyor RLS 13807, uncovered capped 13807 5/8" iron .60' below road surface on the centerline of C.S.A.H. NO. 16 and in line with line fence west. Removed cap and set cast iron monument over 5/8" at road surface.

The monument fits occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

For electronic survey data and analysis, contact the firm of Jones, Haugh and Smith Inc.