CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

Northeast Corner of Section 31, Township 104, Range 17, 5th P.M. STATE OF MINNESOTA, County of Mower


At the corner location shown on the sketch:

☐ On 5-16-90 found a 20 penny spike.

☐ left monument as found, ☐ lowered monument, ☒ removed monument (expl.)

☐ On 6-22-90 placed a Standard County Monument.

SKETCH OF REFERENCE TIES

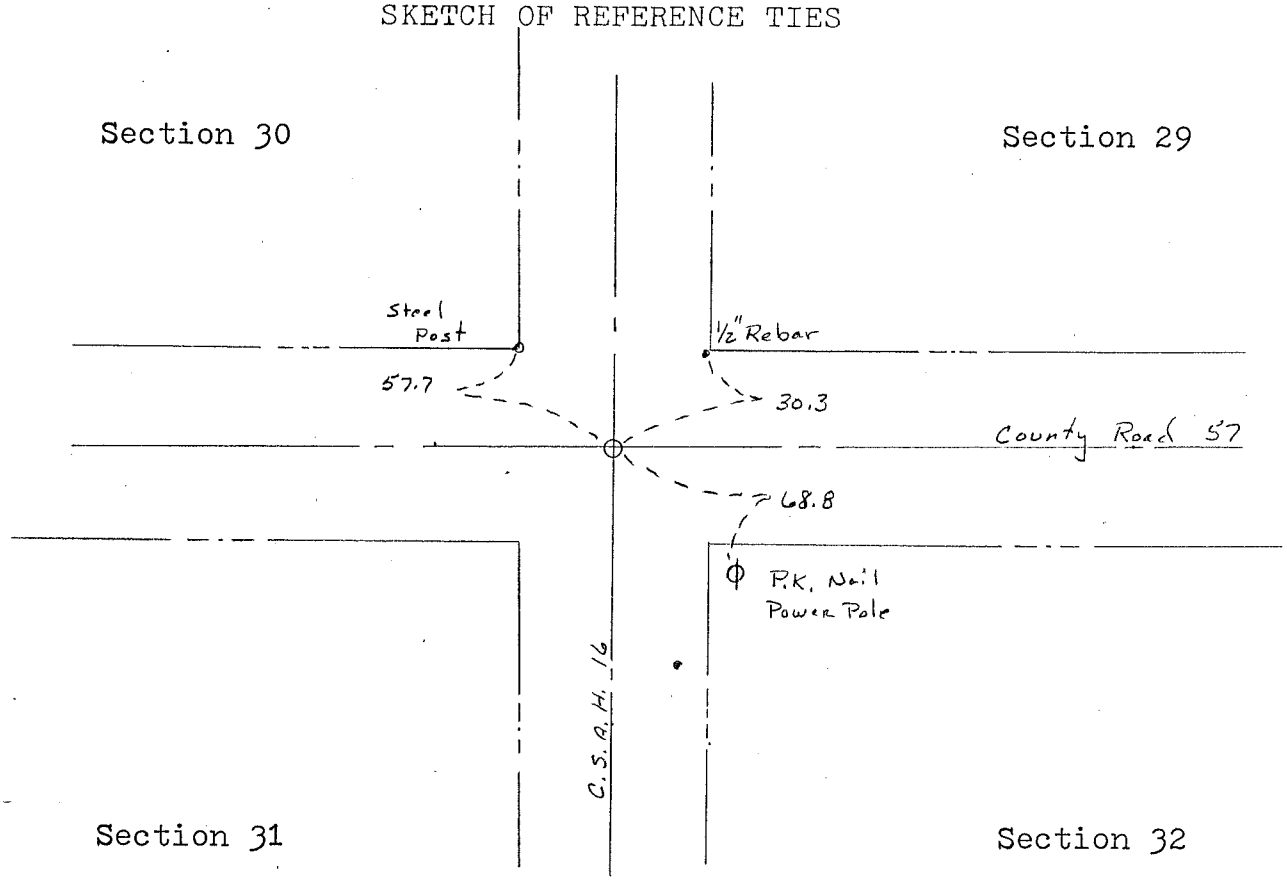

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

Raymond J. Tauke — Signature
6-25-90 — Date

Registration No. 15471
☒ Land Surveyor, ☐ Prof. Engineer
☐ County Surveyor, ☐ County Engr.

OFFICE OF THE COUNTY RECORDER
County of _____

I hereby certify that this document was filed in the County Recorders office at _____.M. on the ___ day of _____ A.D., 19___.

County Recorder _____

By _____, Deputy

DOCUMENT NO. _____

STATEMENT OF EVIDENCE:

NORTHEAST CORNER SECTION 31 - T104N - R17W

1853 - John Fitzpatrick, Deputy Surveyor, set a corner section post deposited a stone, made mound of earth and sod with trench and pits during the Original Public Land Survey.

1931 - Mower County Highway Department notes show a large pointed granite rock.

1970 - Mower County Highway Department notes show an inplaced concrete monument below a bit. surface.

May 1990 - Tucker Land Surveying excavated this location and found a 20 penny spike. Excavated 3 feet deep x 6 feet North-South x 4 feet East-West, found nothing. Replaced spike with a standard County Monument.

The above corner agrees with a electronic survey made of monuments and occupation lines in the area and is accepted as a perpetuation of the public land survey corner.

For details of the analysis and electric survey data contact: Tucker Land Surveying, Dexter, Minnesota 55926.