# CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

Northeast Corner of Section 32, Township 104, Range 17, 5th P.M. STATE OF MINNESOTA, County of Mower


At the corner location shown on the sketch:

☐ On 5-16-90 found a 1/2" Rebar.

☒ left monument as found, ☐ lowered monument, ☐ removed monument (expl.)

☐ On _____ placed a _____

## SKETCH OF REFERENCE TIES

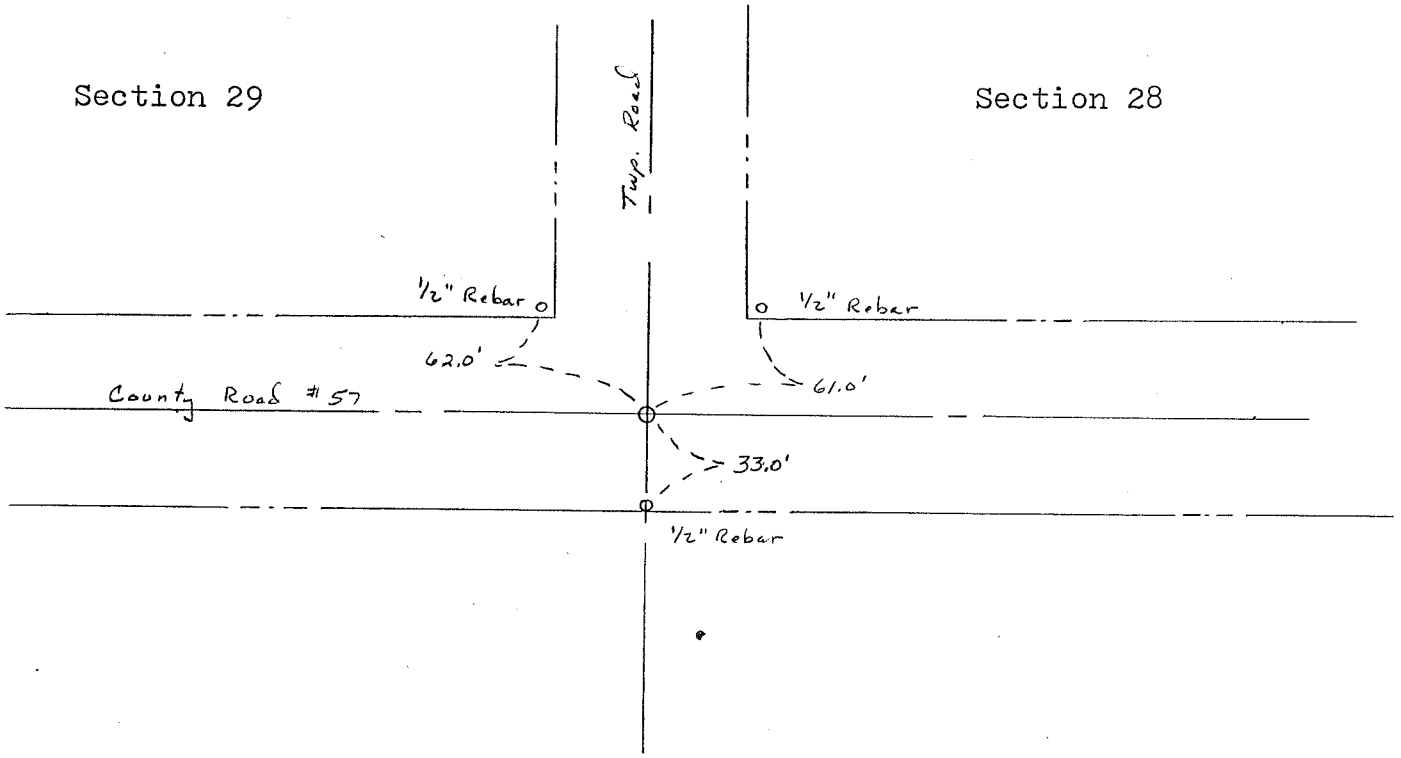


Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

Raymond M Tucker — Signature

6-25-90 — Date

Registration No. 15471

☒ Land Surveyor, ☐ Prof. Engineer

☐ County Surveyor, ☐ County Engr.

OFFICE OF THE COUNTY RECORDER
County of _____

I hereby certify that this document was filed in the County Recorders office at _____.M. on the ___ day of _____ A.D., 19____.

County Recorder _____

By _____, Deputy

DOCUMENT NO. _____

STATEMENT OF EVIDENCE:

NORTHEAST CORNER SECTION 32 - T104N - R17W

1853 - John Fitzpatrick, Deputy Surveyor, set a corner section post during the Original Public Land Survey.

1970 - Mower County Highway Department notes show reference points to corner and an inplaced concrete monument.

May 1990 - Tucker Land Surveying excavated this location and found a 1/2" Rebar. Continued to excavate to 5 feet deep and found nothing. Accepted Rebar as corner.

The above corner agrees with a electronic survey made of monuments and occupation lines in the area and is accepted as a perpetuation of the public land survey corner.

For details of the analysis and electronic survey data contact: Tucker Land SUrveying, Dexter, Minnesota 55926.