Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

NE Corner of Section 2, Township 104N Range 17W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch

☐ On 11/04/1993 (DATE) found a 3/4"X16" PIPE CAPPED RLS #14888 12"X20" LONG FIELD STONE WITH A 3/4"X18" LONG ROD

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 11/04/1993 (DATE) placed a CAPPED 5/8" IRON

SKETCH OF REFERENCE TIES

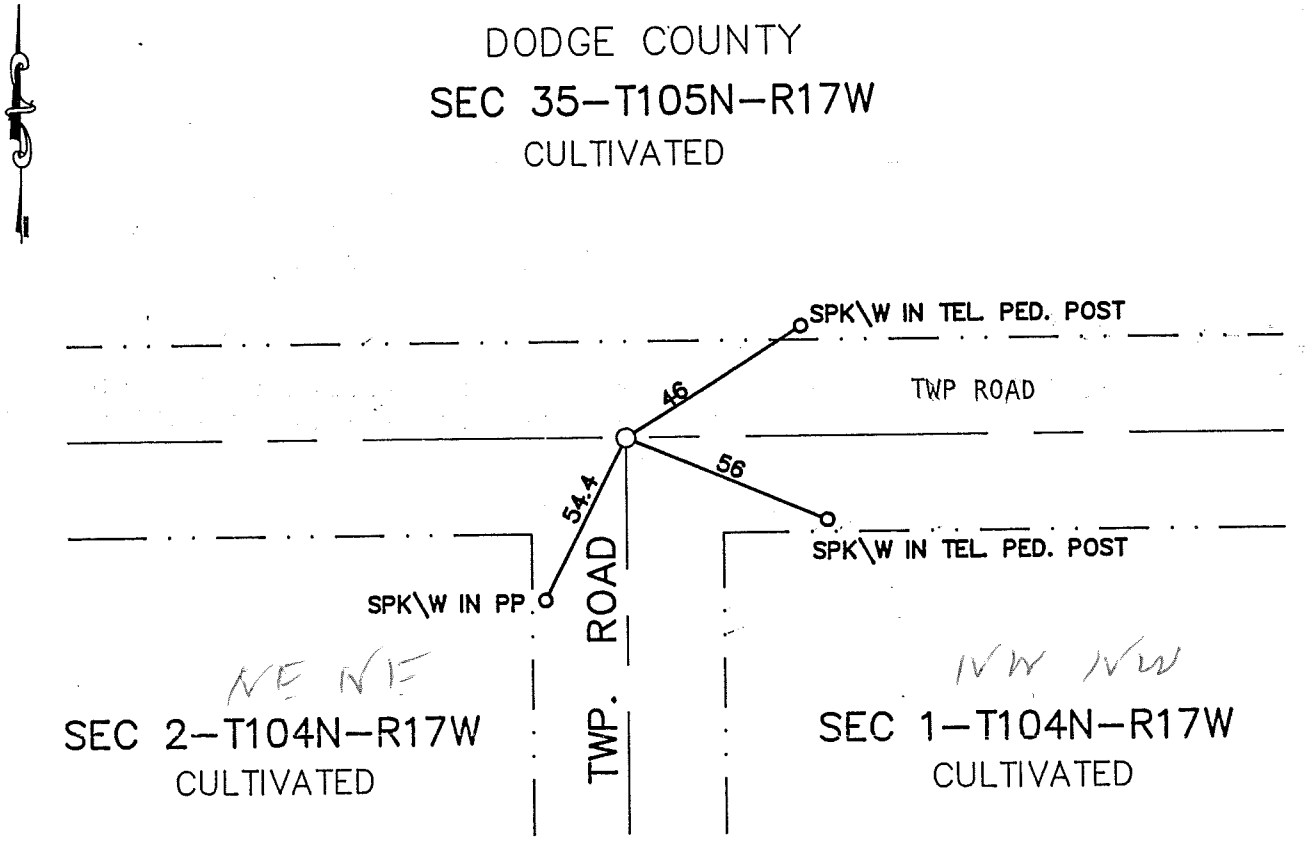

JONES, HAUGH & SMITH INC
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein were prepared by me or under my direct supervision.

SIGNATURE _____ DATE 1-30-96

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☒ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of Mower

I hereby certify that this document was filed in the County Rec. office at 3 P.M. on the 2 day of Feb A.D., 1996

COUNTY RECORDER Charles Ezzer

By Susan M. Davis, Deputy

DOCUMENT NO. 142315

M.H.D. FORM NO. 2105 BOOK 90 PAGE 164 Book 90 Misc Page 164

NE Cor SEC 2-104-17

This corner was originally established by Deputy Surveyor Elisha S. Norris of the U.S. General Land Office in 1853. The government notes show a wood post was set with mound of earth was built with a trench around.

The following were contacted for section corner information.

Mower County Highway Dept.
Mower County Recorder
Zenk Engineering
Tucker Land Surveying

No record of this corner was obtained from the above mentioned offices.

1993 Jones Haugh and Smith crew, under direction of John Schulte, Mower County Surveyor RLS 13807, dug with county backhoe at the CL of township road E-W and township road South. Found a 3/4"x16" pipe .30' deep capped RLS 14888. Continued digging to a depth of 5' and found a 12"x20" long field stone with a 3/4"x18" long rod resting on the West side of the stone. Placed a capped 5/8" iron above the field stone found.

The monument fit occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

For electronic survey data and analysis, contact the firm of Jones, Haugh and Smith Inc.

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

SE Corner of Section 2, Township T104N, Range R17W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch

☐ On 11/04/1993 (DATE) found a 12" x 12" STONE

☒ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 11/04/1993 (DATE) placed a CAST IRON MONUMENT

SKETCH OF REFERENCE TIES

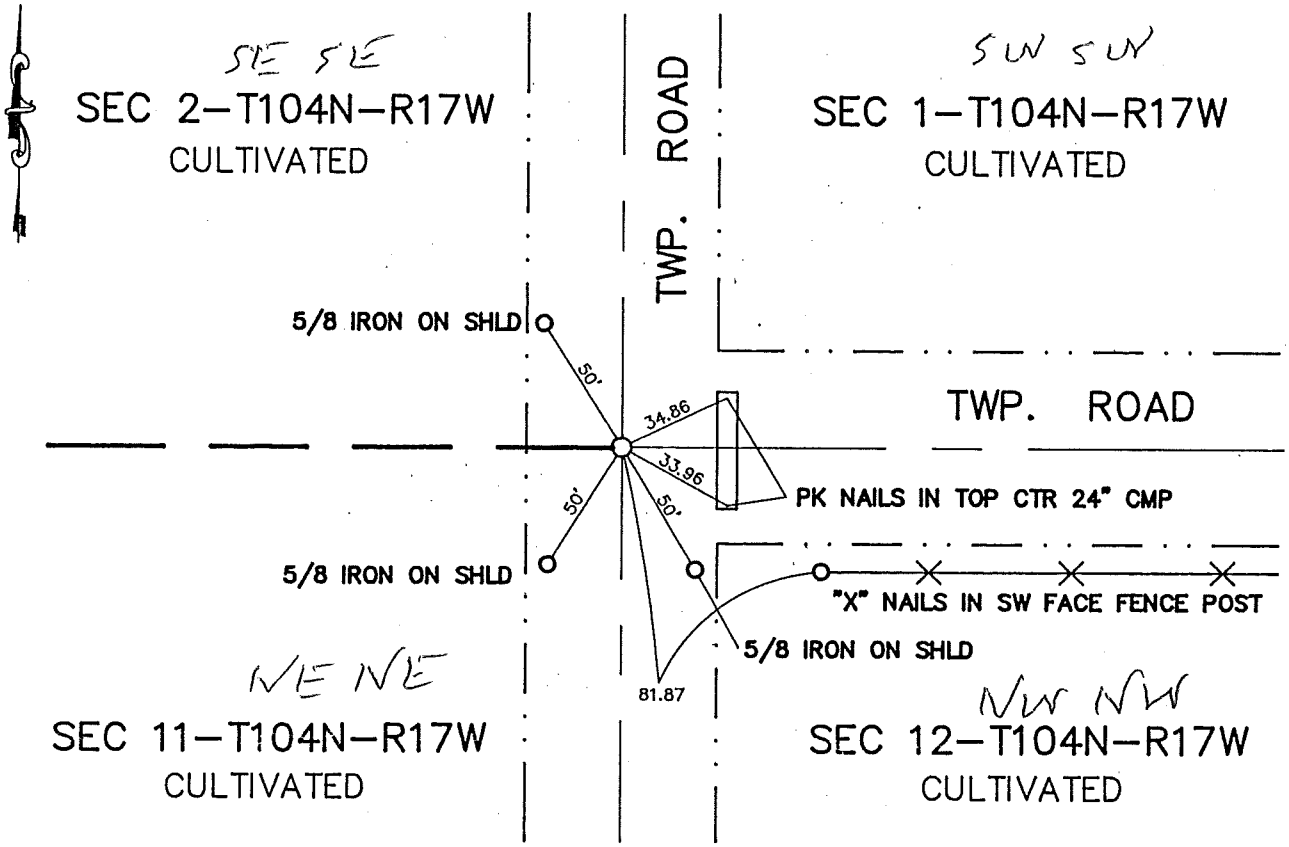

JONES, HAUGH & SMITH INC
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

BOOK 88 PAGE 67

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein were prepared by me or under my direct supervision.

SIGNATURE _____ DATE 8-7-95

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☒ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of Mower

I hereby certify that this document was filed in the County Rec. office at 4 P.M. on the 8 day of Aug A.D., 1995

COUNTY RECORDER Charles Engen
By Susan M. Davis, Deputy
DOCUMENT NO. 438497

M.H.D. FORM NO. 2105

BK 88 Misc Pg 67

SW Cor SEC 1-104-17

This corner was originally established by Deputy Surveyor John Fitzpatrick of the U.S. General Land Office in 1854. The government notes show a stone was set with a wood post and a mound of earth.

The following were contacted for section corner information.

Freeborn County Highway Dept.
Freeborn County Recorder
Zenk Engineering
Tucker Land Surveying

No record of this corner was obtained from the above mentioned offices.

1993 Jones, Haugh and Smith crew, under direction of John Schulte, Mower County Surveyor RLS 13807, dug with county backhoe on CL CL roads N-S and E, and in line with a fence to the west. Excavated a 3' X 10' X 5' deep hole and found a 12" X 12" X 10" field stone at a depth of 4.5'. The stone was in virgin soil 0.6' above the clay. Stone was accepted as true corner and a 5/8 iron was set on the south side. A CIM was set above the corner at the road surface.

The monument fit occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

For electronic survey data and analysis, contact the firm of Jones, Haugh and Smith Inc.

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

S 1/4 Corner of Section 4, Township 104N Range 17W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch

☐ On 11/04/1993 (DATE) found a 1/2" IRON AND 12"X12" STONE

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 11/04/1993 (DATE) placed a CAST IRON MONUMENT

SKETCH OF REFERENCE TIES

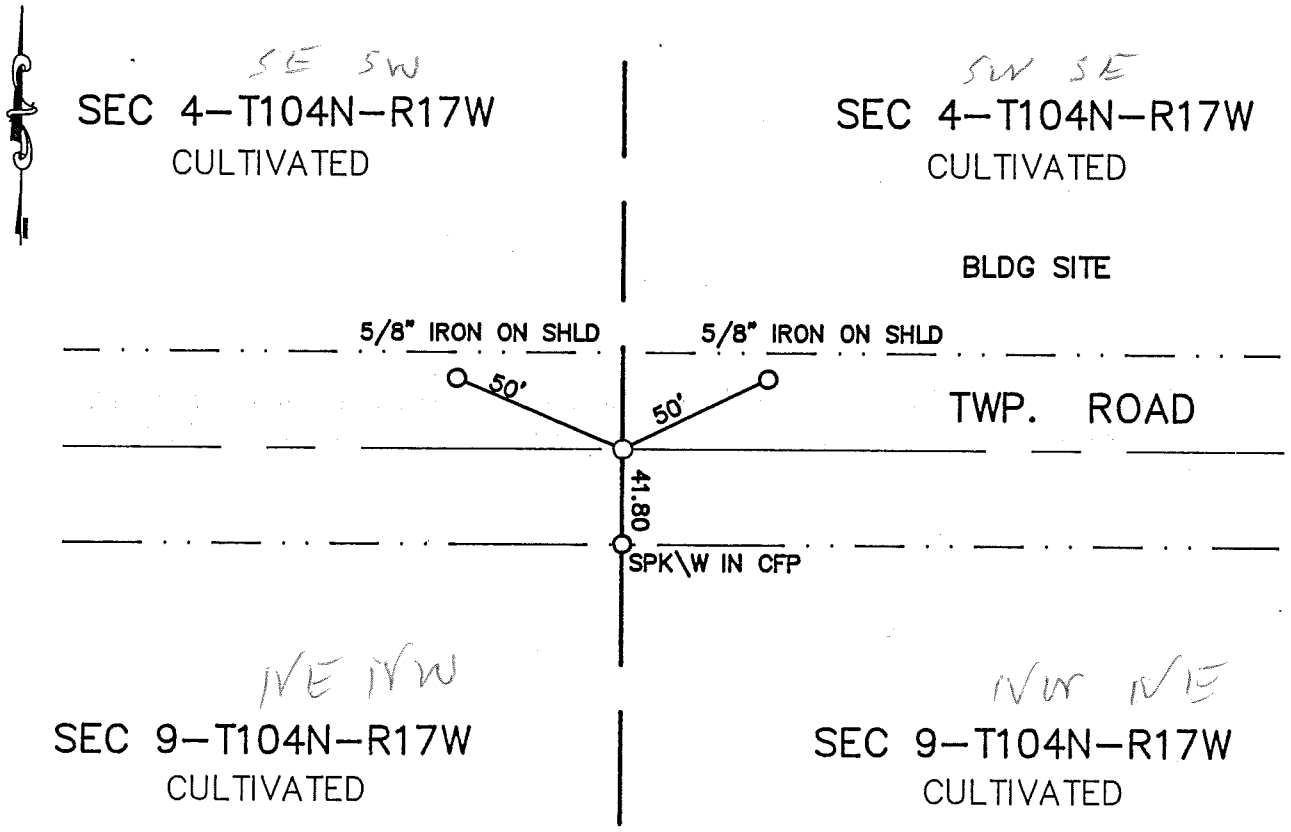

JONES, HAUGH & SMITH INC
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein were prepared by me or under my direct supervision.

SIGNATURE _____ DATE 1-30-96

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☒ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of Mower

I hereby certify that this document was filed in the County Rec. office at 3 P.M. on the 2 day of February A.D., 1996

COUNTY RECORDER Charles Enger
By Susan M. Davis, Deputy
DOCUMENT NO. 442316

M.H.D. FORM NO. 2105

BOOK 90 PAGE 166 Book 90 Misc Page 166

S 1/4 Cor SEC 4-104-17

This corner was originally established by Deputy Surveyor Elisha S. Norris of the U.S. General Land Office in 1853. The government notes show a wood post was set with a mound of earth and trench.

The following were contacted for section corner information.

Mower County Highway Dept.
Mower County Recorder
Zenk Engineering
Tucker Land Surveying

1948 Book 1 of the MHD notes show an iron pin and stone at this location.

1995 Jones, Haugh and Smith crew, under direction of John Schulte, Mower County Surveyor RLS 13807, dug with county backhoe at the CL of township road E-W and in line with line fence N-S. Found a 1/2" iron and a 12"x12" stone at a depth of 2' which was below virgin soil. Left monuments as found and placed a cast iron monument above the monuments found.

The monument fit occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

For electronic survey data and analysis, contact the firm of Jones, Haugh and Smith Inc.

Index No. _____ P128

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

SE Corner of Section 5, Township 104N Range 17W, 5TH P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch:

☐ On 6-7-93 (DATE) found a 6"ø CONC MONUMENT WITH IRON IN CNT

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 6-7-93 (DATE) placed a CAST IRON MONUMENT

SKETCH OF REFERENCE TIES

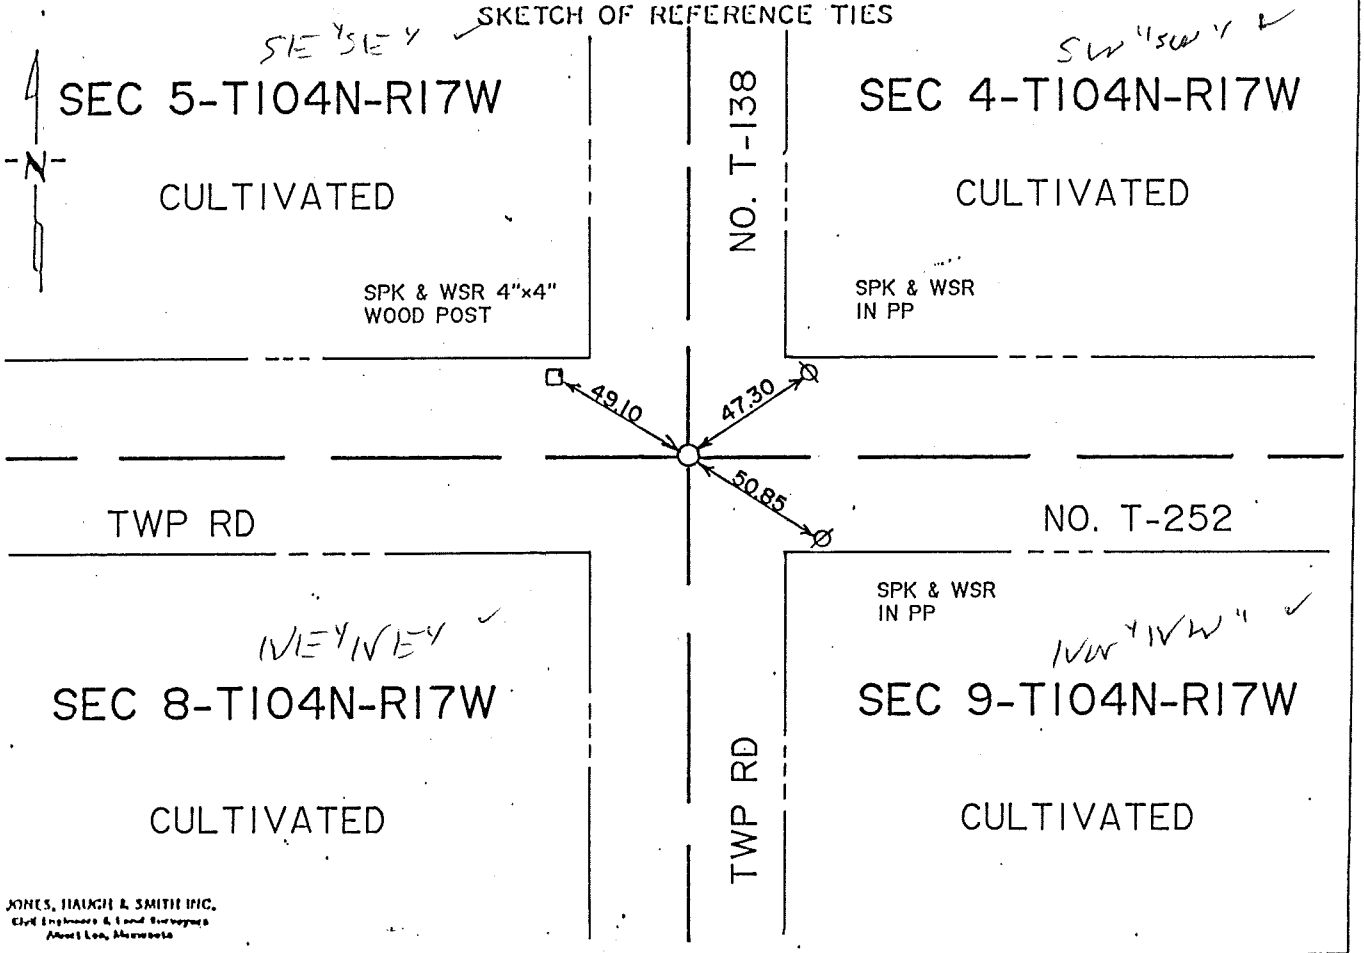

JONES, HAUGH & SMITH INC.
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

SIGNATURE _____ DATE 7-26-93

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☒ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of Mower

I hereby certify that this document was filed in the County Rec. office at 2 P.M. on the 28 day of July A.D., 1993

COUNTY RECORDER Thanda Enger

By Marlene Martin, Deputy

DOCUMENT NO. 422592

Bk 80 Misc P. 396

MLD FORM NO. 2105 BOOK 80 PAGE 396

STATEMENT OF EVIDENCE

SE cor Sec 5-104-17

This corner was originally established by Deputy Surveyor John Fitzpatrick of the U.S. General Land Office in 1853. The government notes show a wood post and stone were set with a mound of earth and trench.

The following were contacted for section corner information:
Mower County Highway Department
Mower County Recorder
Zenk Engineering
Tucker Land Surveying

The following information was obtained to support evidence of a perpetuation of the original public land survey corner.

1890 Clausen, Mower County Surveyor, notes indicate a government post at this corner.

1948 Mower County Highway Department Book 1, indicates a concrete monument 18" below road surface. The following ties were taken:
58.6' NW to 2nd fence post west - north side of road
70.7' NW to 3rd fence post west - north side of road
69.3' SW to 3rd fence post west - south side of road
34.7' SW to south end of culvert
58.7' SW to 2nd fence post south - west side of road
53.0' SE to 3rd fence post south - east side of road
59.8' SE to 3rd fence post east - south side of road

1993 Jones, Haugh & Smith Inc crew under the direction of John H. Schulte IV, RLS 13807, dug with the county backhoe a 5'x4'x12' long hole on the centerline centerline of the east-west and north-south township roads using only tie left from 1948 County notes. We found a 6" diameter concrete monument with an iron in center at a depth of four feet. Therefore we accepted concrete monument found as perpetuation of the original public land survey corner and set a cast iron monument near road surface above concrete monument found.

The monument set fits occupation lines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

BOOK 80 PAGE 397

P.60

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

S1/4 Corner of Section 5, Township 104N Range 17W, 5TH P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch:

☐ On 6-7-93 (DATE) found a 8" x 20" LONG FIELD STONE

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 6-7-93 (DATE) placed a 5/8"ø x 16" IRON CAPPED RLS NO. 13807 AND A CIM

SKETCH OF REFERENCE TIES

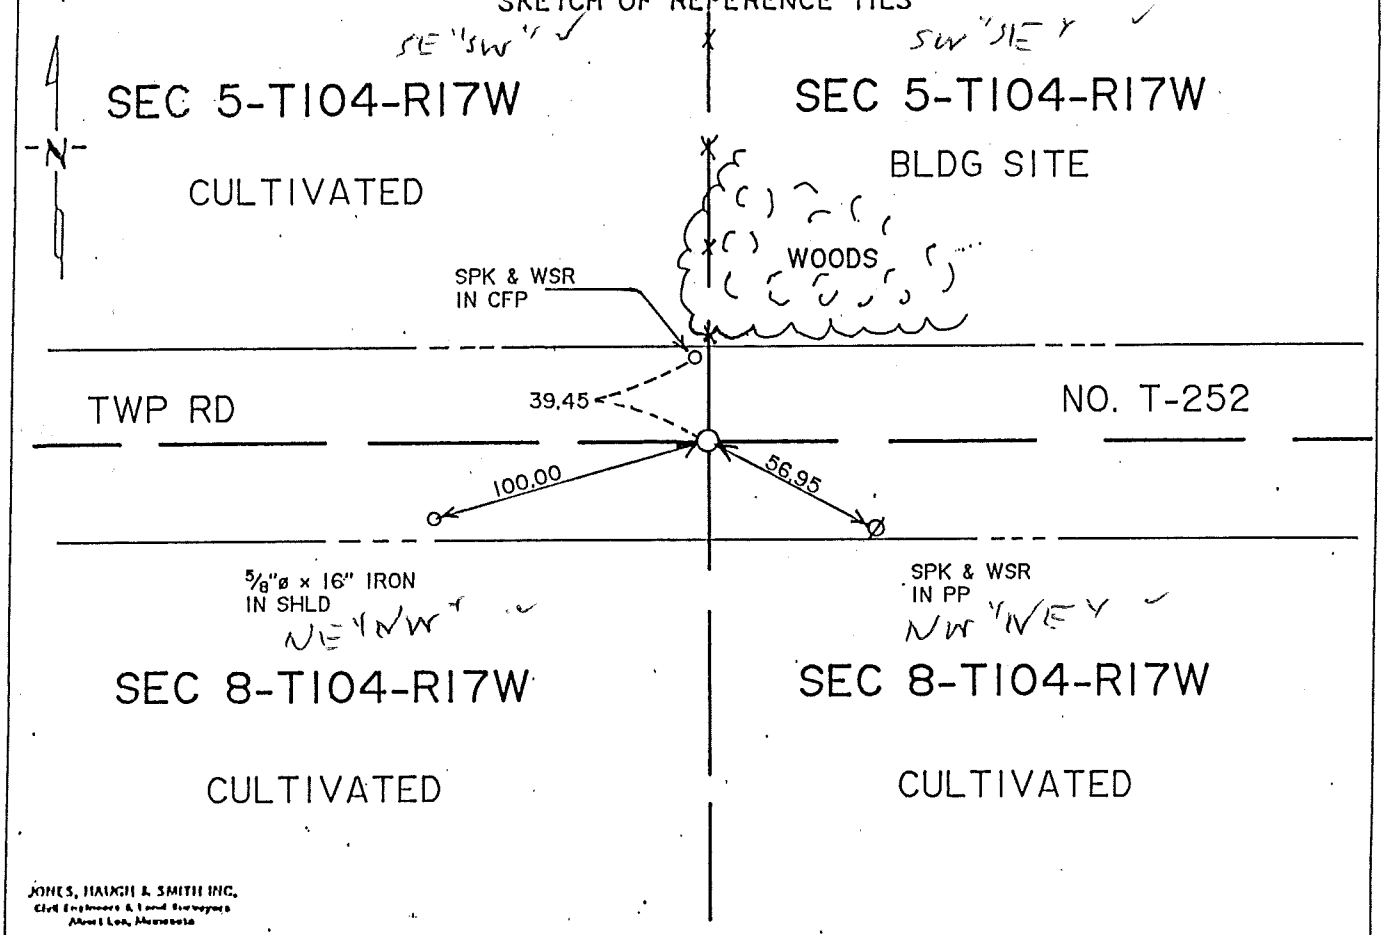

JONES, HAUGH & SMITH INC.
Civil Engineers & Land Surveyors
Mont Lea, Minnesota

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

SIGNATURE _____ DATE 7-26-93

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☒ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of Mower

I hereby certify that this document was filed in the County Rec. office at 3 P .M. on the 28 day of July A.D., 1993

COUNTY RECORDER Charles Emerson

By Marlene Martin, Deputy

DOCUMENT NO. 122530 Bk 80 Mtgs Pg. 392

MILD FORM NO. 2105 BOOK 80 PAGE 392

STATEMENT OF EVIDENCE

S 1/4 cor Sec 5-104-17

This corner was originally established by Deputy Surveyor John Fitzpatrick of the U.S. General Land Office in 1853. The government notes show a wood post and stone were set with a mound of earth and trench.

The following were contacted for section corner information:
Mower County Highway Department
Mower County Recorder
Zenk Engineering
Tucker Land Surveying

The following information was obtained to support evidence of a perpetuation of the original public land survey corner.

1890 Clausen, Mower County Surveyor, notes indicate a government post at this corner.

1993 Jones, Haugh & Smith Inc crew under the direction of John H. Schulte IV, RLS 13807, dug with the county backhoe a 5'x5'x10' long hole on the centerline of the east-west township road and in line with fence running north. At a depth of four feet we found a 8" diameter x 20" long field stone resting at virgin soil depth and also in line with fence and centerline of the township road. We continued digging into clay soil and found no evidence of the wood stake placed in 1853. Therefore we accepted stone found as the perpetuation of the original public land survey corner and placed a 5/8" diameter x 16" iron capped RLS 13807 on east side of stone and a cast iron monument near road surface and above stone found.

The monument set fits occupation lines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

P. 60

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

N1/4 Corner of Section 5, Township 104N Range 17W, 5TH P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch:

☐ On 6-7-93 (DATE) found a 10" x 24" LONG FIELD STONE

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 6-7-93 (DATE) placed a 5/8"ø x 16" IRON AND A CAST MONUMENT

SKETCH OF REFERENCE TIES

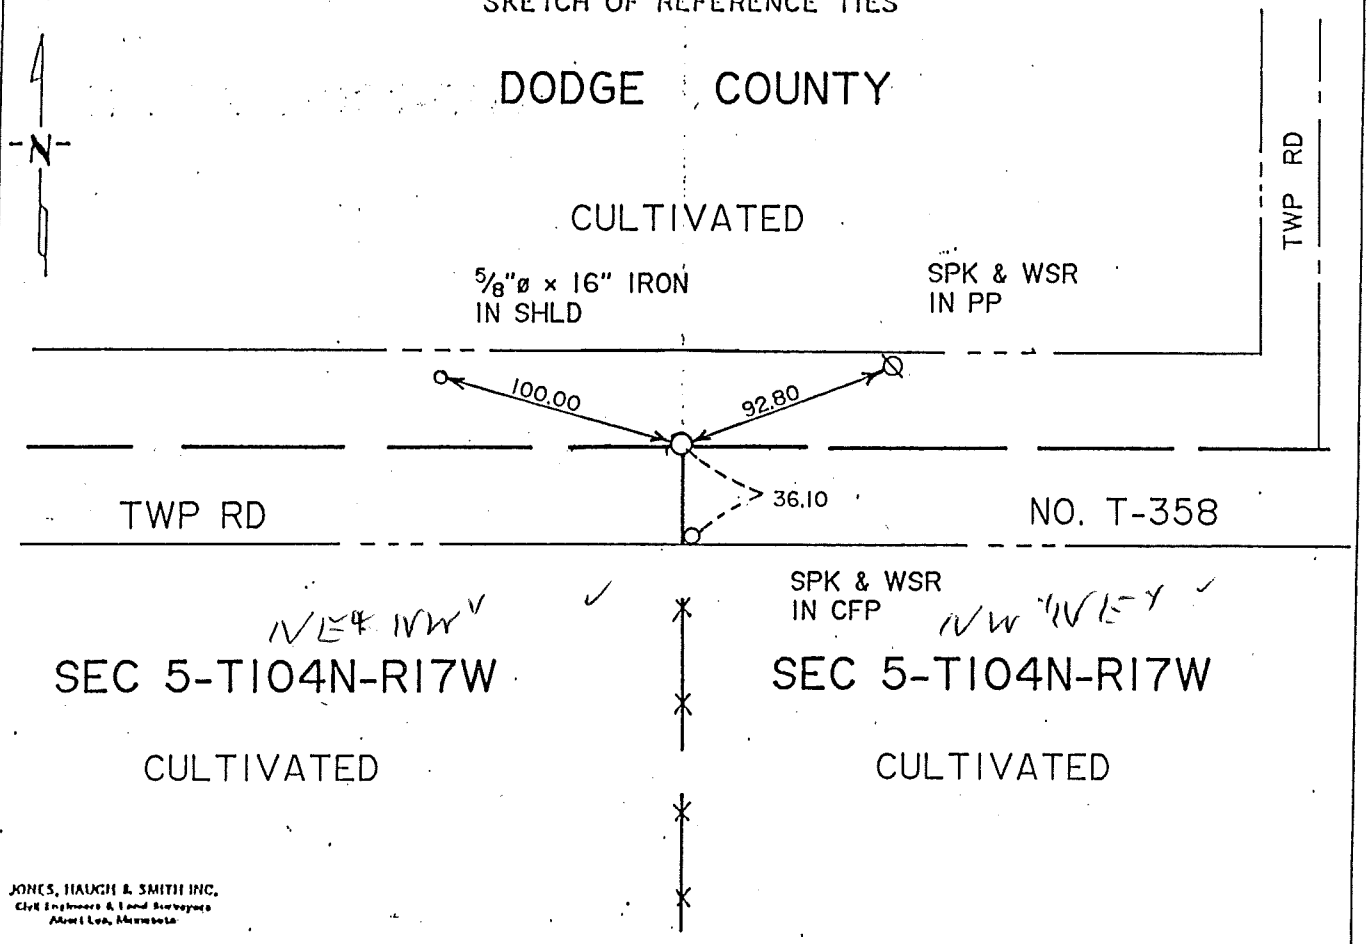

JONES, HAUGH & SMITH INC.
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

SIGNATURE _____ DATE 7-26-93

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☒ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of Mower

I hereby certify that this document was filed in the County Rec. office at 8 A.M. on the 28 day of July A.D., 1993

COUNTY RECORDER Grandon Enger

By Marlene Martin, Deputy

DOCUMENT NO. 122591

Bk 80 Misc Pg 394

MLD. FORM NO. 2105 BOOK 80 PAGE 394

STATEMENT OF EVIDENCE

N 1/4 cor Sec 5-104-17

This corner was originally established by Deputy Surveyor Elisha S. Norris of the U.S. General Land Office in 1853. The government notes show a wood post was set with a mound of earth and trench.

The following were contacted for section corner information:
Mower County Highway Department
Mower County Recorder
Zenk Engineering
Tucker Land Surveying

The following information was obtained to support evidence of a perpetuation of the original public land survey corner.

1890 Clausen, Mower County Surveyor, notes indicate a government post at this corner.

1993 Jones, Haugh & Smith Inc crew under the direction of John H. Schulte IV, RLS 13807, dug with the county backhoe a 5'x3'x12' long hole on the centerline of the east-west township road and in line with fence running south. We found a 10" diameter x 24" long pointed field stone at a depth of 2.4 feet which rested in virgin soil and also in line with fence running south and centerline of township road. We continued digging to clay soil and found no evidence of the original public land survey corner. Therefore we accepted stone found as the perpetuation of the original public land survey corner and placed a cast iron monument near road surface above stone found.

The monument set fits occupation lines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

see p60

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

N1/4 Corner of Section 6, Township 104N Range 17W, 5TH P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch:

☐ On 9-3-93 (DATE) found a NOTHING

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 9-3-93 (DATE) placed a CAST IRON MONUMENT

SKETCH OF REFERENCE TIES

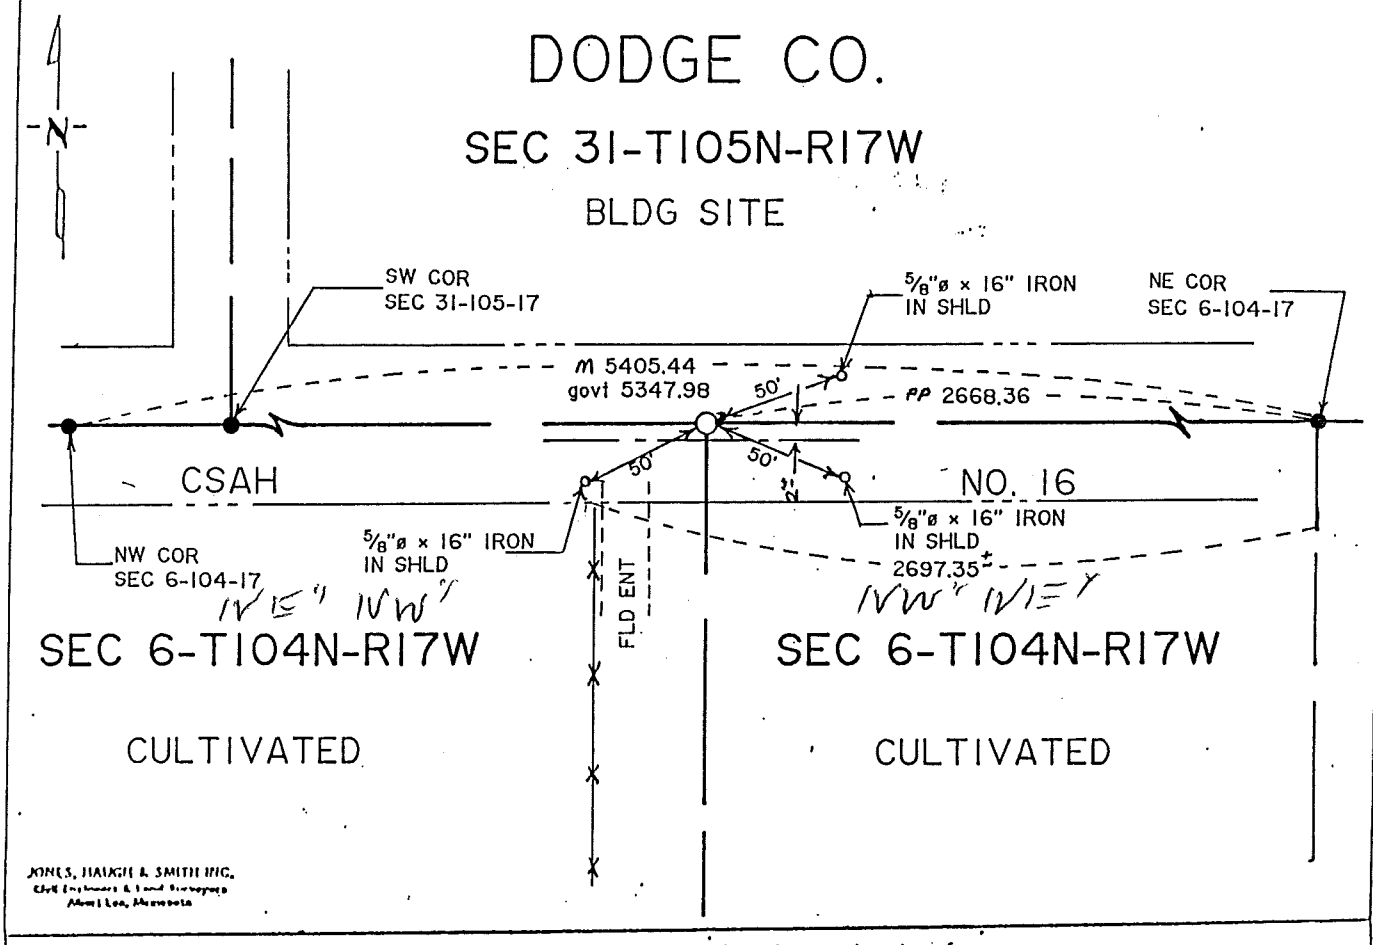

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

SIGNATURE _____ DATE 9-30-93

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☒ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER

County of Mower

I hereby certify that this document was filed in the County Rec. office at 4 A .M. on the 1 day of October A.D., 1993

COUNTY RECORDER Charles Engee

By Marlene Martin, Deputy

DOCUMENT NO. 423993

Bk 81 Misc. Pg. 175

Book 81 PAGE 175

M.H.D. FORM NO. 2105

STATEMENT OF EVIDENCE

N 1/4 corner Section 6-104-17

This corner was not set by Deputy Surveyor Elisha S. Norris of the U.S. General Land Office in 1853.

The following were contacted for section corner information:
Mower County Highway Department
Mower County Recorder
Zenk Engineering
Tucker Land Surveying

The following information was obtained to support evidence of a perpetuation of the original public land survey corner.

1853 This corner was not set on the original public land corner survey.

1945 Mower County Highway Department Road Plans for County State Aid Highway No. 16 or survey records show no information of this corner ever being set.

1993 Jones, Haugh & Smith Inc crew under the direction of John H. Schulte IV, Reg. No. 13807, set this corner using public land survey restoration methods. We measured the distance between the northeast corner and northwest corner of the section and set a cast iron monument at a proportional distance near road surface on a straight line between the northeast corner of Section 6 and the southwest corner of Section 31-105-17, Dodge County.

BOOK 81 PAGE 176

Index No. _____ "U" P.60

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

NE Corner of Section 6, Township 104N Range 17W, 5TH P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch:

☐ On 9-3-93 (DATE) found a 5/8"ø x 16" IRON CAPPED RLS NO. 13807 OVER A 6"ø CONC. MONUMENT WITH 1/2"ø IRON IN CENTER

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 9-3-93 (DATE) placed a LEFT MONUMENT AS FOUND

SKETCH OF REFERENCE TIES

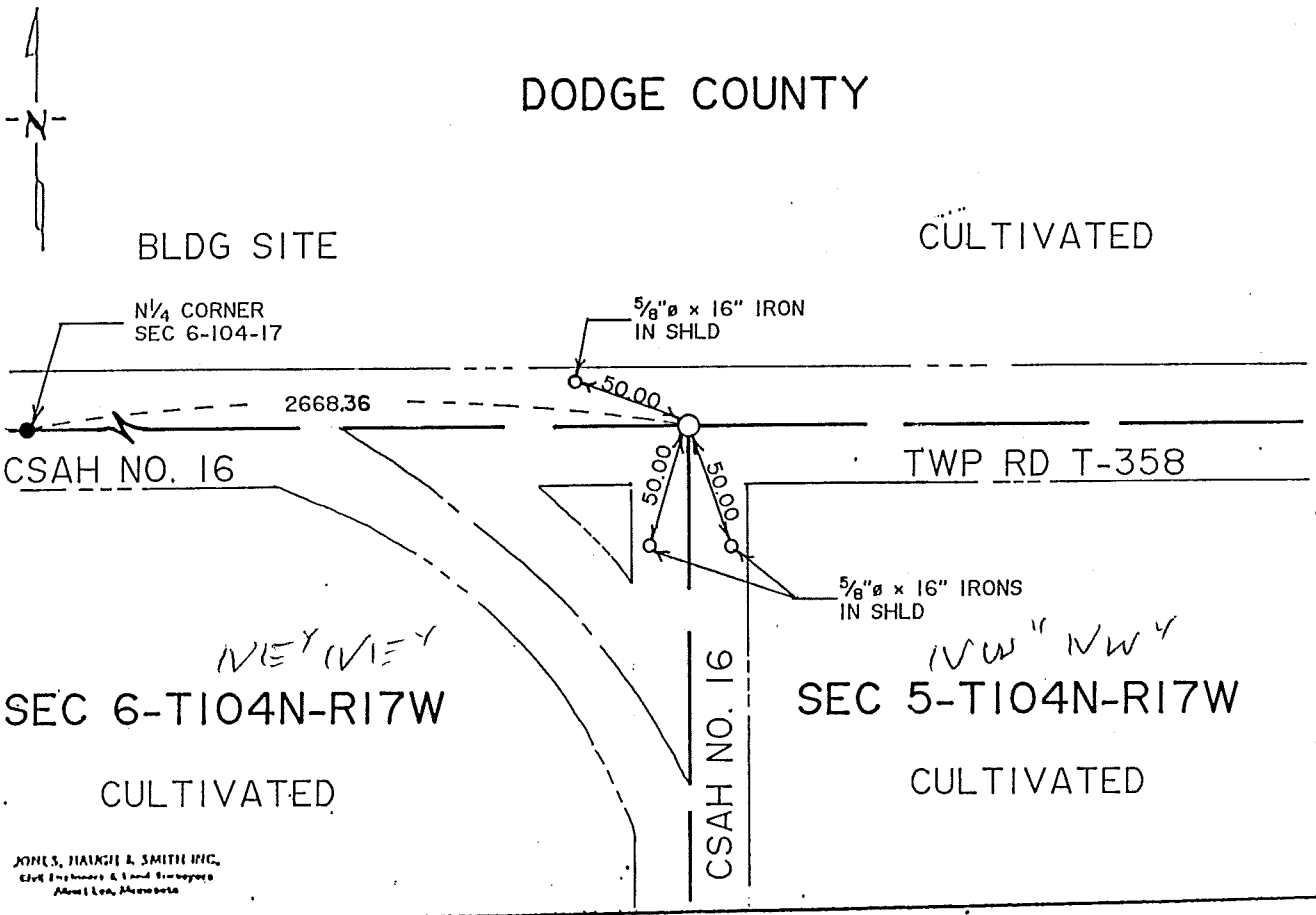

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

SIGNATURE _____ DATE 9-30-93

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☒ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER

County of Mower

I hereby certify that this document was filed in the County Rec. office at 11 A.M. on the 1 day of October A.D., 19 93

COUNTY RECORDER Chandler Engen

By Marlene Marton, Deputy

DOCUMENT NO. 423994

By St of Misc. Pg. 177

M.H.D. FORM NO. 2105

BOOK R1 PAGE 177

STATEMENT OF EVIDENCE

NE corner Section 6-104-17

This corner was originally established by Deputy Surveyor Elisha S. Norris of the U.S. General Land Office in 1853. The government notes show a wood post and stone were set with a mound of earth and trench.

The following were contacted for section corner information:
- Mower County Highway Department
- Mower County Recorder
- Zenk Engineering
- Tucker Land Surveying

The following information was obtained to support evidence of a perpetuation of the original public land survey corner.

1890 Clausen, Mower County Surveyor, notes indicate a post at this location.

1925 Mower County Highway Department Road Plans indicate this corner would be resting in pond.

1945 Mower County Highway Department Road Plans indicate a corner monument inplace at this corner.

1993 Jones, Haugh & Smith Inc crew under the direction of John H. Schulte IV, Reg. No. 13807, dug a hole 2.5 feet deep and found a 6" diameter concrete monument with 1/2" diameter iron in center. Monument found has been accepted on the section corner for 45 years more or less, therefore we left monument as found and set a 5/8" diameter x 16" iron capped RLS 13807 near road surface above monument found.

The monument set fits occupation lines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

BOOK 81 PAGE 172

Index No. P60,188 "W"

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

SE Corner of Section 6, Township 104N, Range 17W, 5TH P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch:

☐ On 9-2-93 (DATE) found a 6"ø x 18"ø CONC MONUMENT

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 9-2-93 (DATE) placed a 5/8"ø x 16" IRON CAPPED RLS NO. 13807

SKETCH OF REFERENCE TIES

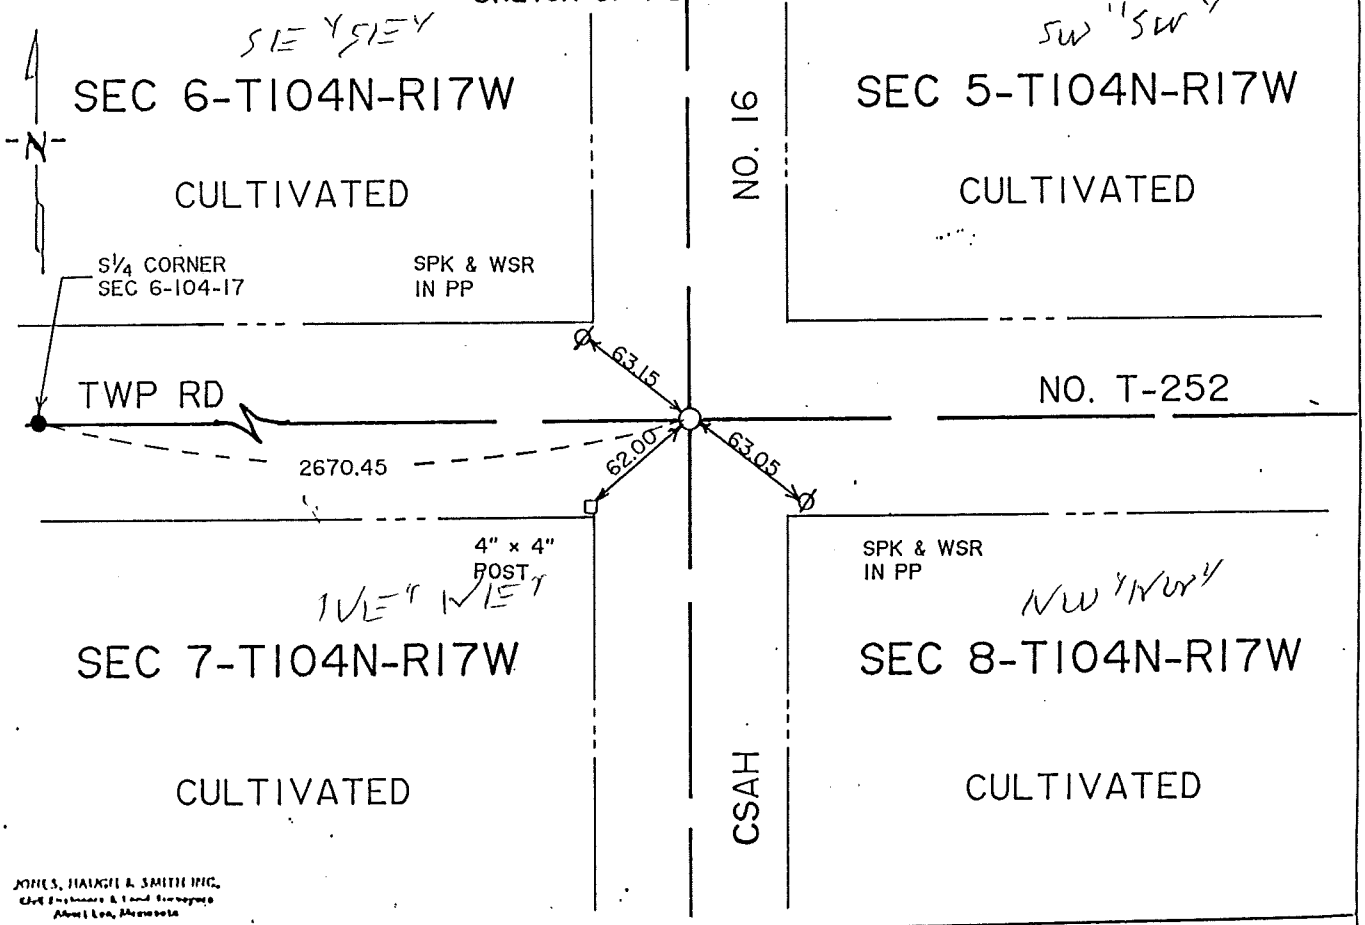

JONES, HAUGE & SMITH INC.
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

SIGNATURE _____ DATE 9-20-93

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☑ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of Mower

I hereby certify that this document was filed in the County Rec. office at 2 P .M. on the 27 day of Sept A.D., 1993

COUNTY RECORDER Charles Engar

By Marlene Martin, Deputy

DOCUMENT NO. 423944

Bk 81 Misc Pg 168

M.H.D. FORM NO. 2105

BOOK 81 PAGE 168

STATEMENT OF EVIDENCE

SE corner Section 6-104-17

This corner was originally established by Deputy Surveyor John Fitzpatrick of the U.S. General Land Office in 1853. The government notes show a wood post and stone were set with a mound of earth and trench.

The following were contacted for section corner information:
Mower County Highway Department
Mower County Recorder
Zenk Engineering
Tucker Land Surveying

The following information was obtained to support evidence of a perpetuation of the original public land survey corner.

1945 Mower County Highway Department Road Plans indicate a corner monument at this location.

1993 Jones, Haugh & Smith Inc crew under the direction of John H. Schulte IV, Reg. No. 13807, dug with county backhoe a 3'x8'x3' deep hole on centerline centerline of County State Aid Highway No. 16 and east-west township road and found a 8" diameter x 18" clay tile filled with concrete at a depth of two feet and on centerline centerline of said roads. Therefore we accepted concrete monument found as it has been noted as the section corner in the Mower County Road Plans of 1945. We left monument as found and placed a 5/8" diameter x 16" iron capped RLS 13807 near road surface above monument found.

The monument set fits occupation lines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

BOOK 82 PAGE 389

P120 P.60 "V" ✓

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

E1/4 Corner of Section 6, Township 104N Range 17W, 5TH P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch:

☐ On 9-2-93 (DATE) found a 12"x18" LONG STONE AND A 1/4x4" IRON STRAP WITH PIECES OF CLAY POTTERY AROUND STONE

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 9-2-93 (DATE) placed a CAST IRON MONUMENT

SKETCH OF REFERENCE TIES

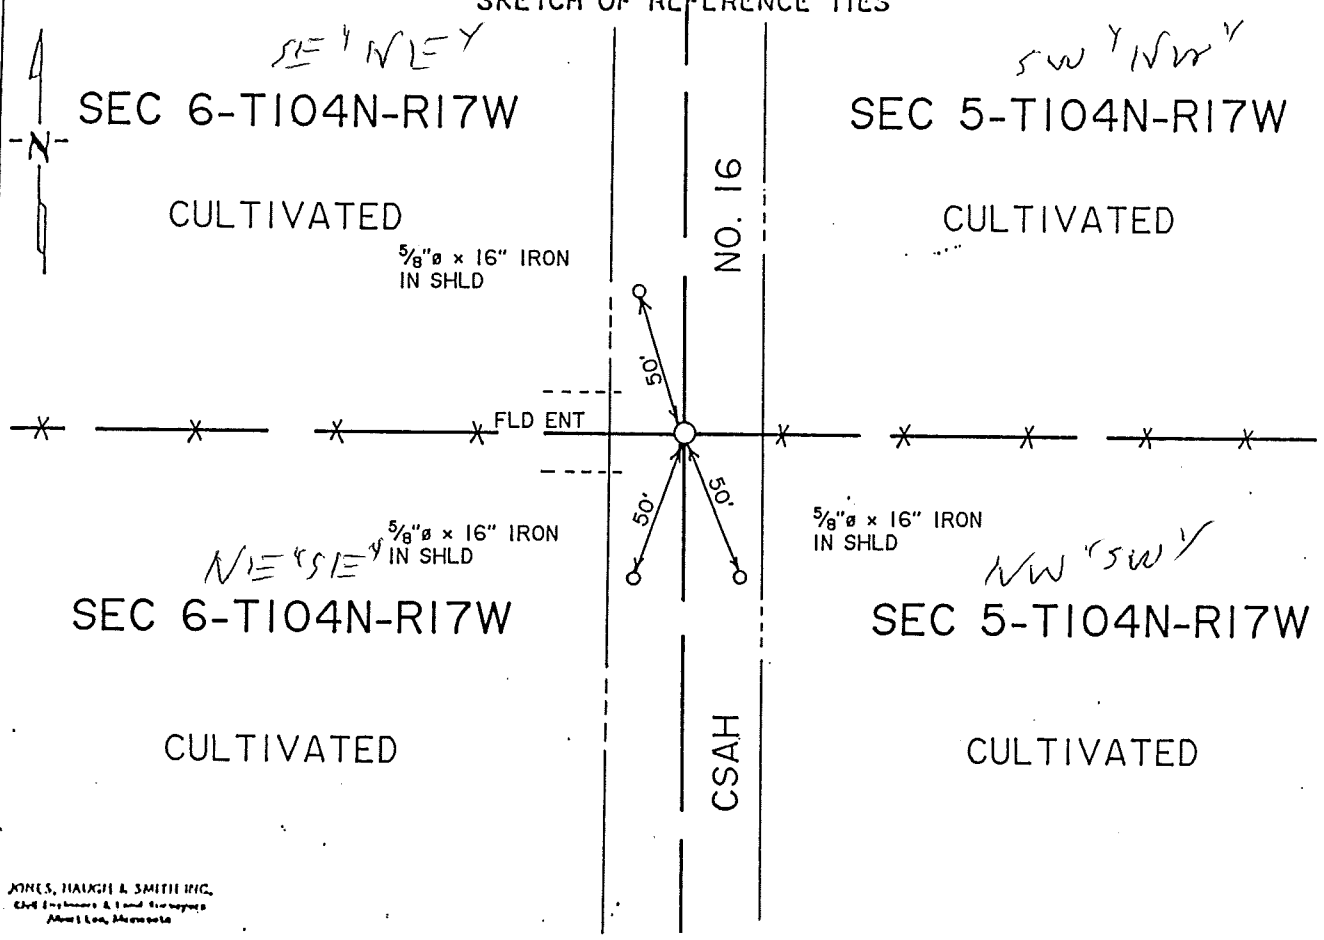

JONES, HAUGH & SMITH INC.
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

SIGNATURE _____ DATE 9-20-93

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☑ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of Mower

I hereby certify that this document was filed in the County Rec. office at 2 P.M. on the 29 day of Sept. A.D., 19 93

COUNTY RECORDER Orlando Enger

By Marlene Martin, Deputy

DOCUMENT NO. 423943

Bk 81 Misc Pg. 166

M.H.D. FORM NO. 2105

BOOK 81 PAGE 166

STATEMENT OF EVIDENCE

E 1/4 corner Section 6-104-17

This corner was originally established by Deputy Surveyor John Fitzpatrick of the U.S. General Land Office in 1853. The government notes show a wood post and stone were set with a mound of earth and trench.

The following were contacted for section corner information:
Mower County Highway Department
Mower County Recorder
Zenk Engineering
Tucker Land Surveying

The following information was obtained to support evidence of a perpetuation of the original public land survey corner.

1890 Clausen, Mower County Surveyor, notes indicate a government post at this location.

1993 Jones, Haugh & Smith Inc crew under the direction of John H. Schulte IV, Reg. No. 13807, dug with county backhoe a 4'x12'x5' deep hole on centerline of north-south County State Aid Highway No. 16 and in line with fences east and west. We found a 12" diameter x 18" long field stone tapered to a point at a depth of 4 feet which was virgin soil depth. Continued digging around stone and found pieces of old clay pottery and a 1/4" x 4" long iron strap. Continued digging below stone and found that it extended into clay soil. Therefore we left stone as found and set a 5/8" diameter x 16" iron capped RLS 13807 on the north side of stone and a cast iron monument near road surface above stone found.

The monument set fits occupation lines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

BOOK 81 PAGE 187

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

W 1/4 Corner of Section 6, Township 104N Range 17W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch

☐ On 09/02/1993 (DATE) found a STONE

☒ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 09/02/1993 (DATE) placed a CAST IRON MONUMENT

SKETCH OF REFERENCE TIES

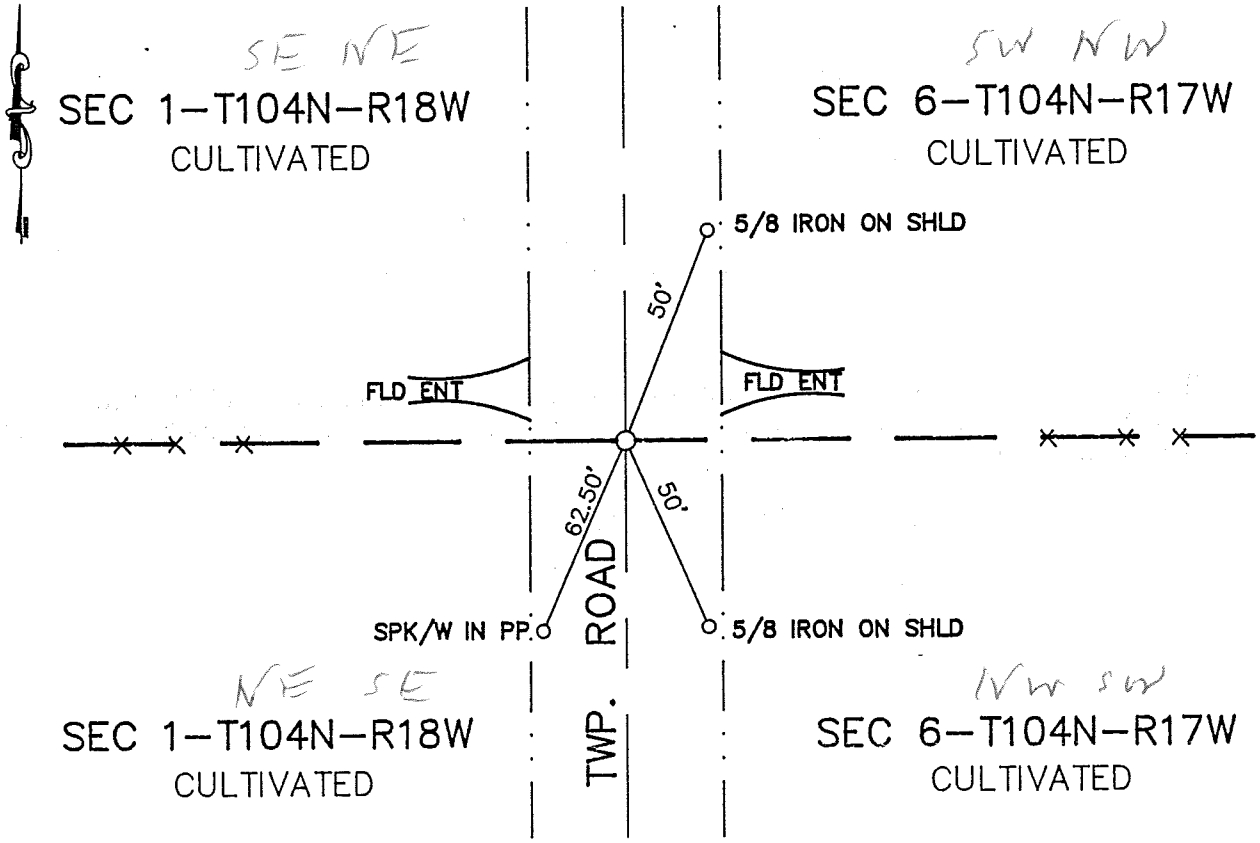

JONES, HAUGH & SMITH INC
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein were prepared by me or under my direct supervision.

_____ (SIGNATURE) 1-30-96 (DATE)

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☒ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of Mower

I hereby certify that this document was filed in the County Rec. office at 3 p .M. on the 2 day of Feb A.D., 1996

COUNTY RECORDER Charles Enger
By Susan M. Davis, Deputy
DOCUMENT NO. 142317

M.H.D. FORM NO. 2105 BOOK 90 PAGE 168 Book 90 Misc Page 168

W 1/4 Cor SEC 6-104-17

This corner was originally established by Deputy Surveyor Elisha S. Norris of the U.S. General Land Office in 1853. The government notes show a wood post was set with mound of earth was built with a trench around.

The following were contacted for section corner information.

Mower County Highway Dept.
Mower County Recorder
Zenk Engineering
Tucker Land Surveying

No record of this corner was obtained from the above mentioned offices.

1993 Jones Haugh and Smith crew, under direction of John Schulte, Mower County Surveyor RLS 13807, dug with county backhoe at the CL of township road N-S and at a distance of 2640'+- North of the SW corner of section 6 and found a 2'x2'x1' thick, flat field stone at a depth of 2'. Continued digging and found no other evidence of corner. Left stone as found and placed a cast iron monument above the stone found.

The monument fit occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

For electronic survey data and analysis, contact the firm of Jones, Haugh and Smith Inc.

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

NW Corner of Section 6, Township 104N Range 17W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch

☐ On 09/02/1993 (DATE) found a CONCRETE TILE MONUMENT WITH 5/8" IRON IN THE CENTER

☒ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 09/02/1993 (DATE) placed a CAST IRON MONUMENT

SKETCH OF REFERENCE TIES

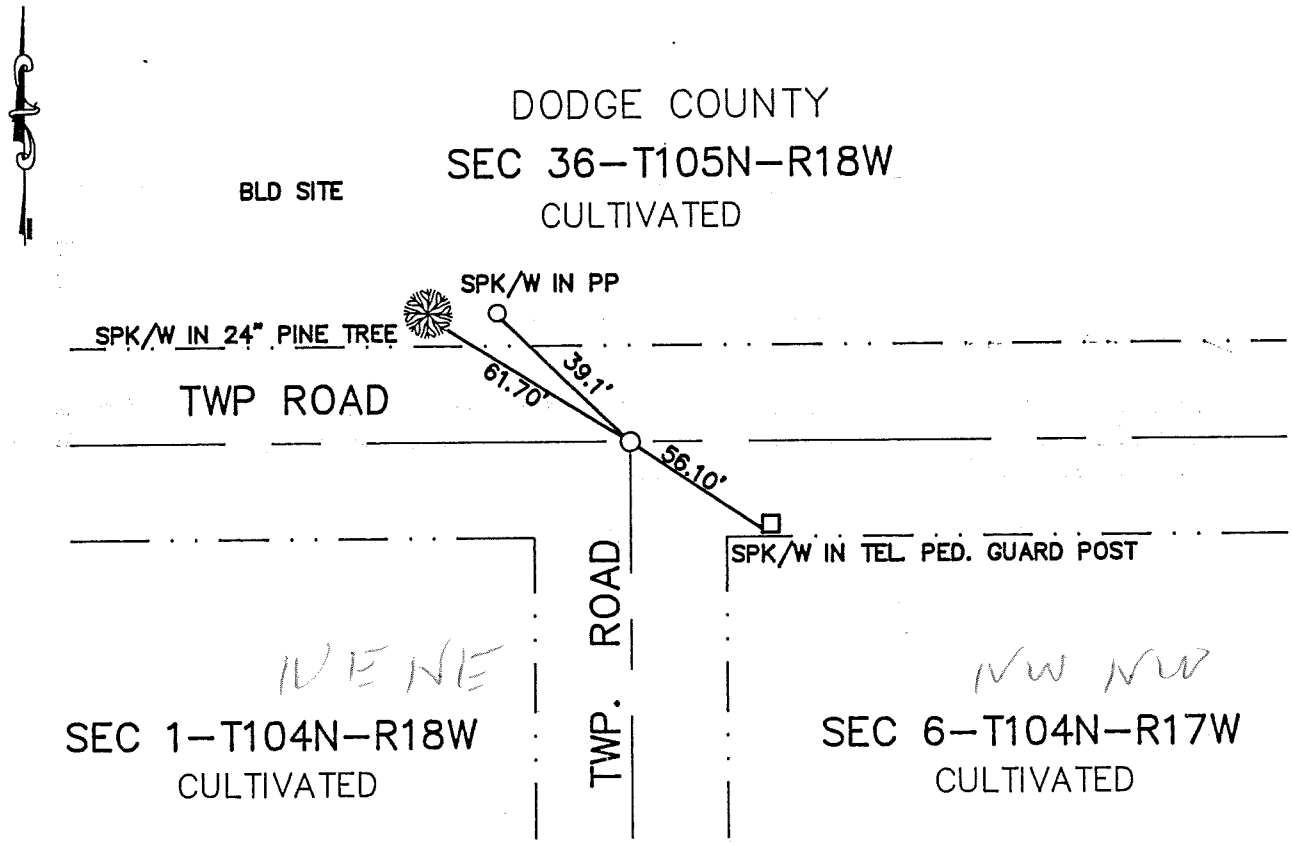

JONES, HAUGH & SMITH INC
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein were prepared by me or under my direct supervision.

[signature] SIGNATURE 1-30-96 DATE

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☒ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of Mower

I hereby certify that this document was filed in the County Rec. office at 3 p .M. on the 2 day of Feb A.D., 1996

COUNTY RECORDER Charles Enger

By Susan M. Davis, Deputy

DOCUMENT NO. 142318

M.H.D. FORM NO. 2105 BOOK 90 PAGE 170 Book 90 Misc Page 170

NW Cor SEC 6-104-17

This corner was originally established by Deputy Surveyor Elisha S. Norris of the U.S. General Land Office in 1853. The government notes show a charred stake was set with mound of earth was built with a trench around.

The following were contacted for section corner information.

Mower County Highway Dept.
Mower County Recorder
Zenk Engineering
Tucker Land Surveying

Book A of the MCHD notes show a concrete monument 1' below the surface.

1993 Jones Haugh and Smith crew, under direction of John Schulte, Mower County Surveyor RLS 13807, dug with county backhoe at the CL of township road E-W and township road South which agreed with the only tie left noted in the MCHD records. We then found a 6"x18" concrete tile monument with an iron in the center at a depth of 2.5'. Left monument as found and placed a cast iron monument above the monument found.

The monument fit occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

For electronic survey data and analysis, contact the firm of Jones, Haugh and Smith Inc.

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

S 1/4 Corner of Section 6, Township 104N Range 17W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch

☐ On 09/03/1993 (DATE) found a _____

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 09/03/1993 (DATE) placed a CAST IRON MONUMENT

SKETCH OF REFERENCE TIES

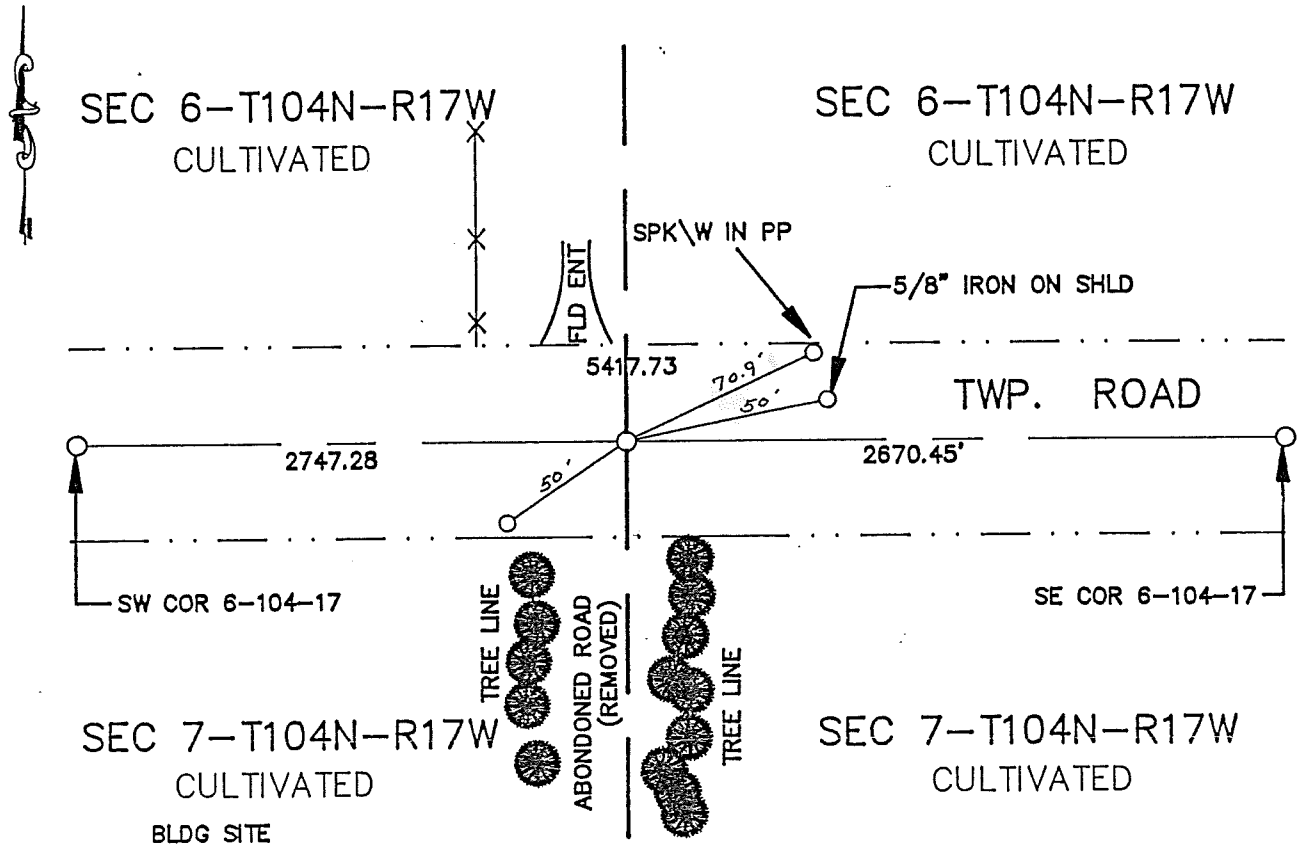

JONES, HAUGH & SMITH INC
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein were prepared by me or under my direct supervision.

_____ 1-26-96
SIGNATURE DATE

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☒ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of _____

I hereby certify that this document was filed in the County Rec. office at _____ .M. on the _____ day of _____ A.D., 19___

COUNTY RECORDER _____

By _____, Deputy

DOCUMENT NO. _____

M.H.D. FORM NO. 2105

S 1/4 Cor SEC 6-104-17

This corner was originally established by Deputy Surveyor John Fitzpatrick of the U.S. General Land Office in 1853. The government notes show a wood post was set with a mound of earth and trench.

The following were contacted for section corner information.

Mower County Highway Dept.
Mower County Recorder
Zenk Engineering
Tucker Land Surveying

1882 M.N. Claussen, Mower County Surveyor, placed a stone on a straight line between NW and NE corners of section 7.

1993 Jones, Haugh and Smith crew, under direction of John Schulte, Mower County Surveyor RLS 13807, dug with county backhoe at the CL of township road E-W and in line with line fence North. Dug to clay and found no evidence of corner. We then measured Claussen distance of 2671.68' from the SE corner of section 6 and found this point to be 30'+- East of fence line to the North but in line with CL of old road bed south, we then dug a 5'x15'x6' deep hole on the CL of E-W township road at this location and found no evidence of corner. We also dug a 4'x12'6' deep hole on a straight line between the SW and SE corners of section 6 at the Claussen's distance from the SE corner and found no evidence of corner. We then placed a cast iron monument on a straight line between the SW and SE corners at a proportional part distance in accordance with PLS rules the distance to the SE corner was found to be 2670.45 vs. Claussen 2671.68 and the distance to the SW corner was found to be 2747.28 vs. Claussen 2746.92. CIM is 7+- South of township road CL. This location is in accordance with Claussen's record for the S 1/4 corner.

The monument fit occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

For electronic survey data and analysis, contact the firm of Jones, Haugh and Smith Inc.

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

S 1/4 Corner of Section 6, Township 104N Range 17W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch

☐ On 09/03/1993 (DATE) found a _____

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 09/03/1993 (DATE) placed a CAST IRON MONUMENT

SKETCH OF REFERENCE TIES

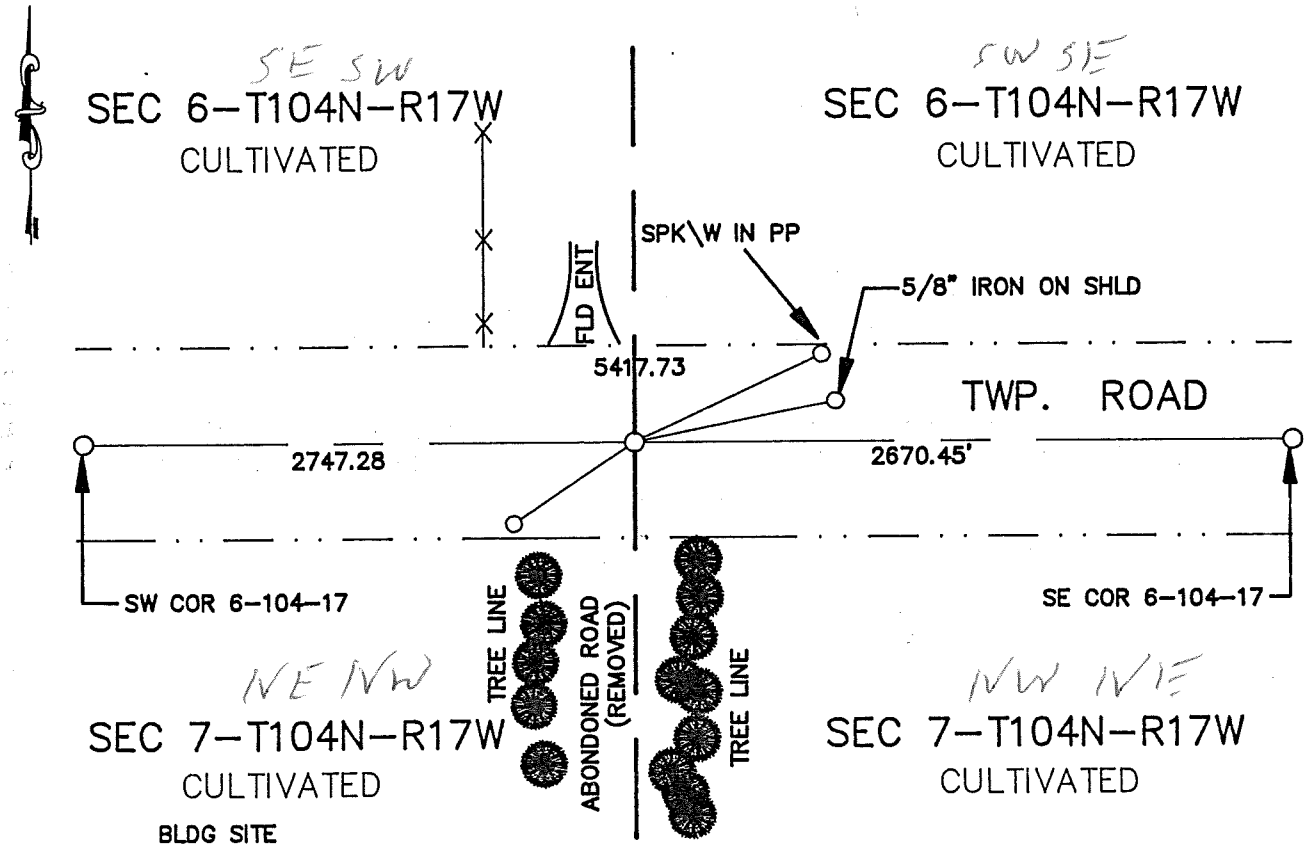

JONES, HAUGH & SMITH INC
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein were prepared by me or under my direct supervision.

_____ (SIGNATURE) 1-30-96 (DATE)

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☒ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of Mower

I hereby certify that this document was filed in the County Rec. office at 3p .M. on the 2 day of Feb A.D., 1996

COUNTY RECORDER Charles Engen

By Susan M. Davis, Deputy

DOCUMENT NO. 442319

M.H.D. FORM NO. 2105 BOOK 90 PAGE 172 Book 90 Misc Page 172

S 1/4 Cor SEC 6-104-17

This corner was originally established by Deputy Surveyor John Fitzpatrick of the U.S. General Land Office in 1853. The government notes show a wood post was set with a mound of earth and trench.

The following were contacted for section corner information.

Mower County Highway Dept.
Mower County Recorder
Zenk Engineering
Tucker Land Surveying

1882 M.N. Claussen, Mower County Surveyor, placed a stone on a straight line between NW and NE corners of section 7.

1993 Jones, Haugh and Smith crew, under direction of John Schulte, Mower County Surveyor RLS 13807, dug with county backhoe at the CL of township road E-W and in line with line fence North. Dug to clay and found no evidence of corner. We then measured Claussen distance of 2671.68' from the SE corner of section 6 and found this point to be 30'+- East of fence line to the North but in line with CL of old road bed south, we then dug a 5'x15'x6' deep hole on the CL of E-W township road at this location and found no evidence of corner. We also dug a 4'x12'6' deep hole on a straight line between the SW and SE corners of section 6 at the Claussen's distance from the SE corner and found no evidence of corner. We then placed a cast iron monument on a straight line between the SW and SE corners at a proportional part distance in accordance with PLS rules the distance to the SE corner was found to be 2670.45 vs. Claussen 2671.68 and the distance to the SW corner was found to be 2747.28 vs. Claussen 2746.92. CIM is 7+- South of township road CL. This location is in accordance with Claussen's record for the S 1/4 corner.

The monument fit occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

For electronic survey data and analysis, contact the firm of Jones, Haugh and Smith Inc.

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

E1/4 Corner of Section 7, Township 104N, Range 17W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch:

☐ On 6-4-90 (DATE) found a wood post 3 1/2"Ø on the east side of a 6"x 6"x 14" pointed field 4.0' below road surface in virgin soil on ℄ of N-S road in line with fence west.

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 6-4-90 (DATE) placed a 5/8"Ø iron in wood post and over post at road surface.

SKETCH OF REFERENCE TIES

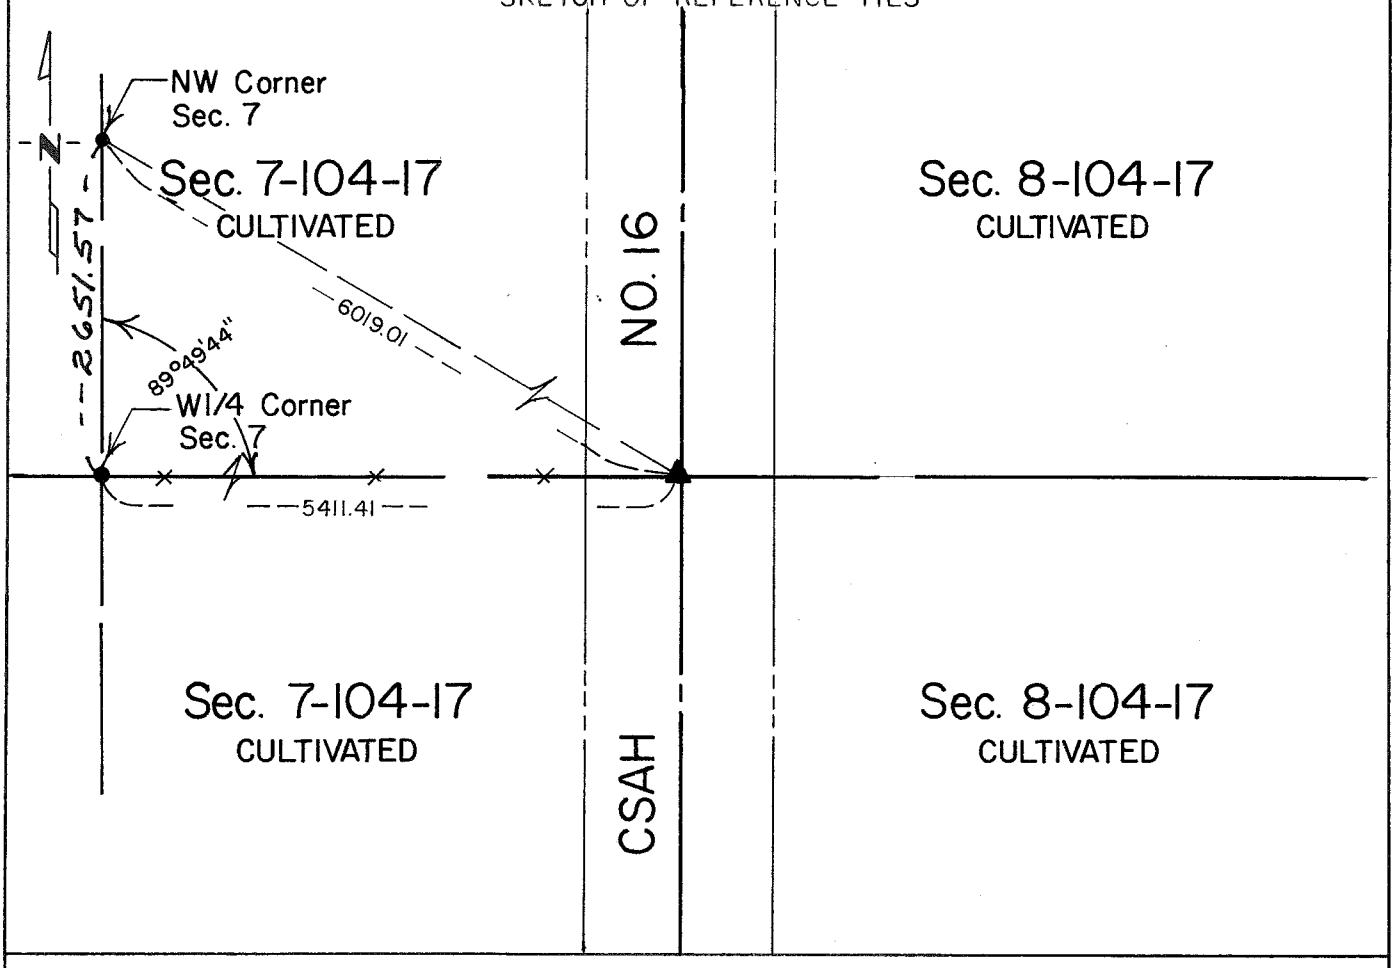

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

[signature] 9-18-90
SIGNATURE DATE

Registration No. 13807

☒ Land Surveyor, ☐ Professional Engineer

☐ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of _____

I hereby certify that this document was filed in the County Rec. office at _____ .M. on the _____ day of _____ A.D., 19__

COUNTY RECORDER _____

By _____, Deputy

DOCUMENT NO. _____

M.H.D. FORM NO. 2105

STATEMENT OF EVIDENCE

E 1/4 corner Section 7-104-17

This corner was originally established by Deputy Surveyor John Fitzpatrick of the U.S. General Land Survey Office in 1853. The government notes show this corner was marked with a wood post and a trench with a mound of earth.

The following were contacted for section corner information:

Mower County Engineering Department
Mower County Recorder's Office

1990 Jones, Haugh & Smith crew together with the Mower County backhoe dug on centerline of north-south road in line with fence west and uncovered 3 1/2" diameter wood post on the east side of a 6"x6"x14" pointed field stone 4.0 feet below road surface in virgin soil. Placed a 5/8" diameter iron in wood post and over post on road surface.

Corner found fits occupation and road centerlines and is in agreement with 1853 records of John Fitzpatrick and is accepted as best evidence of a perpetuation of the public land survey corner.

For electronic survey data and analysis contact the firm of Jones, Haugh & Smith Inc.

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

NW Corner of Section 7, Township 104N, Range 17W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch:

☐ On 6-4-90 (DATE) found a 1"Ø pipe 1.0' below road surface.

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 6-4-90 (DATE) placed a capped 5/8"Ø (13807) iron at location of pipe.

SKETCH OF REFERENCE TIES

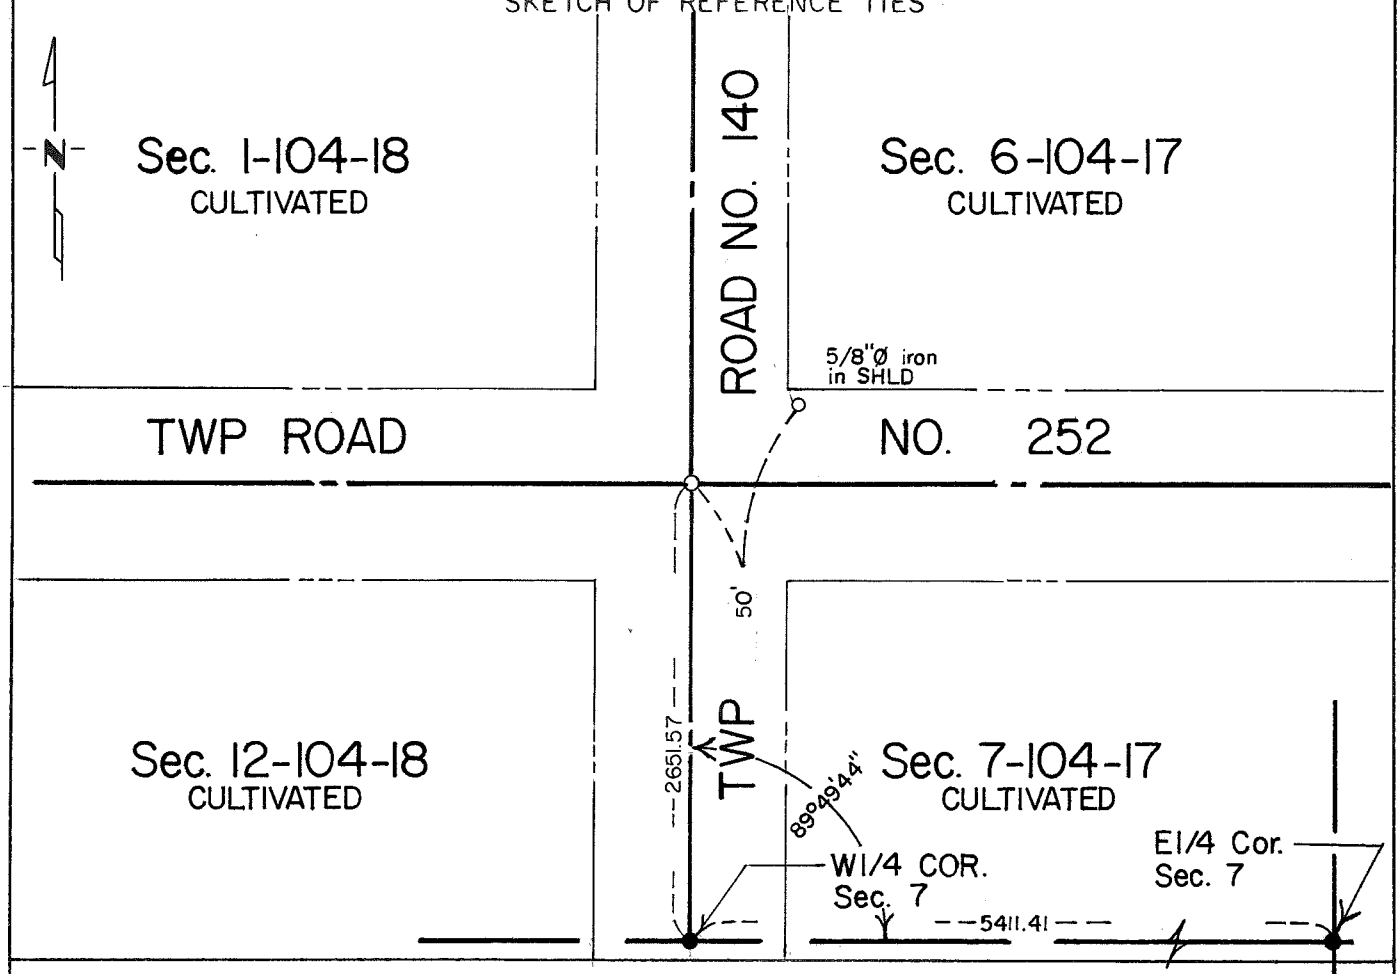

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

SIGNATURE _____ DATE 9-18-90

Registration No. 13807

☒ Land Surveyor, ☐ Professional Engineer

☐ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER

County of _____

I hereby certify that this document was filed in the County Rec. office at _____ .M. on the _____ day of _____ A.D., 19 ___

COUNTY RECORDER _____

By _____, Deputy

DOCUMENT NO. _____

M.H.D. FORM NO. 2105

STATEMENT OF EVIDENCE

NW corner Section 7-104-17

This corner was originally established by Deputy Surveyor Elisha S. Norris of the U.S. General Land Survey Office in 1853. The government notes show this corner was marked with a wood post, a trench with a mound of earth and a charred stake in center.

The following were contacted for section corner information:

Mower County Engineering Department
Mower County Recorder's Office

1931 V.A. Nason uncovered a concrete monument one foot below road surface and took ties. It was recorded in Book 'A' at the County Engineer's Office.

1940 Mower County Grading Plan shows a 1" diameter pipe was placed.

1990 Jones, Haugh & Smith crew together with the Mower County backhoe dug on centerline centerline of north-south-east-west roads and uncovered 1" diameter pipe 1.0 feet below road surface. Continued digging and found no further evidence. Reset capped 5/8" diameter iron at location of monument found.

Corner found fits road centerlines and Mower County Grading Plan and is accepted as best evidence of a perpetuation of the public land survey corner.

For electronic survey data and analysis contact the firm of Jones, Haugh & Smith Inc.

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

W1/4 Corner of Section 7, Township 104N, Range 17W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch:

☐ On 6-4-90 (DATE) found ~~a~~ no evidence

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 6-4-90 (DATE) placed a 5/8"Ø iron at the split between NW & SW corners.

SKETCH OF REFERENCE TIES

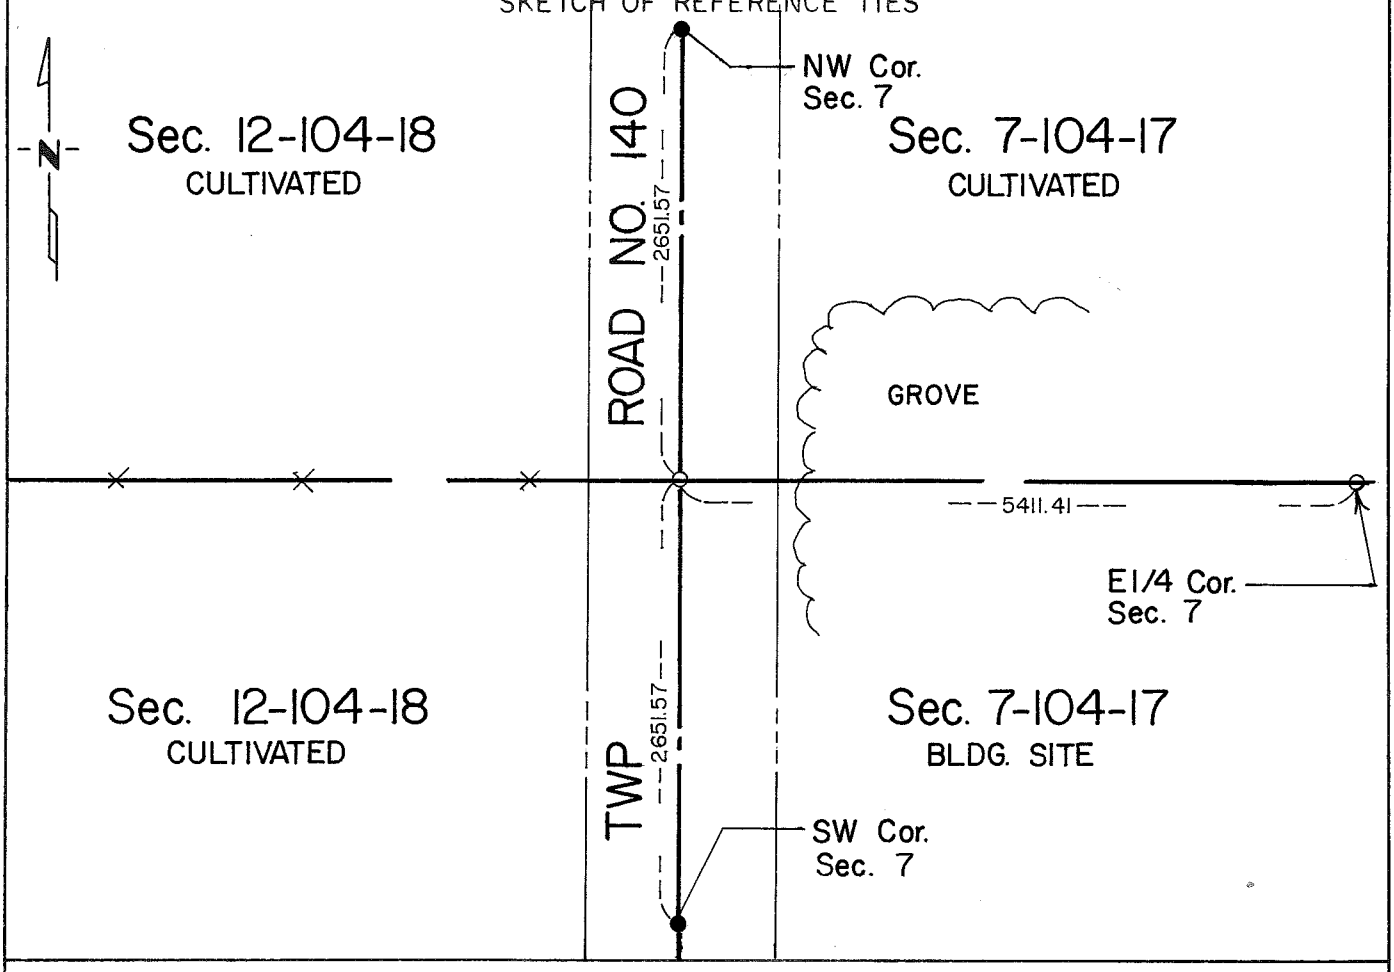

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

SIGNATURE _____ DATE 9-17-90

Registration No. 13807

☒ Land Surveyor, ☐ Professional Engineer

☐ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER

County of _____

I hereby certify that this document was filed in the County Rec. office at _____ .M. on the _____ day of _____ A.D., 19 ___

COUNTY RECORDER _____

By _____, Deputy

DOCUMENT NO. _____

M.H.D. FORM NO. 2105

STATEMENT OF EVIDENCE

W 1/4 corner Section 7-104-17

This corner was originally established by Deputy Surveyor Elisha S. Norris of the U.S. General Land Survey Office in 1853. The government notes show this corner was marked with a wood post. The following section corner ties were taken:

5"	Black Oak	S 71° W	115 links (75.9 feet)
12"	Burr Oak	S 72° E	188 links (124.08 feet)

The following were contacted for section corner information:

Mower County Engineering Department
Mower County Recorder's Office

1990 Jones, Haugh & Smith crew together with the Mower County backhoe dug on centerline of north-south road in line with fence west and found no evidence or a perpetuation of the public land survey corner. A 5/8" diameter iron capped (13807) was placed on a straight line at the midpoint between the Northwest and Southwest corners of Section 7-T104N-R17W.

Monument set fits occupation and road centerlines and is accepted as best evidence of a perpetuation of the public land survey corner.

For electronic survey data and analysis contact the firm of Jones, Haugh & Smith Inc.

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

SW Corner of Section 7, Township 104N, Range 17W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch:

☐ On 6-4-90 (DATE) found a 6"Ø concrete monument with 1/2"Ø iron 4' below road surface on ℄℄ of N-S-E-W roads.

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 6-4-90 (DATE) placed a 5/8"Ø iron capped (13807) over monument found.

SKETCH OF REFERENCE TIES

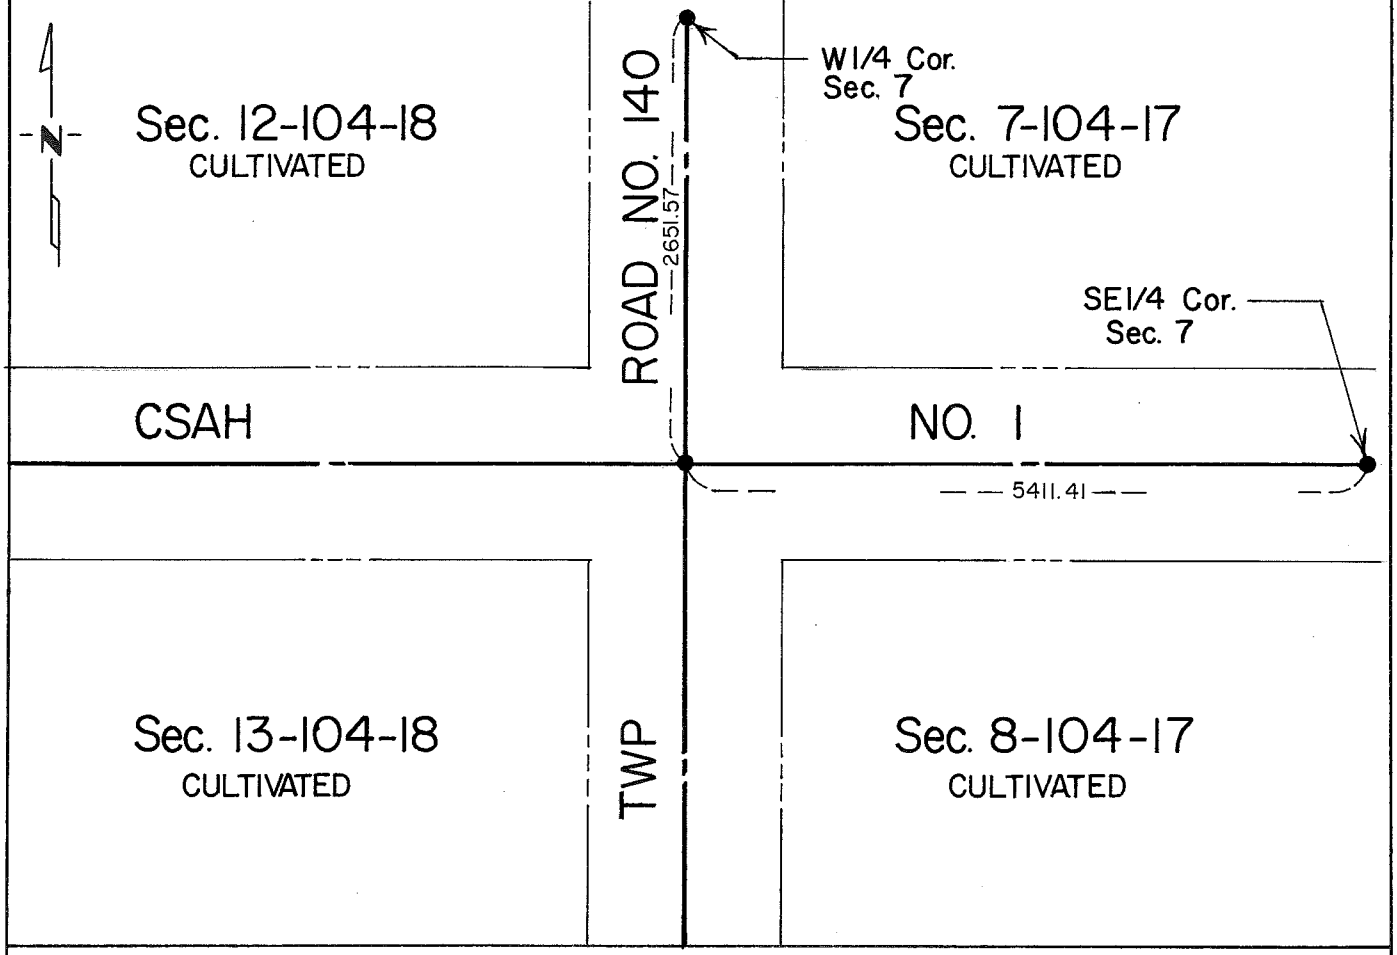

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

SIGNATURE _____ DATE 9-17-90

Registration No. 13807

☒ Land Surveyor, ☐ Professional Engineer

☐ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER

County of _____

I hereby certify that this document was filed in the County Rec. office at _____ .M. on the _____ day of _____ A.D., 19___

COUNTY RECORDER _____

By _____, Deputy

DOCUMENT NO. _____

M.H.D. FORM NO. 2105

STATEMENT OF EVIDENCE

SW corner Section 7-104-17

This corner was originally established by Deputy Surveyor Elisha S. Norris of the U.S. General Land Survey Office in 1853. The government notes show this corner was marked with a charred stake and a trench and a mound of earth.

The following were contacted for section corner information:

Mower County Engineering Department
Mower County Recorder's Office

1931 V.A. Nason uncovered a pointed field stone and ties were taken and recorded in Book 'A' in the County Engineer's Office.

1990 Jones, Haugh & Smith crew together with the Mower County backhoe dug on centerline centerline of north-south-east-west roads and uncovered a 6" diameter concrete monument with 1/2" diameter 4.0 feet below road surface. Placed a 5/8" diameter iron capped (13807) over monument found.

Corner found fits road centerlines and is accepted as best evidence of a perpetuation of the public land survey corner.

For electronic survey data and analysis contact the firm of Jones, Haugh & Smith Inc.

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

E 1/4 Corner of Section 8, Township 104 Range 17, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch

☐ On 10/04/1995 (DATE) found a SPK/W .30 BELOW ROAD SURFACE

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 10/04/1995 (DATE) placed a CAST IRON MONUMENT

SKETCH OF REFERENCE TIES

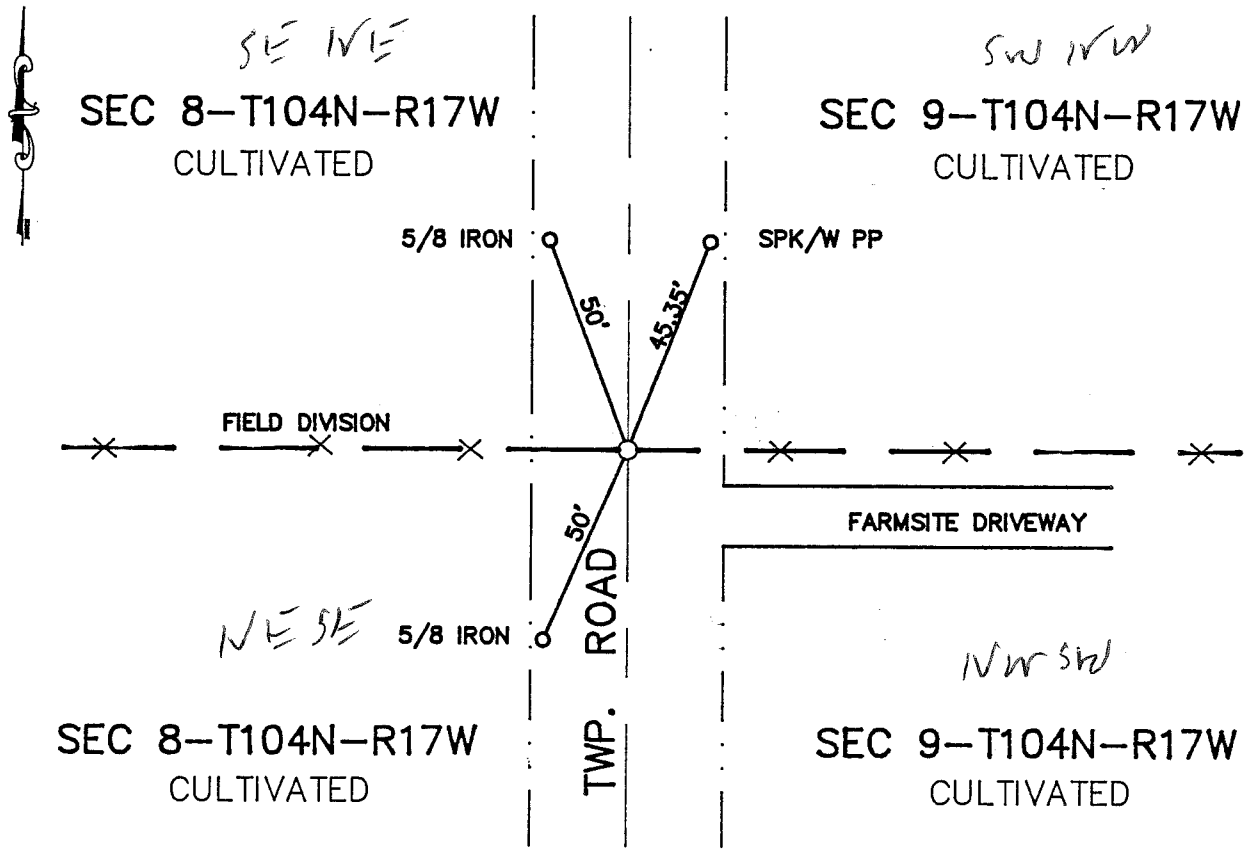

JONES, HAUGH & SMITH INC
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein were prepared by me or under my direct supervision.

SIGNATURE _____ DATE 12-27-95

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☒ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of Mower

I hereby certify that this document was filed in the County Rec. office at 2 P.M. on the 3 day of Jan A.D., 1996

COUNTY RECORDER Charles Enger

By Susan M. Davis, Deputy

DOCUMENT NO. 441731

M.H.D. FORM NO. 2105

BOOK 89 PAGE 576 Book 89 Misc Page 576

E 1/4 Cor SEC 8-104-17

This corner was originally established by Deputy Surveyor John Fitzpatrick of the U.S. General Land Office in 1853. The government notes show a wood post and deposited a stone with mound of earth and trench.

The following were contacted for section corner information.

Mower County Highway Dept.
Mower County Recorder
Zenk Engineering
Tucker Land Surveying

No record of this corner was obtained from the above mentioned offices.

1995 Jones, Haugh and Smith crew, under direction of John Schulte, Mower County Surveyor RLS 13807, dug with county backhoe at the CL of township road and in line with field division West. Uncovered a spike and washer 0.30' below road surface. Continued digging to virgin soil and found no other evidence of original PLS corner. Spike and washer fit CL of road and was in line with field division to the West. Placed a cast iron monument in place of spike.

The monument fit occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

For electronic survey data and analysis, contact the firm of Jones, Haugh and Smith Inc.

Recorded at Registers of Deeds 4-21-77 Index No. TIE B 001C P.60

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

NORTHEAST Corner of Section 9, Township 104N, Range 17W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch:

☐ On _____ (DATE) found a _____

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☒ On 9-18-75 (DATE) placed a MINNESOTA HIGHWAY DEPARTMENT CAST IRON MONUMENT (FLUSH) OVER AN 8 INCH IRON PIN.

SKETCH OF REFERENCE TIES

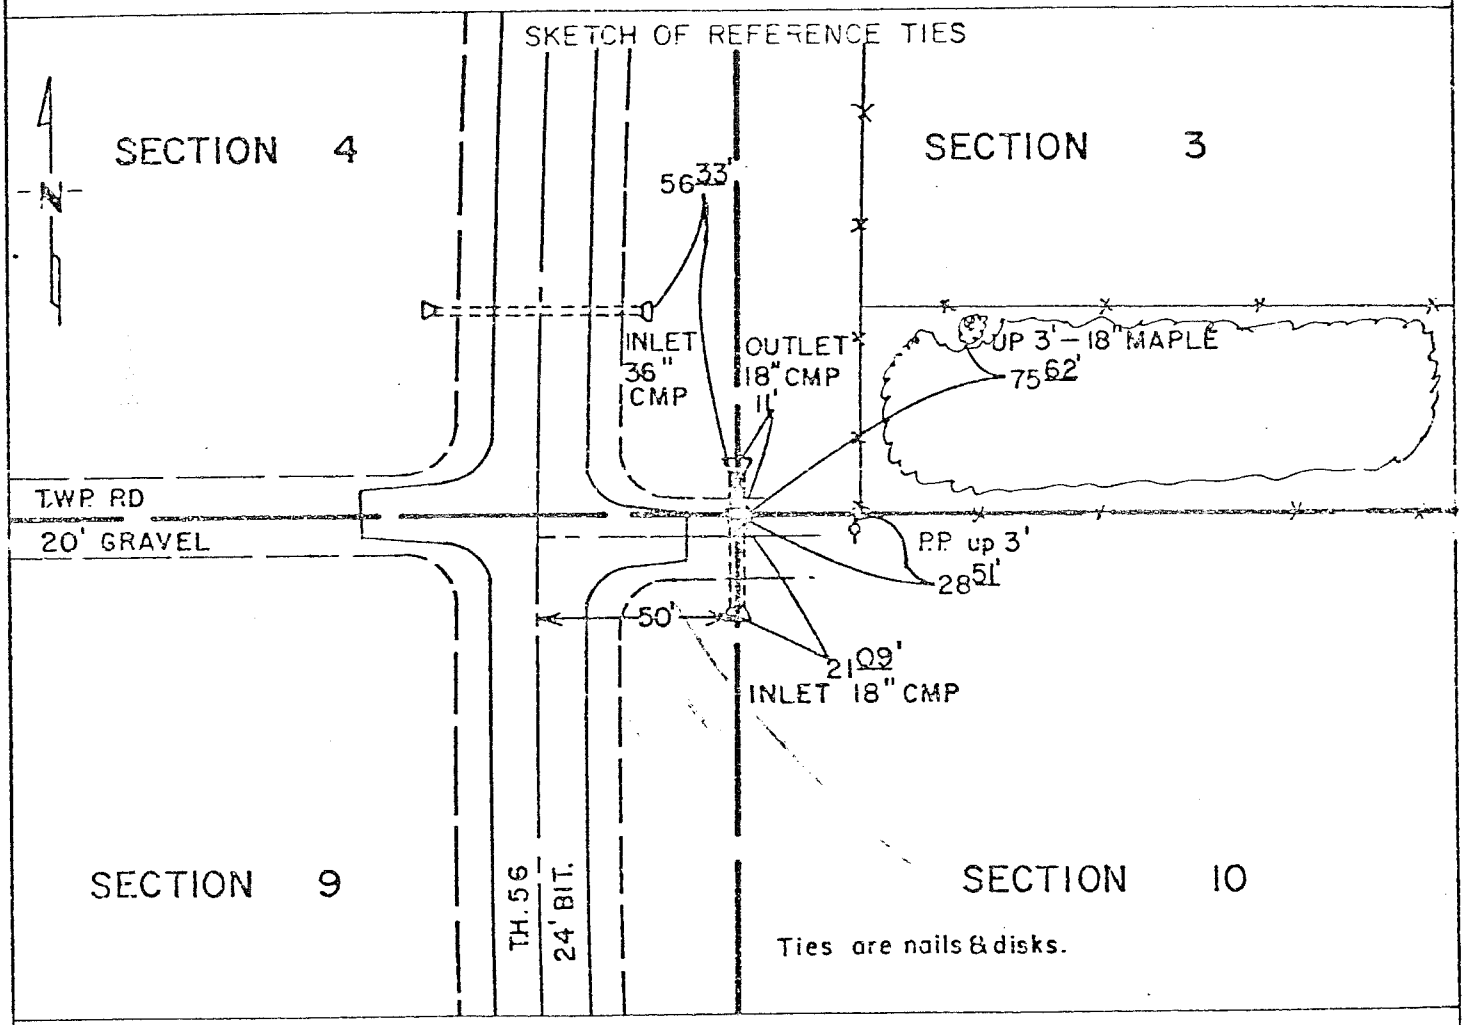

Ties are nails & disks.

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

Donald R Beheading 9/23/75
SIGNATURE DATE

Registration No. 10162

☒ Land Surveyor, ☐ Professional Engineer

☐ County Surveyor, ☐ County Engineer

OFFICE OF THE REGISTER OF DEEDS

County of _____

I hereby certify that this document was filed in the Reg. of Deeds office at _____ .M. on the _____ day of _____ A.D., 19__

Register of Deeds _____

By _____, Deputy

DOCUMENT NO. _____

M.H.D. FORM NO. 2105

Statement of Evidence:

NORTHEAST CORNER OF SECTION 9, TOWNSHIP 104N, RANGE 17W, 5th P.M.

Nov. 1853 — John Fitzpatrick, Deputy Surveyor, set post, deposited stone, made mound of earth and sod with trench and pits for the corner during the Original Public Land Survey.

1929 — C. Aasland, Minnesota Highway Department Engineer, found no corner, used same point as location party in center of road intersection.

1941 — O. J. Gerner, Minnesota Highway Department Engineer, assumed corner in center of X-road 53.1 feet east of POT 1367+40.2.

1955 — E. L. Pearson, Minnesota Highway Department Engineer, found the corner as high point of a field stone 50.0 feet East of POT 1367+43.5 and took ties to a 10 inch maple NE at 75.62 feet and a power pole SE at 28.51 feet.

1975 — Don Borcherding, Minnesota Highway Department Registered Land Surveyor recovered the 1955 ties.

An analysis of the record and survey data indicates the stone found by Pearson in 1955 was in the old road intersection as assumed by Aasland in 1929. The corner was destroyed by road construction in 1955 and was reset by obliterated methods using the 1955 ties. This position fits the occupation lines and is accepted as a perpetuation of the Public Land Survey Corner.

For details of the survey data, contact the Minnesota Highway Departments District Surveying and Mapping Section, Rochester.

Recorded at Register of Deeds 4-21-77 Index No. TIE BOOK P. 60

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

EAST QUARTER Corner of Section 9, Township 104 N, Range 17 W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch:

☒ On 7-10-72 (DATE) found a 6 INCH BY 6 INCH CONCRETE MONUMENT DOWN 1 FOOT

☒ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☒ On 4-29-75 (DATE) placed a MINNESOTA HIGHWAY DEPARTMENT CAST IRON MONUMENT ABOVE CONCRETE MONUMENT 1/2 INCH BELOW SURFACE.

SKETCH OF REFERENCE TIES

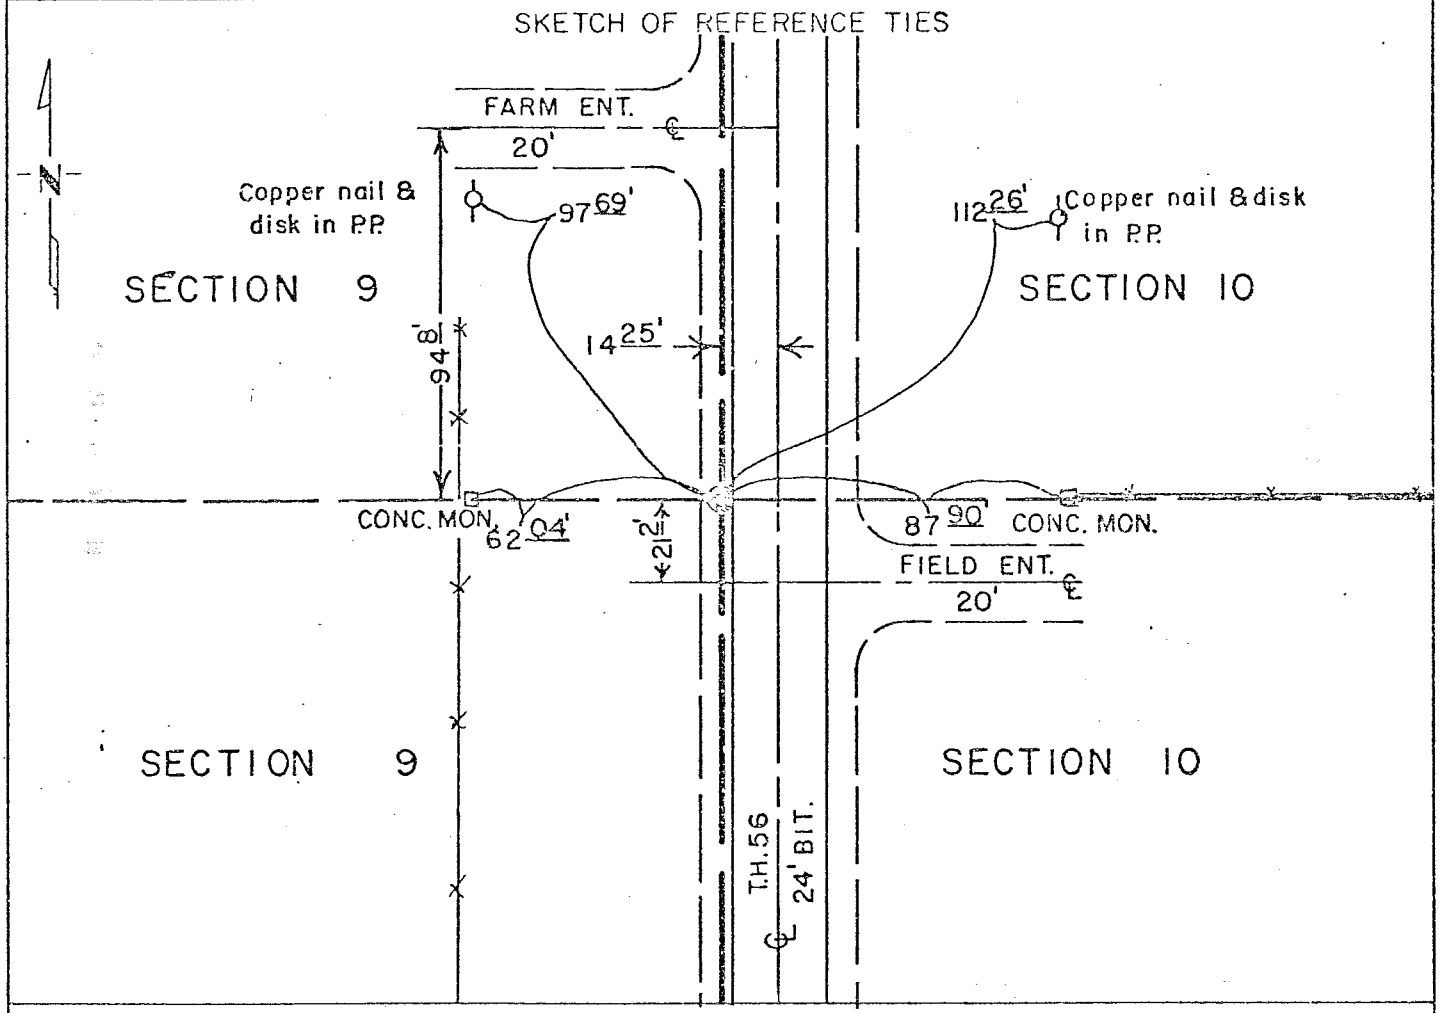

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

Ronald R Blessing (SIGNATURE) 9/8/75 (DATE)

Registration No. 10162

☒ Land Surveyor, ☐ Professional Engineer

☐ County Surveyor, ☐ County Engineer

OFFICE OF THE REGISTER OF DEEDS

County of _____

I hereby certify that this document was filed in the Reg. of Deeds office at _____ .M. on the _____ day of _____ A.D., 19 ___

Register of Deeds _____

By _____, Deputy

DOCUMENT NO. _____

M.H.D. FORM NO. 2105

Statement of Evidence:

EAST QUARTER CORNER OF SECTION 9, TOWNSHIP 104N, RANGE 17 W, 5th P.M.

November 1853 — John Fitzpatrick, Deputy Surveyor, set post, deposited stone, made a mound of earth and sod with trench and pits for the corner during the Original Public Land Survey.

July 1929 — C. Aasland, M.H. D. Engineer, found a stone 14.5 feet west of the PI 1340+85.2 for the corner and replaced with a 6 inch by 6 inch by 18 inch concrete marked on May 5, 1930.

1941 — O. J. Gerner, M.H.D. Engineer found a 6 inch by 6 inch concrete monument 14.5 feet west of the PI 1340+85.2 inplace 20 inches below the surface.

July 1972 — A. L. Sotebeer, M.H.D. Engineer found a 6 inch by 6 inch concrete monument, 1.0 foot below surface, 14.25 feet west of PI 1340+85.2.

April 1975 — M.H.D. placed a Cast Iron Monument above the 6 inch by 6 inch concrete monument 1/2 inch below road surface for the corner.

An analysis of the record data indicates the concrete monument was set in 1930 to replace the stone found in 1929. The concrete monument is accepted as a perpetuation of the Public Land Survey Corner.

For details of the survey data, contact the Minnesota Highway Department's District Surveying and Mapping Section, Rochester.

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

SE Corner of Section 10, Township 104N Range 17W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch

☐ On 03/16/2002 (DATE) found a CIM

☒ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On _____ (DATE) placed a _____

SKETCH OF REFERENCE TIES

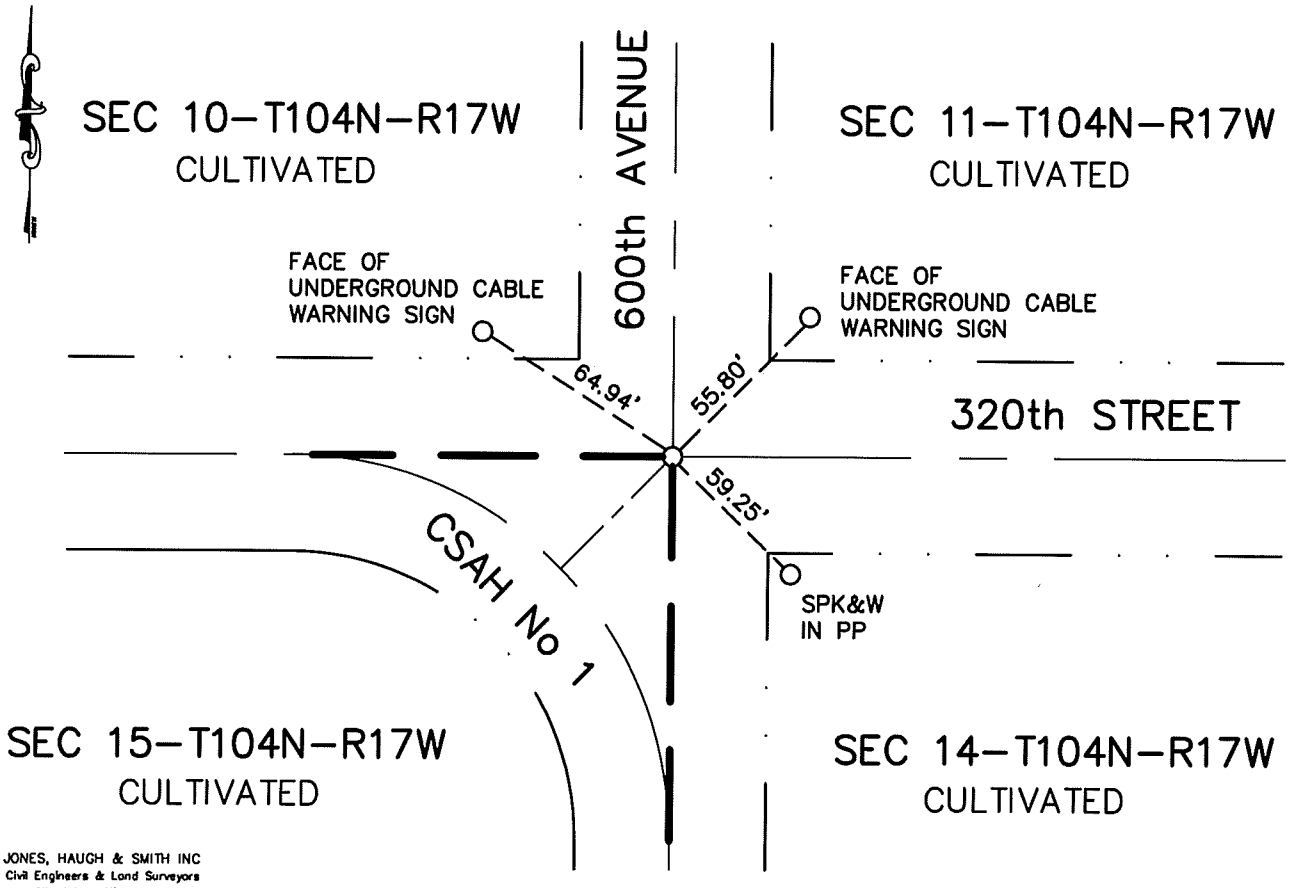

JONES, HAUGH & SMITH INC
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein were prepared by me or under my direct supervision.

_____ (SIGNATURE) 4-2-02 (DATE)

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☒ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of _____

I hereby certify that this document was filed in the County Rec. office at _____ .M. on the _____ day of _____ A.D., 20___

COUNTY RECORDER _____

By _____, Deputy

DOCUMENT NO. _____

M.H.D. FORM NO. 2105

SE Cor Sec 10-104-17

Deputy Surveyor John Fitzpatrick of the U.S. General Land Office originally established this corner in 1853. The government notes show a wood post was set with mound of earth and trench.

The following were contacted for section corner information.

Mower County Highway Dept.
Mower County Recorder
Tucker Land Surveying

1956 Mower County Highway Dept. road plan shows a concrete monument inplace at this location.

2002 Jones Haugh and Smith crew, under direction of John Schulte, Mower County Surveyor RLS 13807, dug by hand at location of signal from magnetic locator and found a CIM. Monument fits the 1956 road plan location and is accepted as a perpetuation of the original PLS corner. Took new ties.

The monument fits occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

For electronic survey data and analysis, contact the firm of Jones, Haugh and Smith Inc.

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

N 1/4 Corner of Section 10, Township 104N Range 17W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch

☐ On _____ (DATE) found a _____

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 03/16/2002 (DATE) placed a 5/8" IRON CAPPED 13807

SKETCH OF REFERENCE TIES

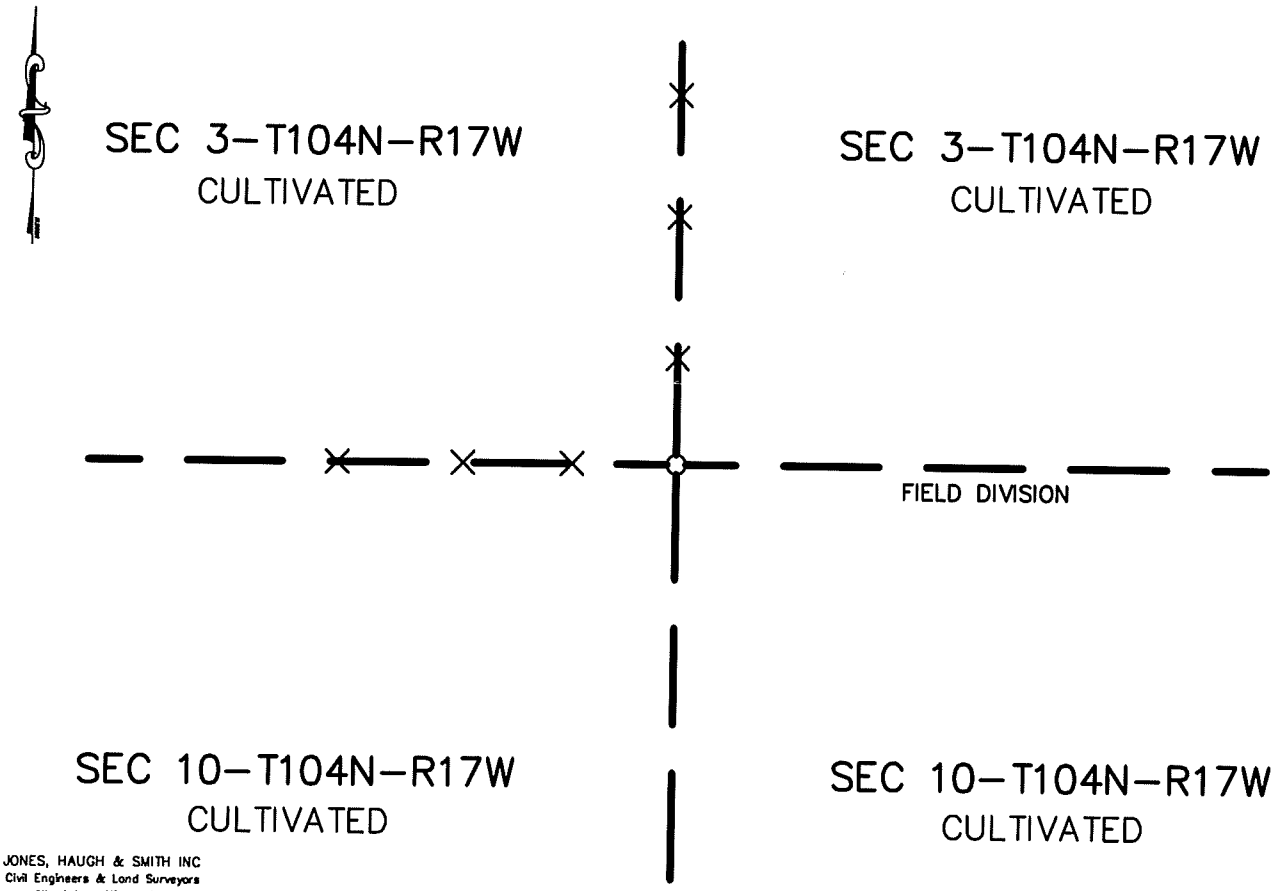

JONES, HAUGH & SMITH INC
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein were prepared by me or under my direct supervision.

_____ (SIGNATURE) 4-2-02 (DATE)

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☒ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of _____

I hereby certify that this document was filed in the County Rec. office at _____ .M. on the _____ day of _____ A.D., 20___

COUNTY RECORDER _____

By _____, Deputy

DOCUMENT NO. _____

M.H.D. FORM NO. 2105

N ¼ Cor Sec 10-104-17

Deputy Surveyor John Fitzpatrick of the U.S. General Land Office originally established this corner in 1853. The government notes show a wood post was set with mound of earth and trench.

The following were contacted for section corner information.

Mower County Highway Dept.
Mower County Recorder
Tucker Land Surveying

No record of this corner was obtained from the above mentioned offices.

2002 Jones Haugh and Smith crew, under direction of John Schulte, Mower County Surveyor RLS 13807, searched the area and found no evidence of a PLS cor. Set a 5/8" iron capped 13807 at the intersection of fence lines North and West, and field division East.

The monument fits occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

For electronic survey data and analysis, contact the firm of Jones, Haugh and Smith Inc.

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

N1/4 Corner of Section 11, Township 104N, Range 17W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch:

☐ On _____ (DATE) found a _____

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 9-19-90 (DATE) placed a 5/8"Ø capped iron at 4-way fence intersection. (13807)

SKETCH OF REFERENCE TIES

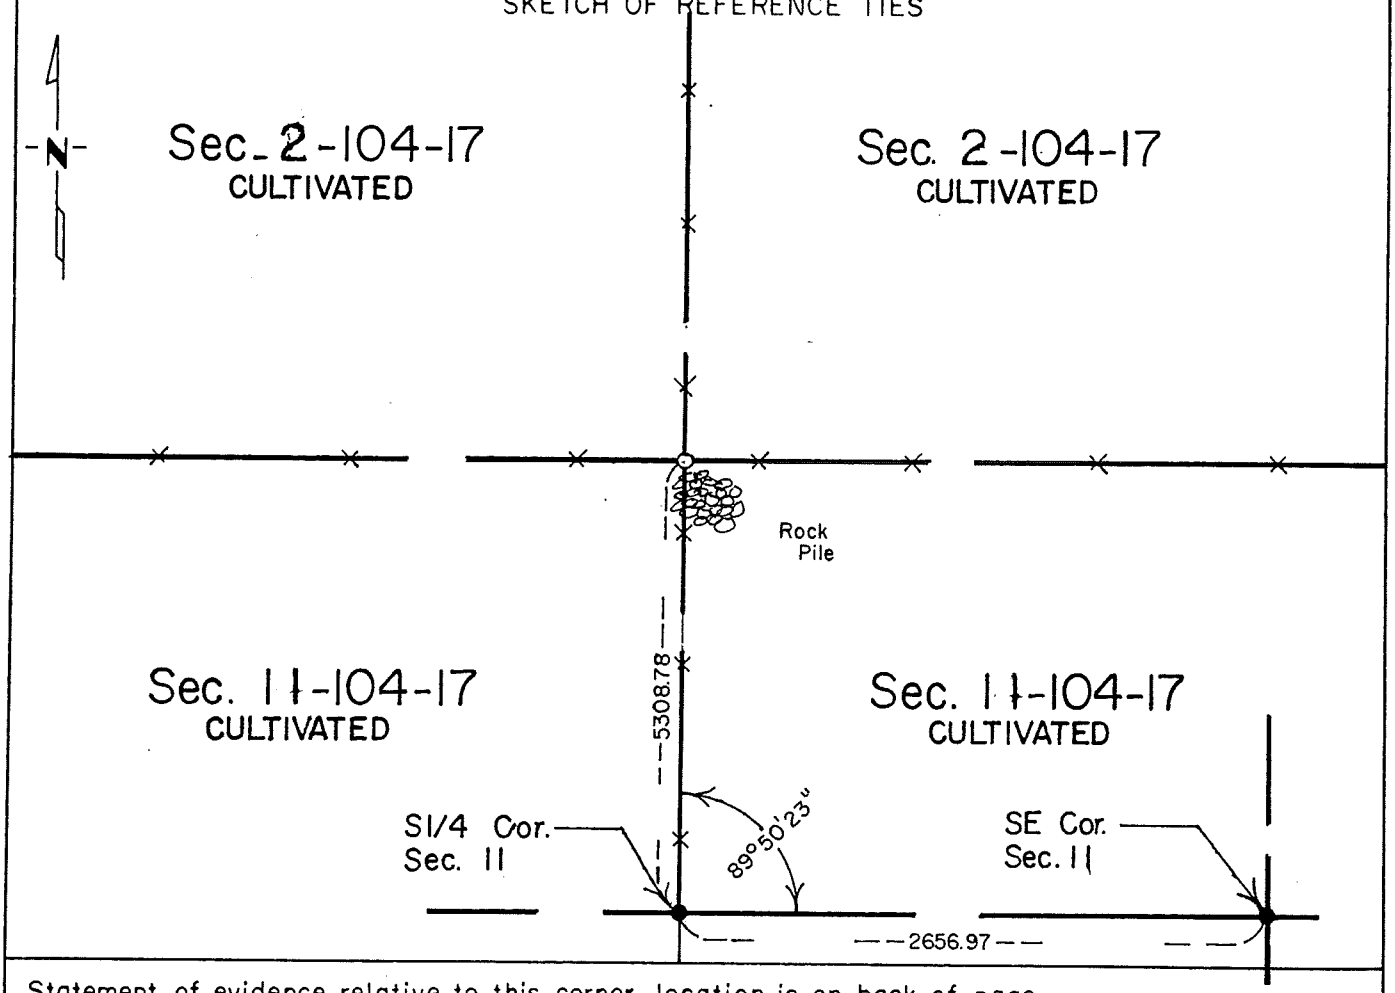

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

_____ (SIGNATURE) 7-30-91 (DATE)

Registration No. 13807

☑ Land Surveyor, ☐ Professional Engineer

☐ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER

County of _____

I hereby certify that this document was filed in the County Rec. office at _____ .M. on the ____ day of _____ A.D., 19__

COUNTY RECORDER _____

By _____, Deputy

DOCUMENT NO. _____

M.H.D. FORM NO. 2105

STATEMENT OF EVIDENCE

N 1/4 corner Sec. 11-104-17

This corner was originally established by Deputy Surveyor John Fitzpatrick of the U.S. General Land Survey Office in 1853. The government notes show this corner was marked with a wood post, stone and a mound of earth with a trench.

The following were contacted for section corner information:

Mower County Engineering Department
Mower County Recorders Office

1990 Jones, Haugh & Smith crew placed a 5/8" diameter iron (capped 13807) at a 4-way fence intersection.

Corner placed fits occupation lines and is accepted as best evidence of the public land survey corner.

For electronic survey data and analysis contact the firm of Jones, Haugh & Smith Inc.

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

S1/4 Corner of Section 11, Township 104N, Range 17W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch:

☐ On 9-19-90 (DATE) found a 1/2" Ø iron 0.3' below road surface continued digging and found remains of a wood post at a depth of 2.5'

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 9-19-90 (DATE) placed a cast iron monument over post and iron found.

SKETCH OF REFERENCE TIES

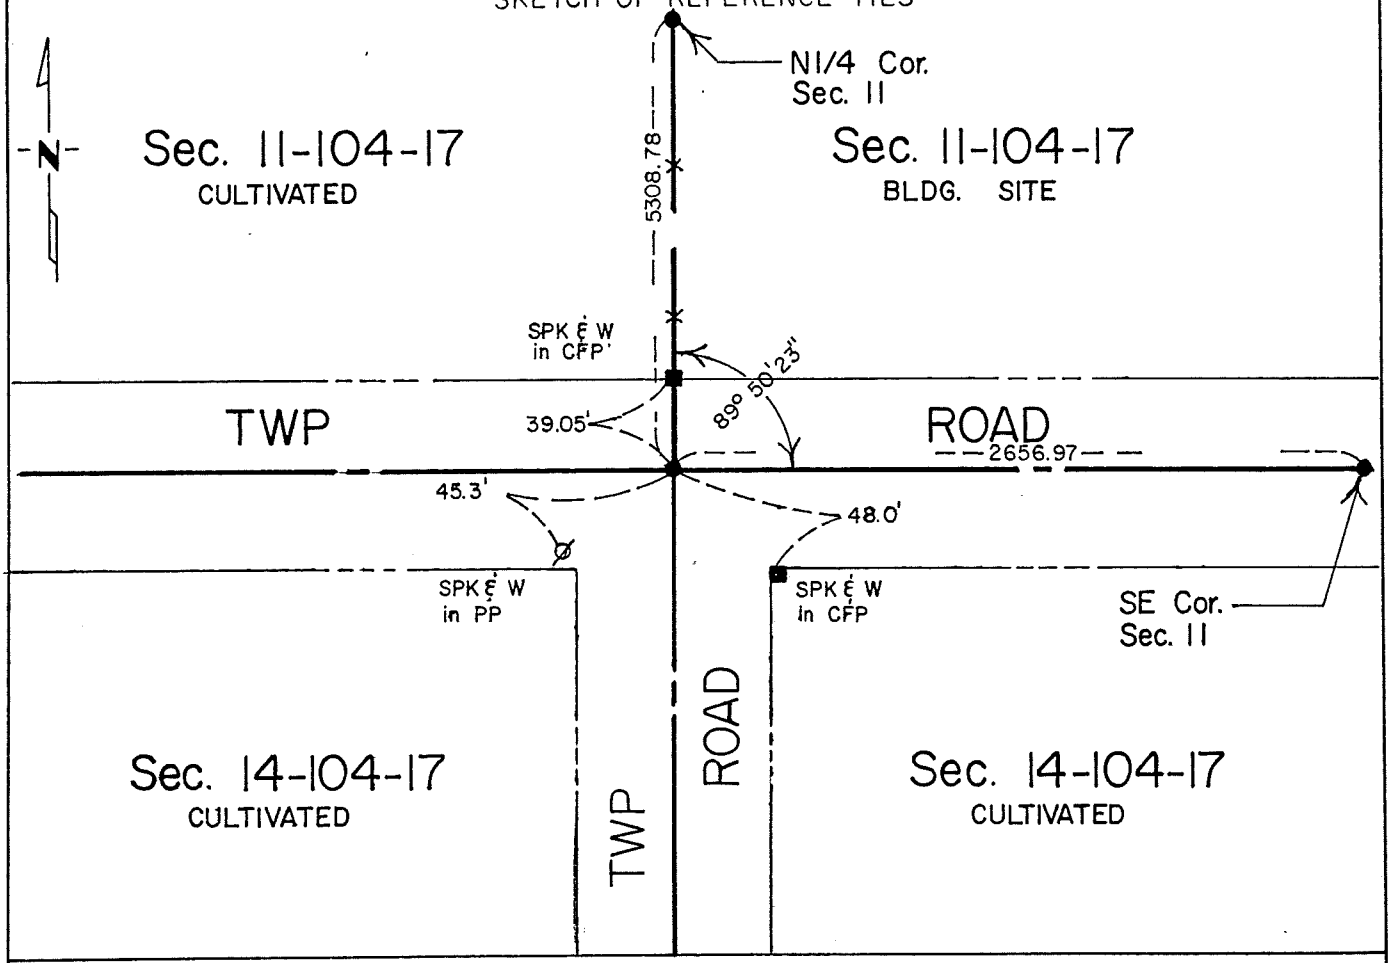

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

SIGNATURE _____ DATE 7-30-91

Registration No. 13907

☑ Land Surveyor, ☐ Professional Engineer

☐ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER

County of _____

I hereby certify that this document was filed in the County Rec. office at _____ .M. on the ____ day of _____ A.D., 19__

COUNTY RECORDER _____

By _____, Deputy

DOCUMENT NO. _____

M.H.D. FORM NO. 2105

STATEMENT OF EVIDENCE

S 1/4 corner Sec. 11-104-17

This corner was originally established by Deputy Surveyor John Fitzpatrick of the U.S. General Land Survey Office in 1853. The government notes show this corner was marked with a wood post, stone and a mound of earth with a trench.

The following were contacted for section corner information:

Mower County Engineering Department
Mower County Recorders Office

1990 Jones, Haugh & Smith crew along with a private backhoe dug a hole 3'x3'x8' deep on centerline centerline of east-west-south roads in line with fence north. Uncovered a 1/2" diameter iron 0.3 feet below road surface. Continued digging and found remains of a wood post 2.5 feet deep. A cast iron monument was placed over post and iron found.

Corner found fits occupation and road centerline and is accepted as best evidence of the public land survey corner.

For electronic survey data and analysis contact the firm of Jones, Haugh & Smith Inc.

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

SE Corner of Section 11, Township 104N, Range 17W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch:

☐ On 9-19-90 (DATE) found a 1/2"Ø eyebolt iron 2.0' North of East-West road in line with ℄ of North-South road.

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 9-19-90 (DATE) placed a cast iron monument over iron found.

SKETCH OF REFERENCE TIES

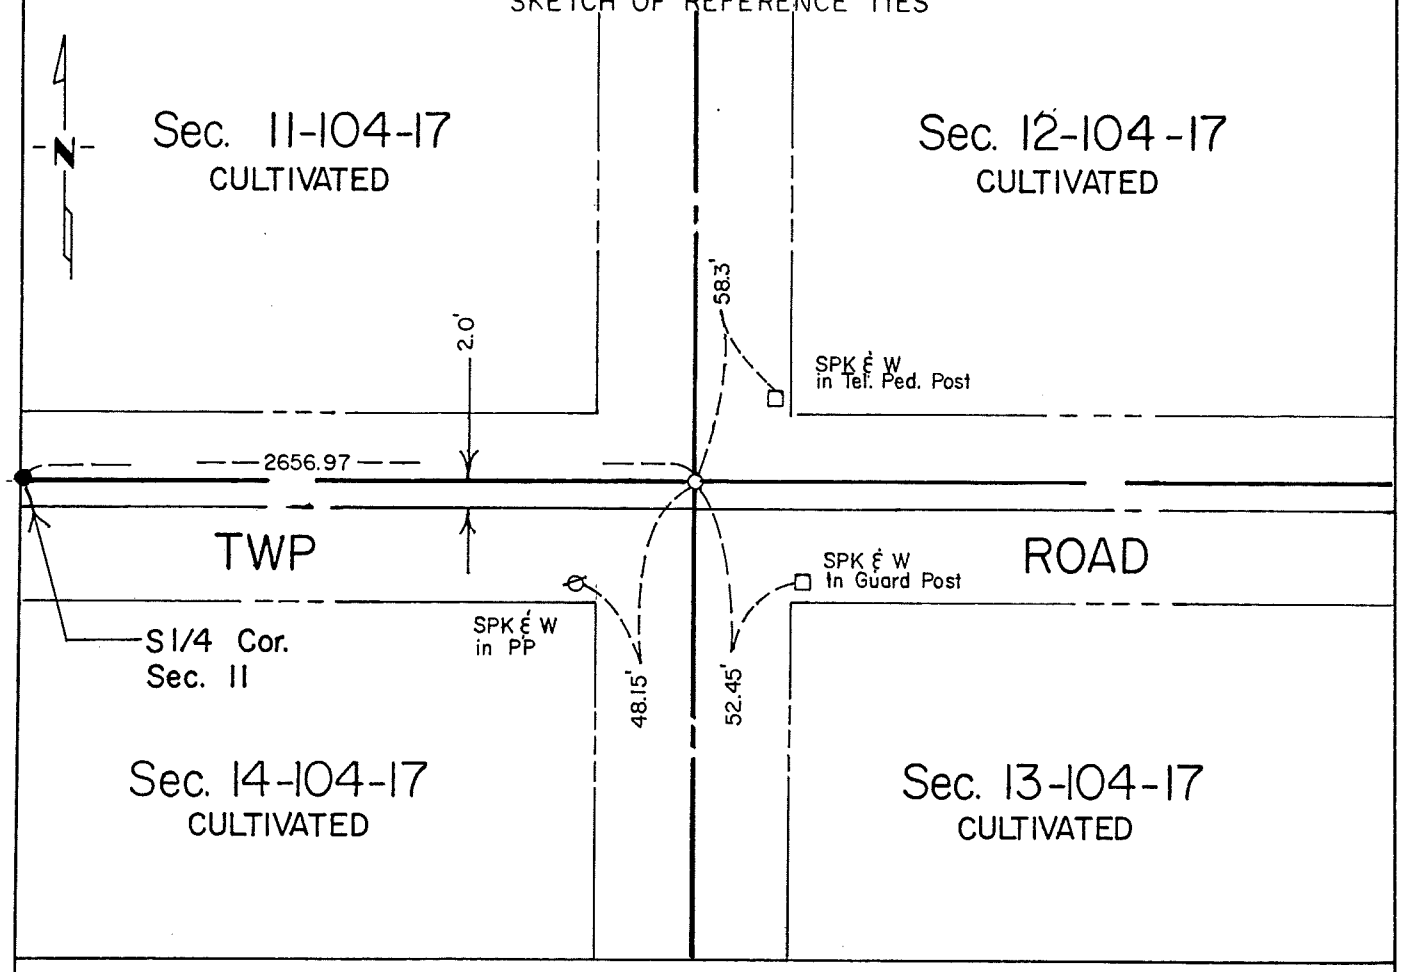

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

SIGNATURE _____ DATE 7-30-91

Registration No. 13807

☑ Land Surveyor, ☐ Professional Engineer

☐ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER

County of _____

I hereby certify that this document was filed in the County Rec. office at _____ .M. on the ____ day of _____ A.D., 19__

COUNTY RECORDER _____

By _____, Deputy

DOCUMENT NO. _____

M.H.D. FORM NO. 2105

STATEMENT OF EVIDENCE

SE corner Sec. 11-104-17

This corner was originally established by Deputy Surveyor John Fitzpatrick of the U.S. General Land Survey Office in 1853. The government notes show this corner was marked with a wood post, stone and a mound of earth with a trench.

The following were contacted for section corner information:

Mower County Engineering Department
Mower County Recorders Office

1990 Jones, Haugh & Smith crew along with a private backhoe dug a hole 10'x10'x6' deep on centerline centerline of north-south-east-west roads and uncovered a 1/2" diameter eyebolt iron 2.0' north of east-west road in line with centerline of north-south road. A cast iron monument was placed over iron found.

Corner found fits east-west road centerline and is accepted as best evidence found of the public land survey corner.

For electronic survey data and analysis contact the firm of Jones, Haugh & Smith Inc.

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

W 1/4 Corner of Section 12, Township 104 Range 17, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch

☐ On – (DATE) found a –

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 10/04/1995 (DATE) placed a 5/8 ON N–S ROAD IN LINE WITH FENCE LINE EAST

SKETCH OF REFERENCE TIES

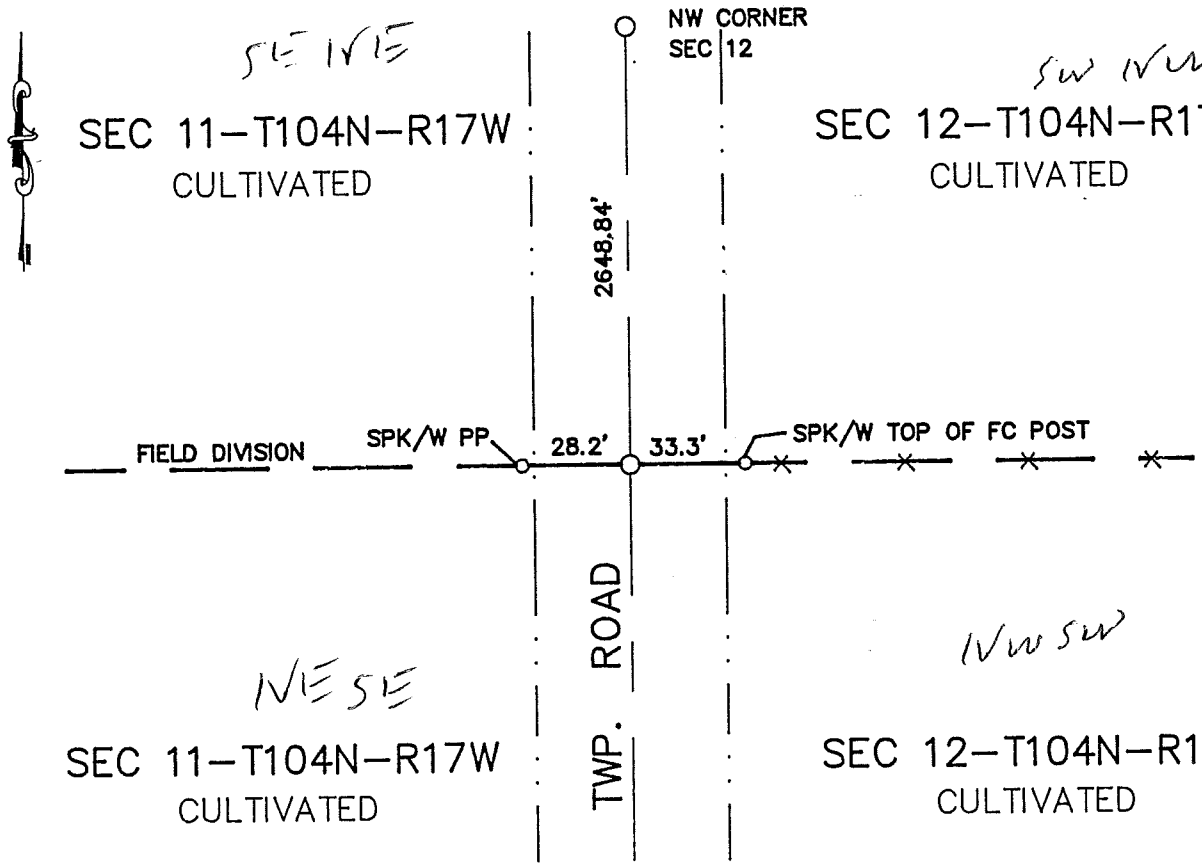

JONES, HAUGH & SMITH INC
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein were prepared by me or under my direct supervision.

SIGNATURE _____ DATE 12-27-95

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☒ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of Mower

I hereby certify that this document was filed in the County Rec. office at 2 p .M. on the 3 day of Jan A.D., 1996

COUNTY RECORDER Charles Engen

By Susan M. Davis, Deputy

DOCUMENT NO. 441732

M.H.D. FORM NO. 2105 BOOK 89 PAGE 578 Book 89 Misc Page 578

W 1/4 Cor SEC 12-104-17

This corner was originally established by Deputy Surveyor John Fitzpatrick of the U.S. General Land Office in 1853. The government notes show a stone was placed with a mound of earth and trench.

The following were contacted for section corner information.

Mower County Highway Dept.
Mower County Recorder
Zenk Engineering
Tucker Land Surveying

No record of this corner was obtained from the above mentioned offices.

1995 Jones, Haugh and Smith crew, under direction of John Schulte, Mower County Surveyor RLS 13807, dug with county backhoe at the CL of township road and intersection of fence E-W. Found no evidence of original PLS corner. Place a 5/8"x16" iron pin on the CL of township road and in line with fence lines East and West.

The monument fit occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

For electronic survey data and analysis, contact the firm of Jones, Haugh and Smith Inc.

Index No. NP

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

NW Corner of Section 16, Township 104N, Range 17W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch:

☒ On 9-25-89 (DATE) found a 1/2 Ø" IRON CAST IN 6" ROUND CONC. MONUMENT.

☒ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☒ On 9-25-89 (DATE) placed a 5/8" Ø IRON CAPPED RLS 13807 OVER CONC. MONUMENT ON ROAD SURFACE.

SKETCH OF REFERENCE TIES

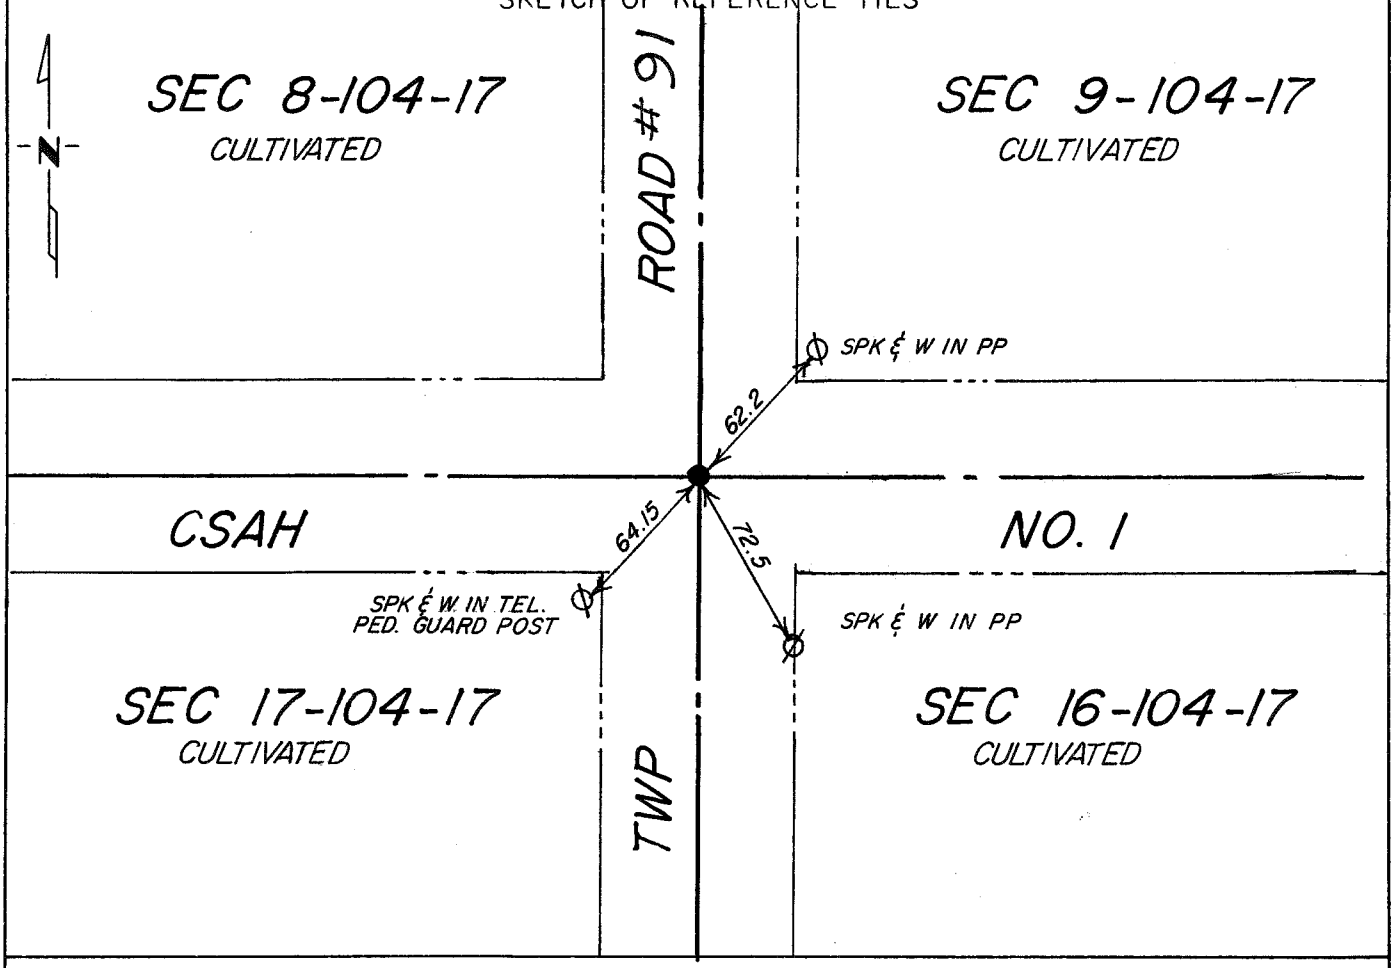

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

[signature] SIGNATURE 12-21-89 DATE

Registration No. 13807

☒ Land Surveyor, ☐ Professional Engineer

☐ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER

County of _____

I hereby certify that this document was filed in the County Rec. office at _____ .M. on the _____ day of _____ A.D., 19__

COUNTY RECORDER _____

By _____, Deputy

DOCUMENT NO. _____

M.H.D. FORM NO. 2105

STATEMENT OF EVIDENCE

NW 1/4 corner Section 16-104-17

This corner was originally established by Deputy Surveyor John Fitzpatrick of the United States General Land Office in 1854. The government notes show this corner was marked with a charred stake together with a mound of earth and trench.

The following were contacted for section corner information:

Mower County Highway Department
Mower County Records Office

1930+ Mower County grading plan shows a concrete monument inplace and ties were taken during road project.

1989 Jones, Haugh & Smith Inc. personnel together with the Mower County backhoe operator dug a 6'x 6' x 2' deep hole and uncovered a 1/2" diameter iron cast in a 6" diameter concrete monument 2' below the road surface. Placed a 5/8" diameter x 16" iron capped RLS 13807 over concrete monument on road surface.

The monument found fits occupation and road centerlines within the section and agrees with past records from the Mower County Highway Department.

For electronic survey data and analysis, contact firm of Jones, Haugh & Smith.

Index No. P132 "S"

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

W1/4 Corner of Section 16, Township 104W, Range 17W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch:

☐ On 9-25-89 (DATE) found a stone on North side of 1"Ø pipe 3.0' deep on ℄ N-S road in line with fence west 3.0' North of fence East.

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 9-25-89 (DATE) placed a 5/8"Ø iron capped 13807 over monument found.

SKETCH OF REFERENCE TIES

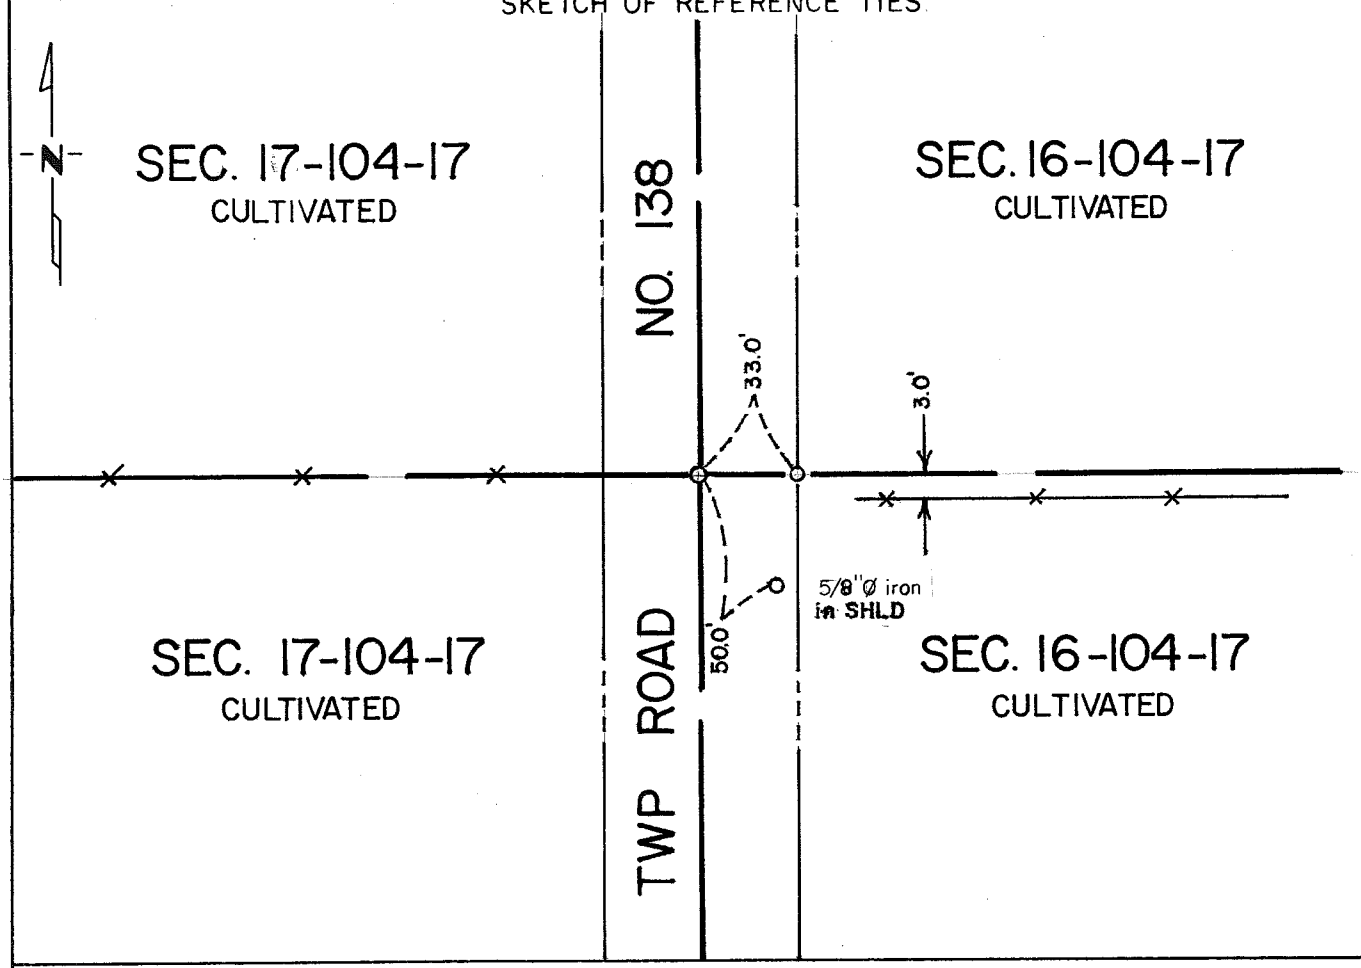

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

SIGNATURE 9-17-90 DATE

Registration No. 13907

☒ Land Surveyor, ☐ Professional Engineer

☐ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER

County of _____

I hereby certify that this document was filed in the County Rec. office at _____ .M. on the _____ day of _____ A.D., 19__

COUNTY RECORDER _____

By _____, Deputy

DOCUMENT NO. _____

M.H.D. FORM NO. 2105

STATEMENT OF EVIDENCE

W 1/4 corner Section 16-104-17

This corner was originally established by Deputy Surveyor John Fitzpatrick of the U.S. General Land Survey Office in 1853. The government notes show this corner was marked with a wood post, a stone and a trench with a mound of earth.

The following were contacted for section corner information:

Mower County Engineering Department
Mower County Recorder's Office

1990 Jones, Haugh & Smith crew dug with the Mower County backhoe and found a stone on the north side of 1" diameter pipe 3.0 feet below road surface on centerline of north-south road in line with fence west and 3.0 feet north of fence east. Placed a 5/8" diameter iron capped 13807 over monument found.

Corner found fits road centerlines and past record and is accepted as best evidence and perpetuation of the public land survey corner.

For electronic survey data and analysis contact the firm of Jones, Haugh & Smith Inc.

Index No. N-P

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

W1/4 Corner of Section 16, Township 104N, Range 17W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch:

☒ On 9-25-89 (DATE) found a LARGE FIELD STONE ON THE NORTH SIDE OF 1" DIA. PIPE 3' BELOW ROAD SURFACE.

☒ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☒ On 9-25-89 (DATE) placed a 5/8" Ø IRON CAPPED RLS 13807 OVER PIPE.

SKETCH OF REFERENCE TIES

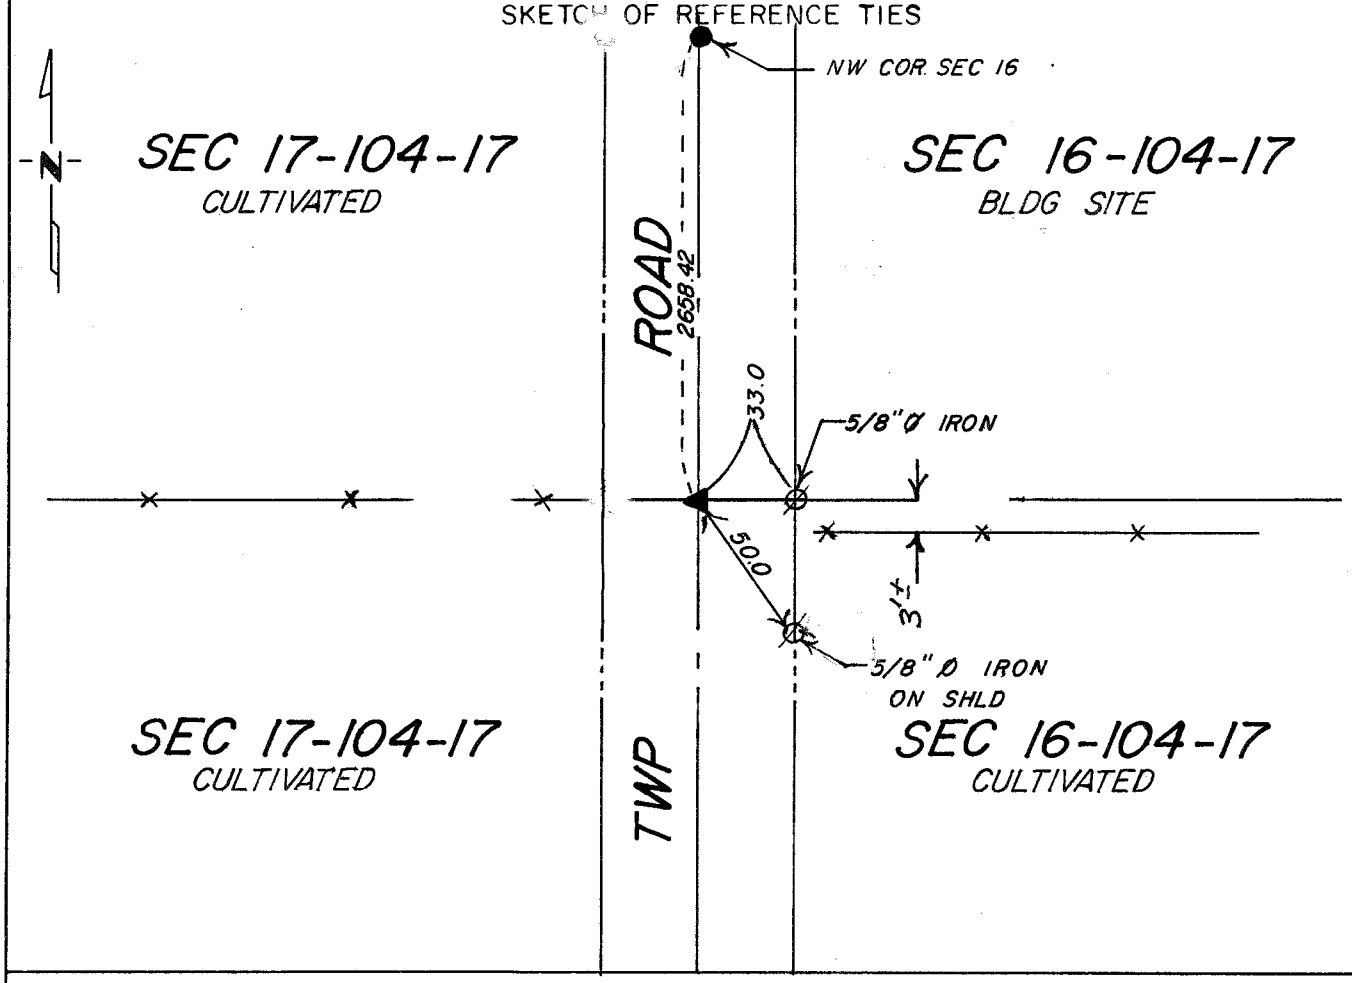

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

[signature] 12-21-89
SIGNATURE DATE

Registration No. 13807

☒ Land Surveyor, ☐ Professional Engineer

☐ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of _____

I hereby certify that this document was filed in the County Rec. office at _____ .M. on the _____ day of _____ A.D., 19__

COUNTY RECORDER _____

By _____, Deputy

DOCUMENT NO. _____

M.H.D. FORM NO. 2105

STATEMENT OF EVIDENCE

W 1/4 corner Section 16-104-17

This corner was originally established by Deputy Surveyor John Fitzpatrick of the United States General Land Office in 1854. The government notes show a wood post was set and a field stone was deposited with a mound of earth and trenches.

The following were contacted for section corner information:

Mower County Highway Department
Mower County Records Office

No recent information was obtained to support evidence of a perpetuation of the original public land survey corner.

1989 Jones, Haugh & Smith Inc. crew together with the Mower County backhoe operator dug a 6'x 12'x 3' deep hole on the centerline of N-S road in line with fence west and uncovered a 1" diameter pipe on the south side of a large field stone 3' below road surface in virgin soil. Placed a 5/8" diameter x 16" iron rebar capped RLS 13807 over 1" diameter pipe on road surface.

The monument found fits occupation and road centerlines within the section and is accepted as the original public land survey corner or a perpetuation thereof.

"P" p60, "B" p132

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

NW Corner of Section 16, Township 104W, Range 17W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch:

☐ On 9-25-89 (DATE) found a 1/2"Ø iron in 6" round concrete monument 3.0' below road surface on ℄℄ of N-S-E-W roads.

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 9-25-89 (DATE) placed a 5/8"Ø iron capped 13807 over monument found.

SKETCH OF REFERENCE TIES

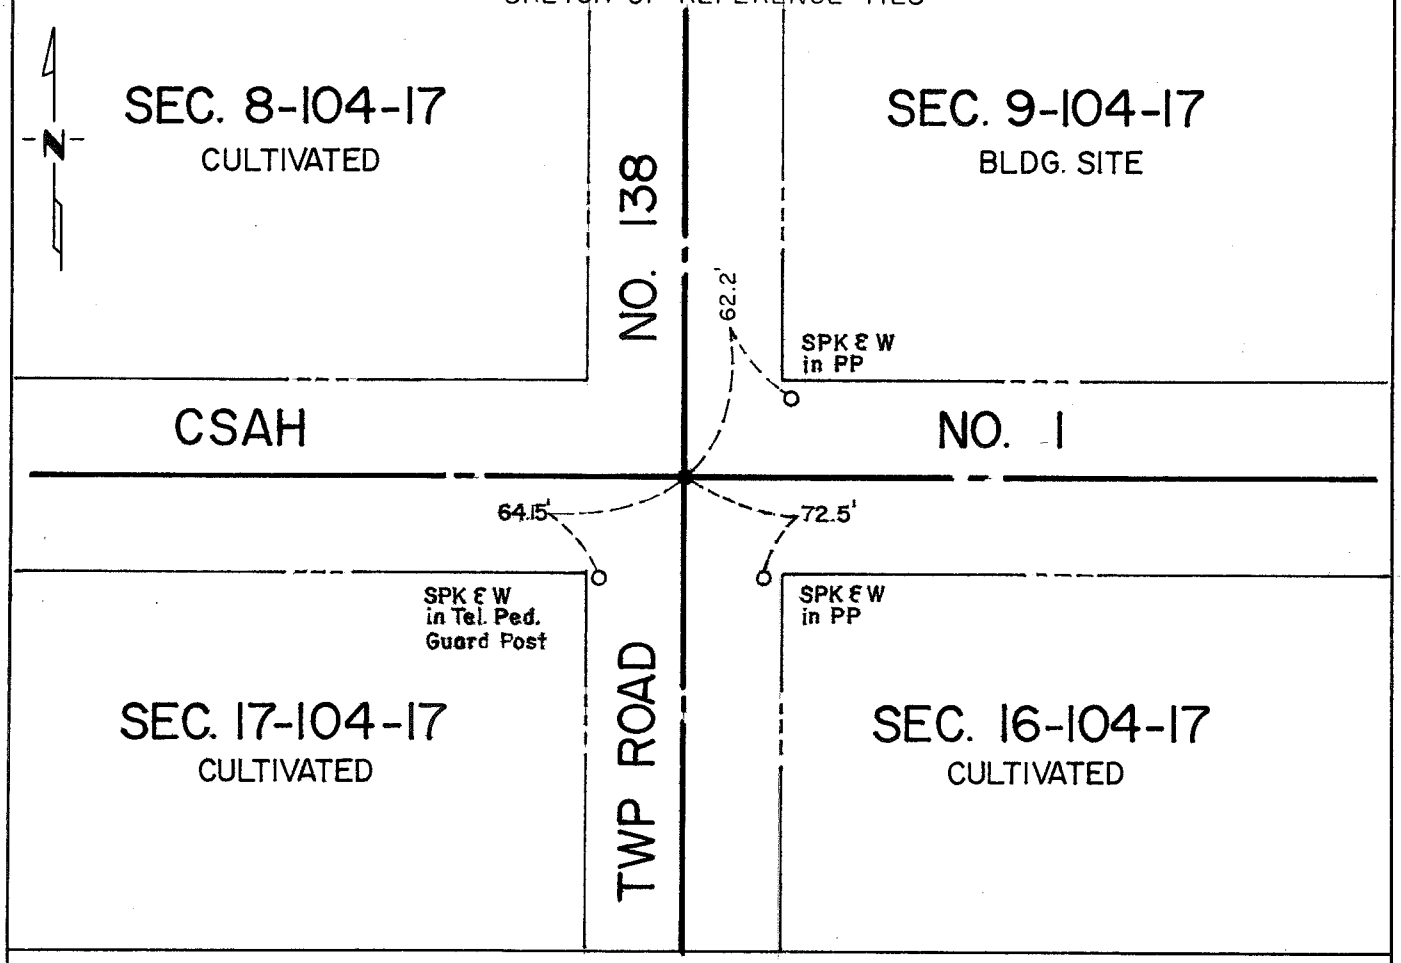

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

_____ 9-17-90
SIGNATURE DATE

Registration No. 13807

☒ Land Surveyor, ☐ Professional Engineer

☐ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER

County of _____

I hereby certify that this document was filed in the County Rec. office at _____ .M. on the _____ day of _____ A.D., 19__

COUNTY RECORDER _____

By _____, Deputy

DOCUMENT NO. _____

M.H.D. FORM NO. 2105

STATEMENT OF EVIDENCE

NW corner Section 16-104-17

This corner was originally established by Deputy Surveyor John Fitzpatrick of the U.S. General Land Survey Office in 1853. The government notes show this corner was marked with a wood post, a stone and a trench with a mound of earth.

The following were contacted for section corner information:

Mower County Engineering Department
Mower County Recorder's Office

1956 Record Book 'A' in the County Engineer's Office shows a concrete monument inplace and the following ties were taken:

PP	SE	72.2 ft
PP	SW	63.8 ft

1990 Jones, Haugh & Smith crew with the Mower County backhoe dug on centerline centerline of north-south-east-west roads and found a 1/2" diameter iron in 6" diameter round concrete monument 3.0 feet below road surface. Reset capped 5/8" diameter iron at road surface over monument found.

Corner found fits road centerlines and is accepted as best evidence and perpetuation of the public land survey corner.

For electronic survey data and analysis contact the firm of Jones, Haugh & Smith Inc.

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

N 1/4 Corner of Section 16, Township 104N, Range 17W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch:

☐ On 9-25-90 (DATE) found a 1/2"Ø iron in concrete 2.5'- deep on ℄ E-W road in line with fence North. and 2' East of 3/4"Ø x 12" found at road surface.

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain) (capped 13807)

☐ On 9-25-90 (DATE) placed a 5/8"Ø iron over concrete monument found.

SKETCH OF REFERENCE TIES

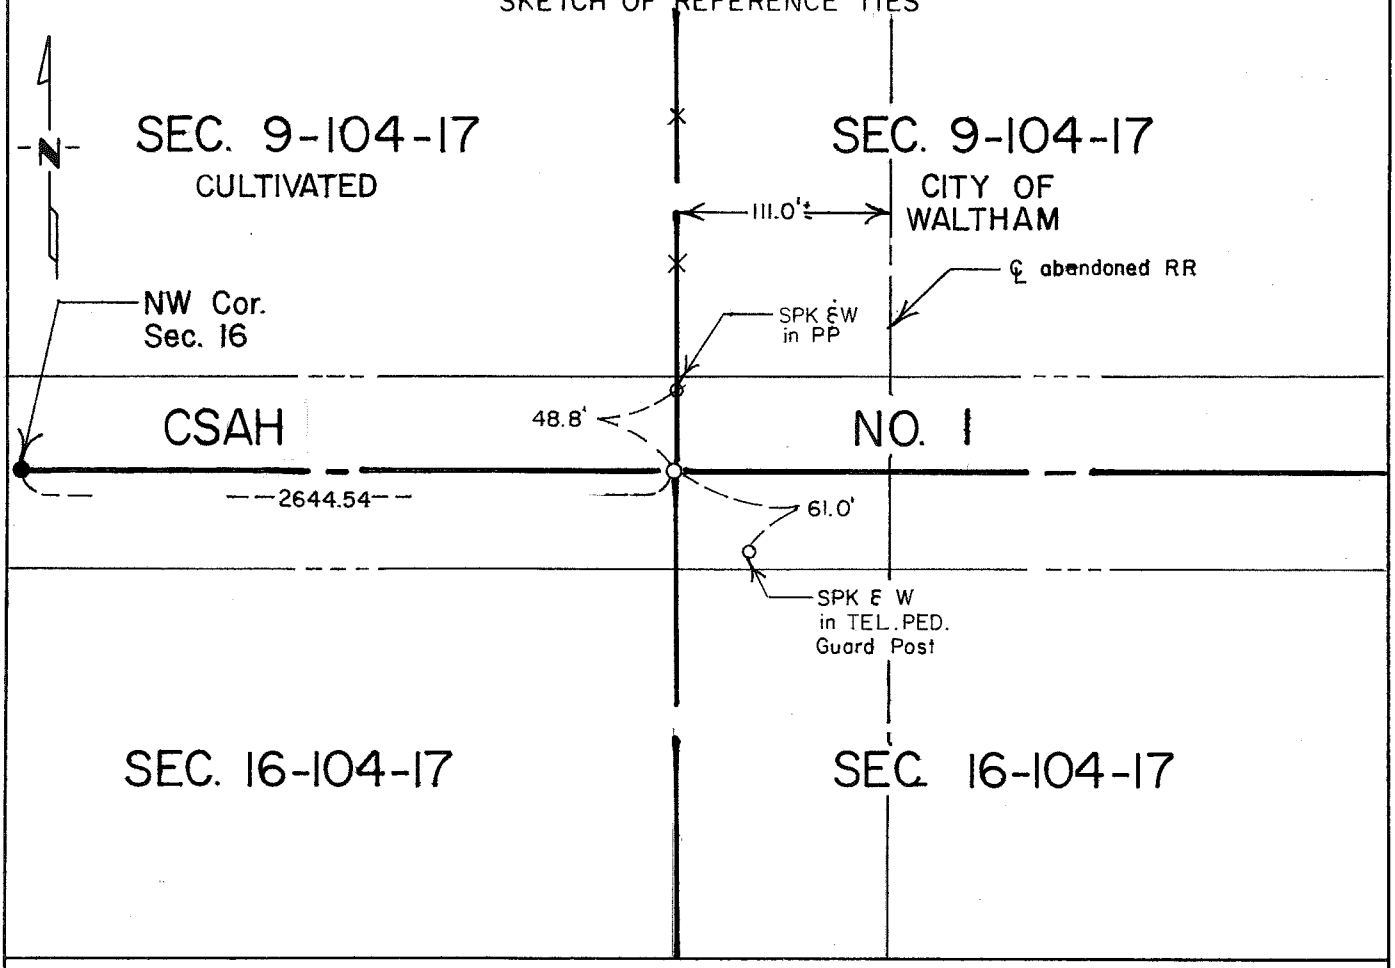

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

SIGNATURE _____ DATE 9-18-90

Registration No. 13807

☒ Land Surveyor, ☐ Professional Engineer

☐ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER

County of _____

I hereby certify that this document was filed in the County Rec. office at _____ .M. on the ____ day of _____ A.D., 19__

COUNTY RECORDER _____

By _____, Deputy

DOCUMENT NO. _____

M.H.D. FORM NO. 2105

STATEMENT OF EVIDENCE

N 1/4 corner Section 16-104-17

This corner was originally established by Deputy Surveyor John Fitzpatrick of the U.S. General Land Survey Office in 1853. The government notes show this corner was marked with a wood post, a stone and a trench with a mound of earth.

The following were contacted for section corner information:

Mower County Engineering Department
Mower County Recorder's Office

1956 Record Book 'A' in the County Engineer's Office shows a concrete monument inplace 110.0 feet west of the centerline railroad tracks.

1990 Jones, Haugh & Smith crew found a 3/4" diameter x 12" iron on road surface. Dug with Mower County backhoe and found 1/2" diameter iron in concrete 2.5 feet more or less deep and 2.0 feet east of iron found on road surface.

Corner found fits occupation and road centerlines with the section and agrees with 1956 records. Concrete monument is accepted as best evidence and perpetuation of the public land survey corner.

For electronic survey data and analysis contact the firm of Jones, Haugh & Smith Inc.

"D" p60, "C" p132

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

N1/4 Corner of Section 16, Township 104N, Range 17W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch:

☒ On 9-25-89 (DATE) found a 1/2" Ø IRON CAST IN 6" DIA. CONC. MONUMENT.

☒ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☒ On 9-25-89 (DATE) placed a 5/8" Ø IRON CAPPED RLS 13807 OVER CONC. MONUMENT ON ROAD SURFACE.

SKETCH OF REFERENCE TIES

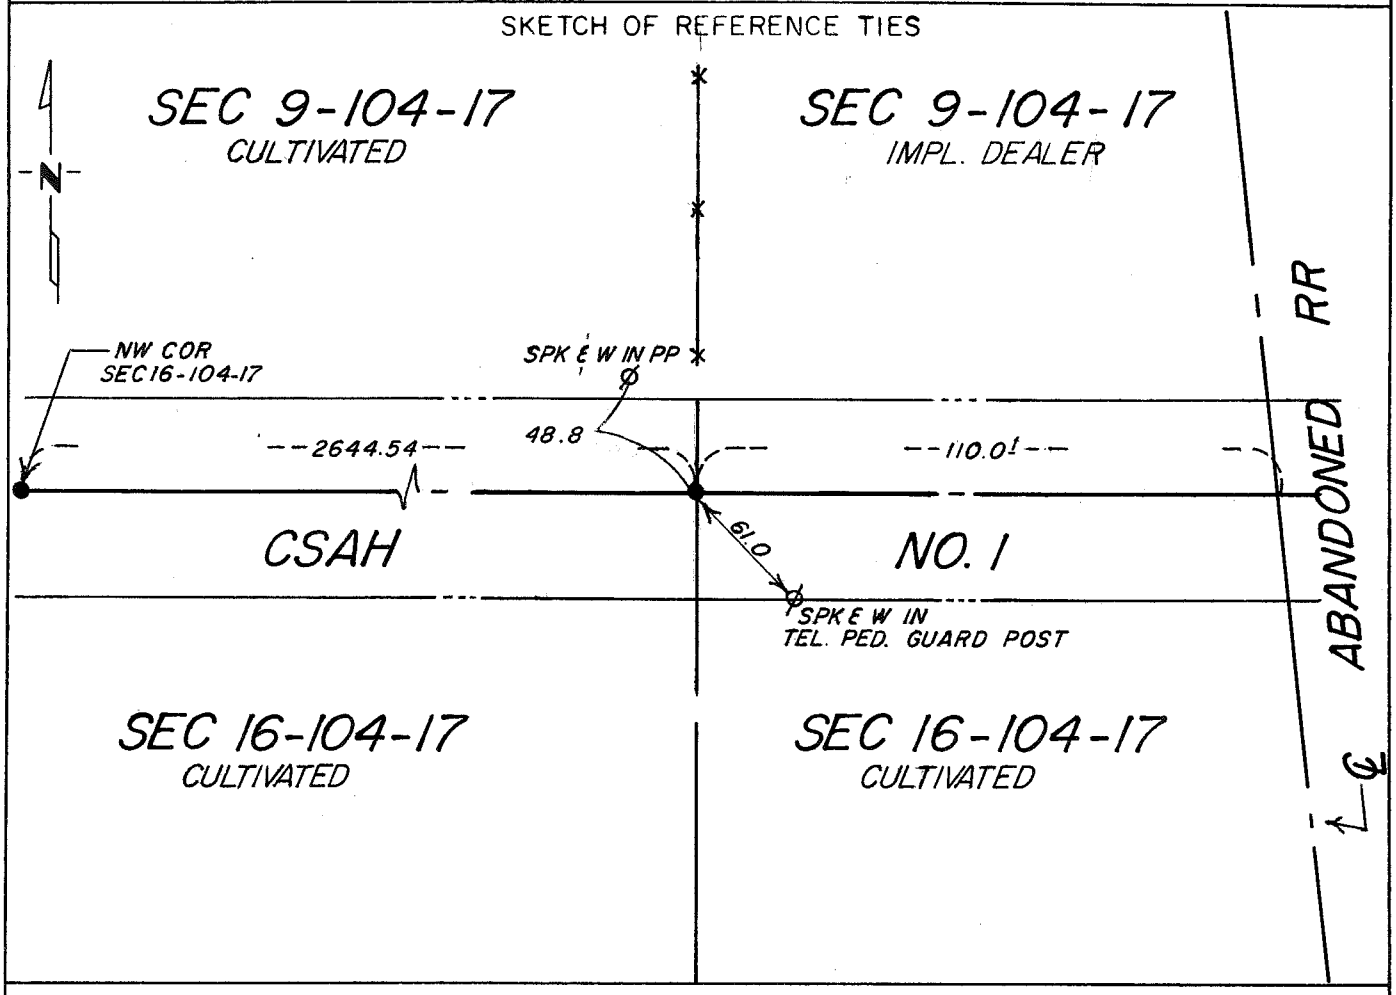

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

[signature] 12-21-89
SIGNATURE DATE

Registration No. 13807

☒ Land Surveyor, ☐ Professional Engineer

☐ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of _____

I hereby certify that this document was filed in the County Rec. office at _____ .M. on the _____ day of _____ A.D., 19__

COUNTY RECORDER _____

By _____, Deputy

DOCUMENT NO. _____

M.H.D. FORM NO. 2105

STATEMENT OF EVIDENCE

N 1/4 corner Section 16-104-17

This corner was originally established by Deputy Surveyor John Fitzpatrick of the United States General Land Office in 1854. The government notes show a wood post was set and a field stone was deposited with a mound of earth and trenches.

The following were contacted for section corner information:

Mower County Highway Department
Mower County Records Office

1930+ Mower County grading plan shows a concrete monument inplace and ties taken during construction project.

1989 Jones, Haugh & Smith Inc. crew together with the Mower County backhoe operator dug a 6'x6'x3' deep hole on the centerline of E-W road in line with fence west and uncovered a 1/2 diameter iron cast in a 6" diameter concrete monument 2.5' below road surface. Placed a 5/8" diameter x 16" iron rebar capped RLS 13807 over concrete monument on road surface.

The monument found fits occupation and road centerlines within the section and is accepted as the original public land survey corner or a perpetuation thereof.

For electronic survey data and analysis, contact firm of Jones, Haugh & Smith.

Index No. "I" P. 60 "P" P132

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

E1/4 Corner of Section 16, Township 104N, Range 17W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch:

☐ On 9-25-89 (DATE) found a 1"Ø iron flush with road surface 8.1' east of T.H. No. 56 ℄.

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On _____ (DATE) placed a _____

SKETCH OF REFERENCE TIES

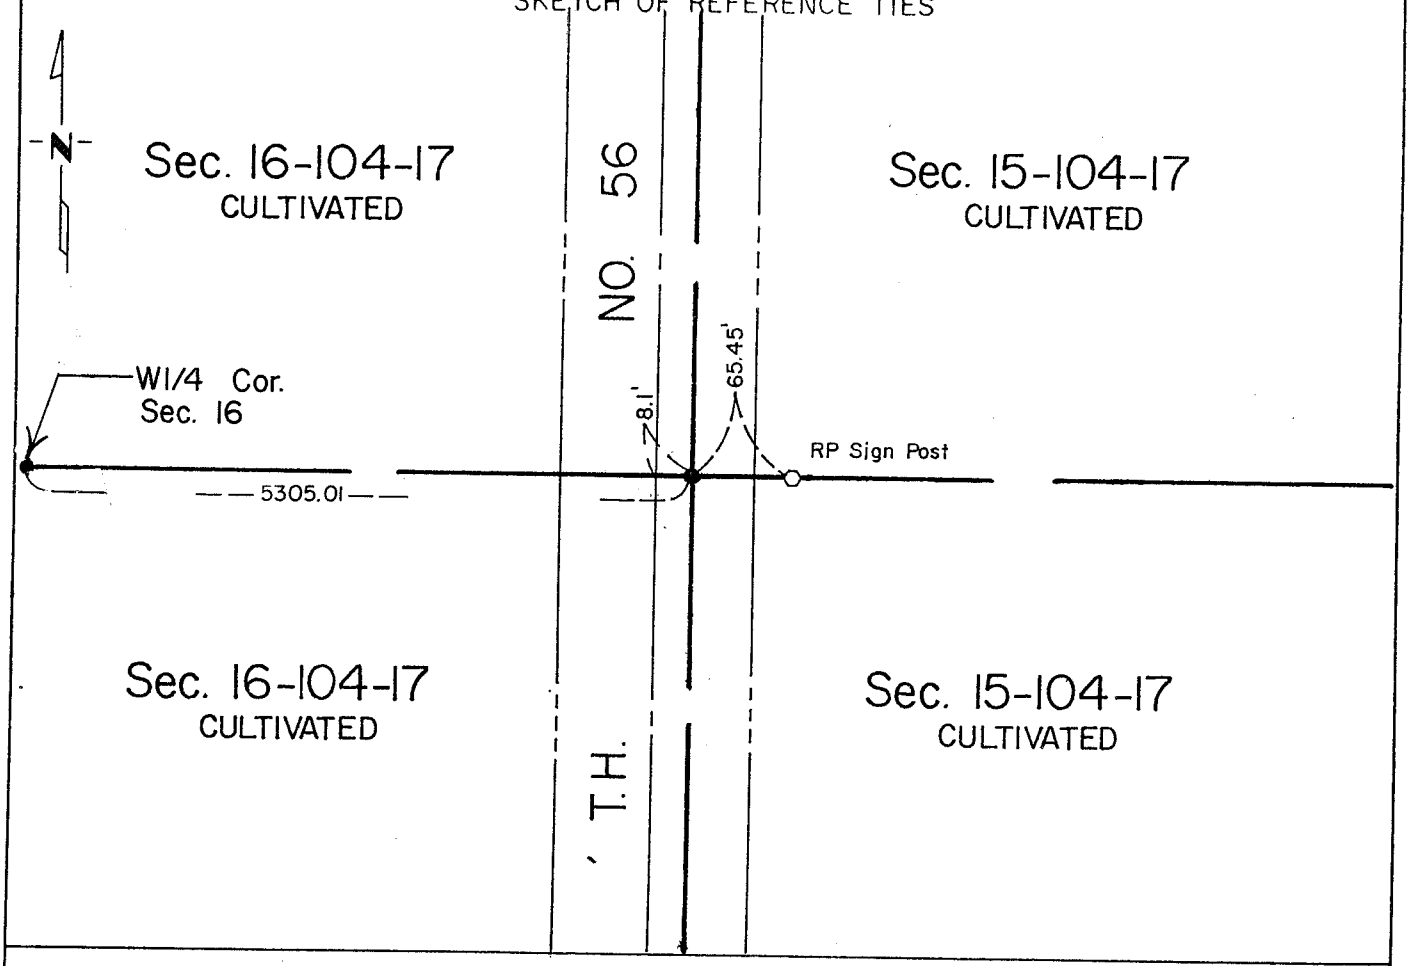

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

SIGNATURE _____ DATE 9-18-90

Registration No. 13807

☒ Land Surveyor, ☐ Professional Engineer

☐ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER

County of _____

I hereby certify that this document was filed in the County Rec. office at _____ .M. on the _____ day of _____ A.D., 19 ___

COUNTY RECORDER _____

By _____, Deputy

DOCUMENT NO. _____

M.H.D. FORM NO. 2105

STATEMENT OF EVIDENCE

E 1/4 corner Section 16-104-17

This corner was originally established by Deputy Surveyor John Fitzpatrick of the U.S. General Land Survey Office in 1853. The government notes show this corner was marked with a wood post and a stone with a trench and a mound of earth.

The following were contacted for section corner information:

Mower County Engineering Department
Mower County Recorder's Office

1940 Mower County Grading Plan shows a 1" diameter iron at this location.

1990 Jones, Haugh & Smith crew found a 1" diameter iron flush with the road surface 8.1 feet east of the centerline of Trunk Highway No. 56.

For electronic survey data and analysis contact the firm of Jones, Haugh & Smith Inc.

Recorded at Register of Deeds 4-21-77 Index No. T12 BOOK P60

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

EAST QUARTER Corner of Section 16, Township 104N, Range 17W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch:

☐ On _____ (DATE) found a _____

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☒ On 9-3-75 (DATE) placed a MINNESOTA HIGHWAY DEPARTMENT CAST IRON MONUMENT DOWN ½ INCH.

SKETCH OF REFERENCE TIES

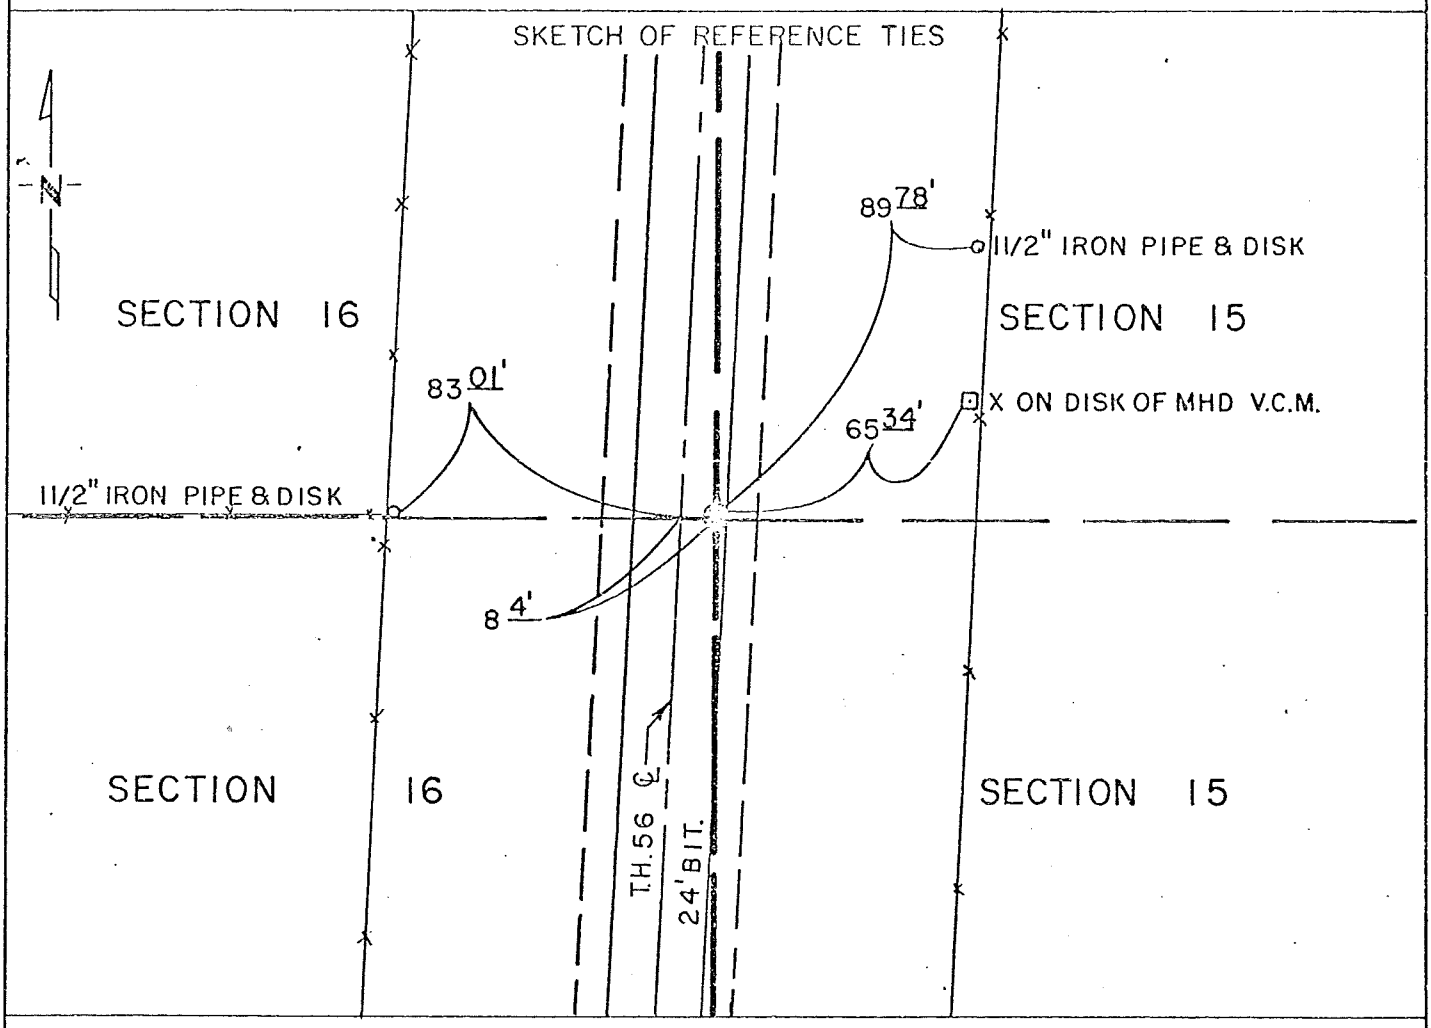

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

Ronald R Rukuding 9/8/75
(SIGNATURE) (DATE)

Registration No. 10162

☒ Land Surveyor, ☐ Professional Engineer

☐ County Surveyor, ☐ County Engineer

OFFICE OF THE REGISTER OF DEEDS
County of _____

I hereby certify that this document was filed in the Reg. of Deeds office at _____ .M. on the _____ day of _____ A.D., 19 ___

Register of Deeds _____

By _____, Deputy

DOCUMENT NO. _____

M.H.D. FORM NO. 2105

Statement of Evidence:

EAST QUARTER CORNER, SECTION 16, TOWNSHIP 104N, RANGE 17W, 5th P.M.

November 1853 — John Fitzpatrick, Deputy Surveyor, set post, made a mound of earth and sod with trench and pits and deposited stone for the corner during the Original Public Land Survey.

July 1929 — C. Aasland, Minnesota Highway Department Engineer, found a stone 8.4 feet east of POT 1287+96 for the corner.

1975 — Minnesota Highway Department placed a cast iron monument for the corner 1/2 inch below the surface, 8.4 feet east of POT 1287+96.0.

An analysis of the record and survey data indicates that the stone found in 1929 fits the occupation lines. This position is accepted as a perpetuation of the Public Land Survey Corner.

For details of the survey data, contact the Minnesota Highway Department's District Surveying and Mapping Section, Rochester.

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

S 1/4 Corner of Section 16, Township 104 Range 17, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch

☐ On – (DATE) found a –

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 10/04/1995 (DATE) placed a CAST IRON MONUMENT IN CENTER OF ROCK PILE

SKETCH OF REFERENCE TIES

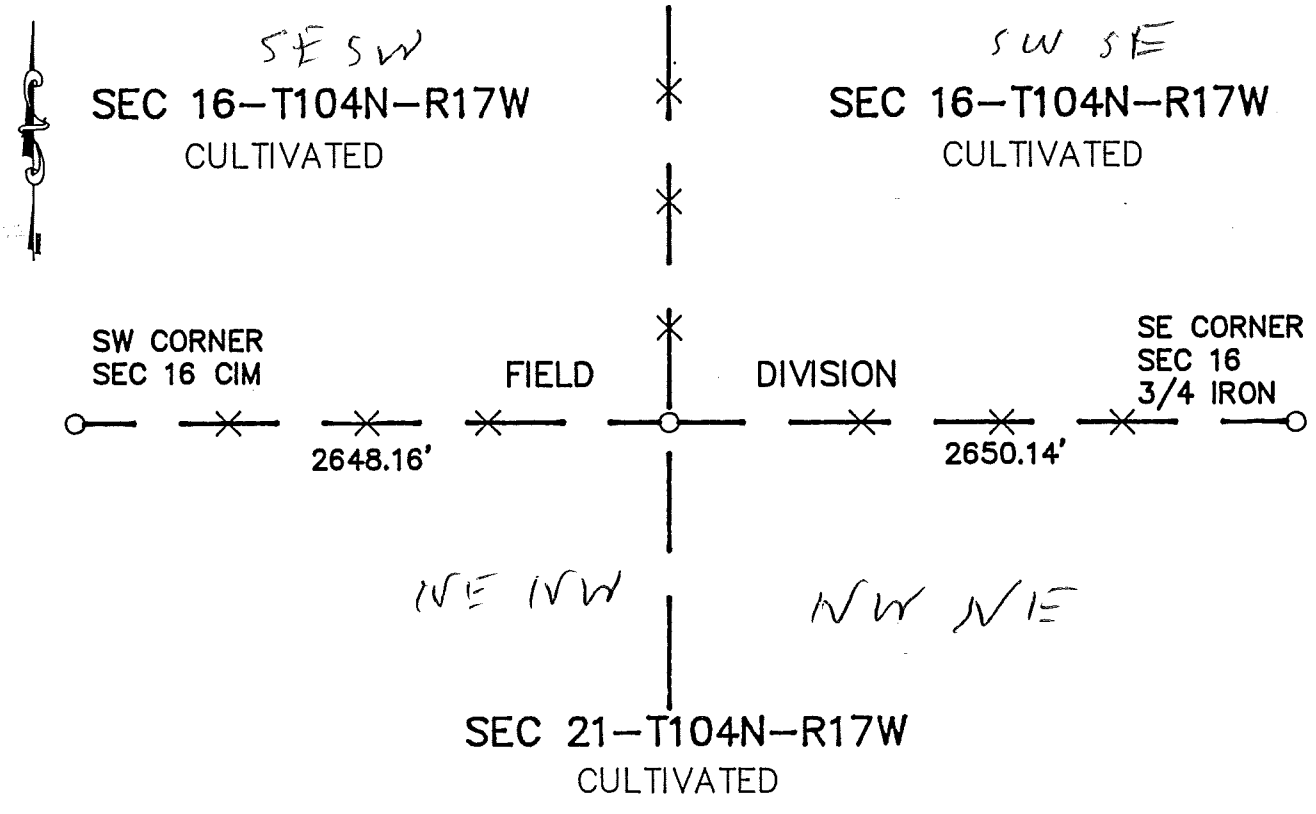

JONES, HAUGH & SMITH INC
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein were prepared by me or under my direct supervision.

_____ (SIGNATURE) 12-27-95 (DATE)

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☒ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of Mower

I hereby certify that this document was filed in the County Rec. office at 2 P.M. on the 3 day of Jan A.D., 1996

COUNTY RECORDER Charles Evgen

By Susan M. Davis, Deputy

DOCUMENT NO. 441733

M.H.D. FORM NO. 2105 BOOK 89 PAGE 580 Book 89 Misc Page 580

S 1/4 Cor SEC 16-104-17

This corner was originally established by Deputy Surveyor John Fitzpatrick of the U.S. General Land Office in 1853. The government notes show a wood post was set.

The following were contacted for section corner information.

Mower County Highway Dept.
Mower County Recorder
Zenk Engineering
Tucker Land Surveying

No record of this corner was obtained from the above mentioned offices.

1995 Jones, Haugh and Smith crew, under direction of John Schulte, Mower County Surveyor RLS 13807, dug by hand at the intersection of fence N-S and Fence E-W. No evidence of the original corner was found. A cast iron monument was placed in the center of the rock pile.

The monument fit occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

For electronic survey data and analysis, contact the firm of Jones, Haugh and Smith Inc.

"I" Index No. TIC BOOK p.60

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

NORTHEAST Corner of Section 16, Township 104N, Range 17W, 5th P.M.

STATE OF MINNESOTA, County of NICER


At the corner location shown on the sketch:

☐ On _____ (DATE) found a _____

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☒ On 4-29-75 (DATE) placed a MHD CAST IRON MONUMENT 1/2 INCH DOWN.

SKETCH OF REFERENCE TIES

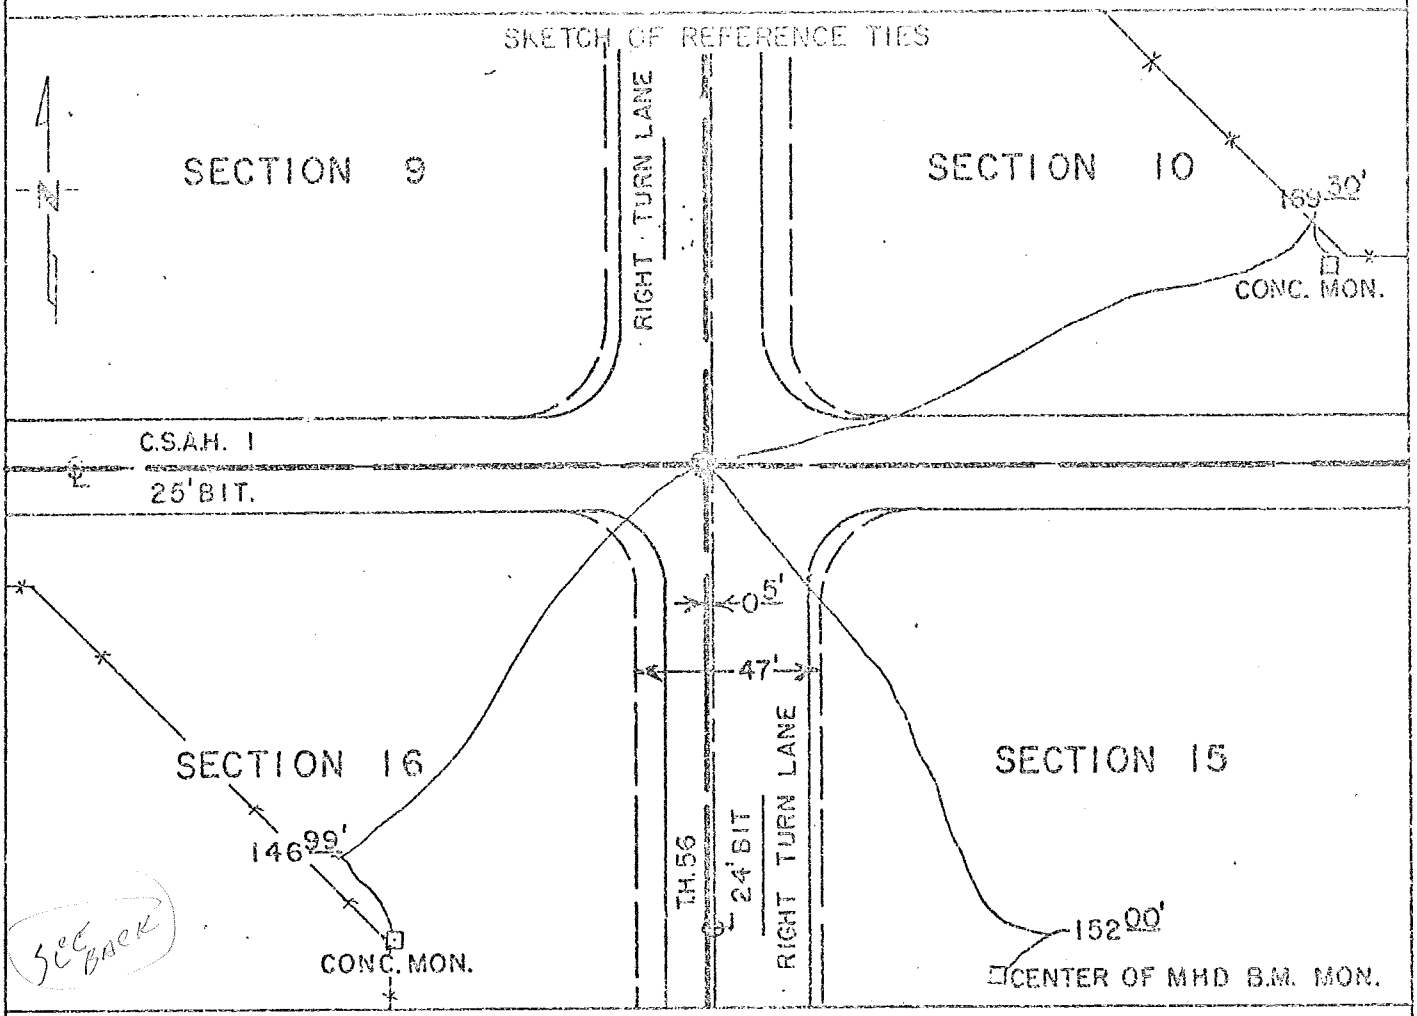

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

Donald R. Rathsburg 9/8/75
SIGNATURE DATE

Registration No. 10162

☒ Land Surveyor, ☐ Professional Engineer

☐ County Surveyor, ☐ County Engineer

OFFICE OF THE REGISTER OF DEEDS
County of _____

I hereby certify that this document was filed in the Reg. of Deeds office at _____ .M. on the _____ day of _____ A.D., 19__

Register of Deeds _____

By _____, Deputy

DOCUMENT NO. _____

M.H.D. FORM NO. 2105

Statement of Evidence:

NORTHEAST CORNER OF SECTION 16, TOWNSHIP 104N, RANGE 17 W, 5th P.M.

November 1853 — John Fitzpatrick, Deputy Surveyor, set post, deposited stone, made a mound of earth and sod with trench and pits for the corner during the Original Public Land Survey.

July 1929 — C. Aasland, M.H.D. Engineer, found a red stake 0.5 foot west of PI 1314+30.7 for the corner replaced with a 3/4 inch gas pipe on May 5, 1930.

1941 — O. J. Gerner, M.H.D. Engineer, found an iron pipe 0.5 foot west of PI 1314+30.7 inplace 6 inches below surface.

1955 — E. L. Pehrson, M.H.D. Engineer, shows ties to the corner 0.5 foot west of the PI 1314+30.7. MBD regraded T.H. 56.

July 1972 — M.H.D. field searched the area 0.5 foot west of the PI 1314+30.7, but found nothing.

April 1975 — M.H.D. placed a cast iron monument 1/2 inch below the surface 0.5 foot west of the PI 1314+30.7 for the corner.

An analysis of the record data indicates the 3/4 inch gas pipe, which was set in 1930 to replace the red stake found in 1929, was destroyed by road construction in 1955. The Cast Iron Monument was set from the alignment ties to the 3/4 inch gas pipe and is accepted as a perpetuation of the Public Land Survey Corner.

For details of the survey data, contact the Minnesota Highway Department's District Surveying and Mapping Section, Rochester.

7/20/77 FD CAST IRON MON 1.5' W. OF ℄
FD 1" IRON ROD 1.0' W. OF ℄

J. R. Haakenson
Mower Co Highway Dept

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

SE Corner of Section 17, Township 104 Range 17, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch

☐ On 10/04/1995 (DATE) found a 1.2'X 8' POINTED STONE

☒ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 10/04/1995 (DATE) placed a CAST IRON MONUMENT

SKETCH OF REFERENCE TIES

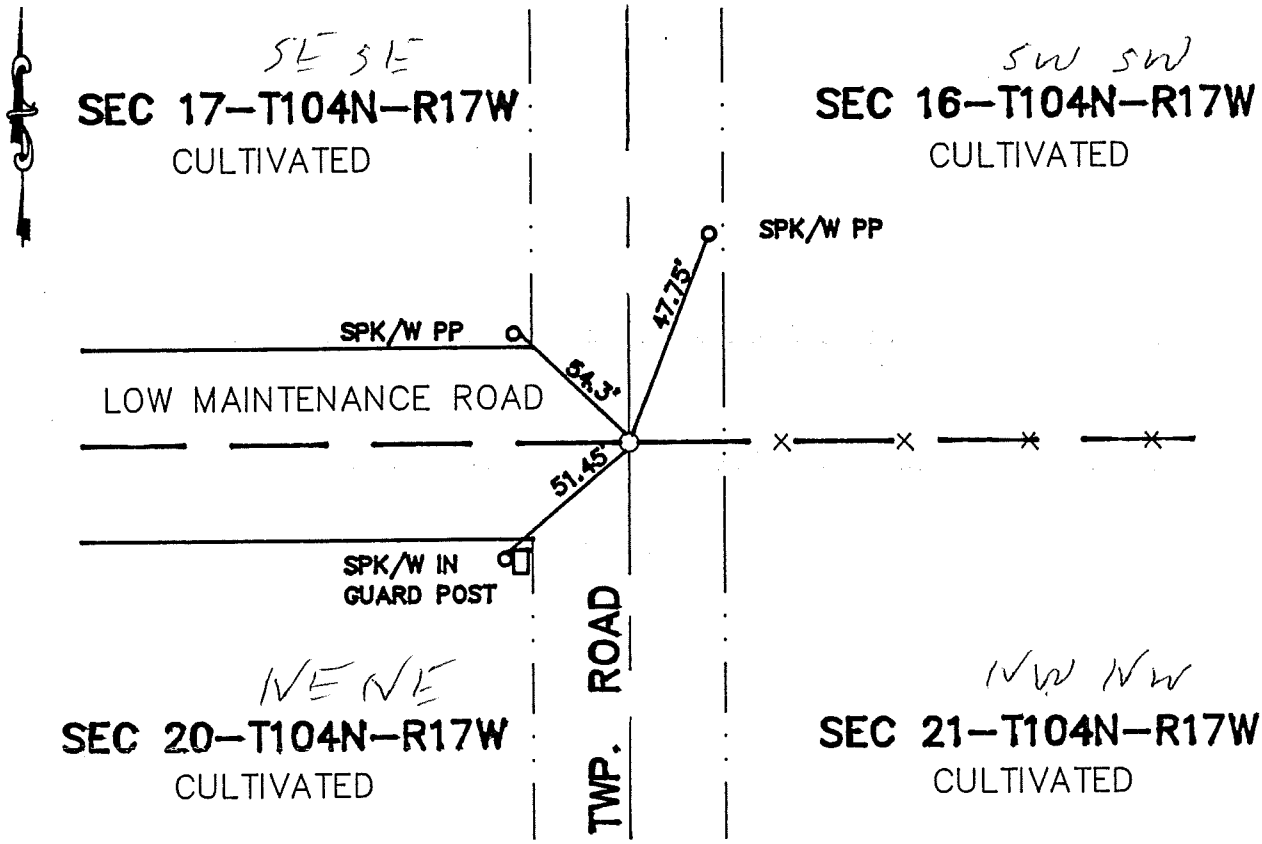

JONES, HAUGH & SMITH INC
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein were prepared by me or under my direct supervision.

SIGNATURE _____ DATE 1-5-96

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☒ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of Mower

I hereby certify that this document was filed in the County Rec. office at 2 P .M. on the 8 day of Jan A.D., 1996

COUNTY RECORDER Charles Engen

By Susan M. Davis, Deputy

DOCUMENT NO. 441815

M.H.D. FORM NO. 2105 BOOK 90 PAGE 13 Book 90 Misc Pg 13

SE Cor SEC 17-104-17

This corner was originally established by Deputy Surveyor John Fitzpatrick of the U.S. General Land Office in 1853. The government notes show a stone was placed with a mound of earth and trench.

The following were contacted for section corner information.

Mower County Highway Dept.
Mower County Recorder
Zenk Engineering
Tucker Land Surveying

No record of this corner was obtained from the above mentioned offices.

1995 Jones, Haugh and Smith crew, under direction of John Schulte, Mower County Surveyor RLS 13807, dug with county backhoe at the CL of township road N-S and on CL of low maintenance road West. Found a 1.2'x8" pointed stone. Stone fit CL of N-S road and 3' North of low maintenance road. Stone found .5' below old road bed. Accepted stone as true corner. Left stone as found a place a cast iron monument over stone found.

The monument fit occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

For electronic survey data and analysis, contact the firm of Jones, Haugh and Smith Inc.

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

S 1/4 Corner of Section 17, Township 104 Range 17, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch

☐ On – (DATE) found a –

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 10/04/1995 (DATE) placed a CAST IRON MONUMENT

SKETCH OF REFERENCE TIES

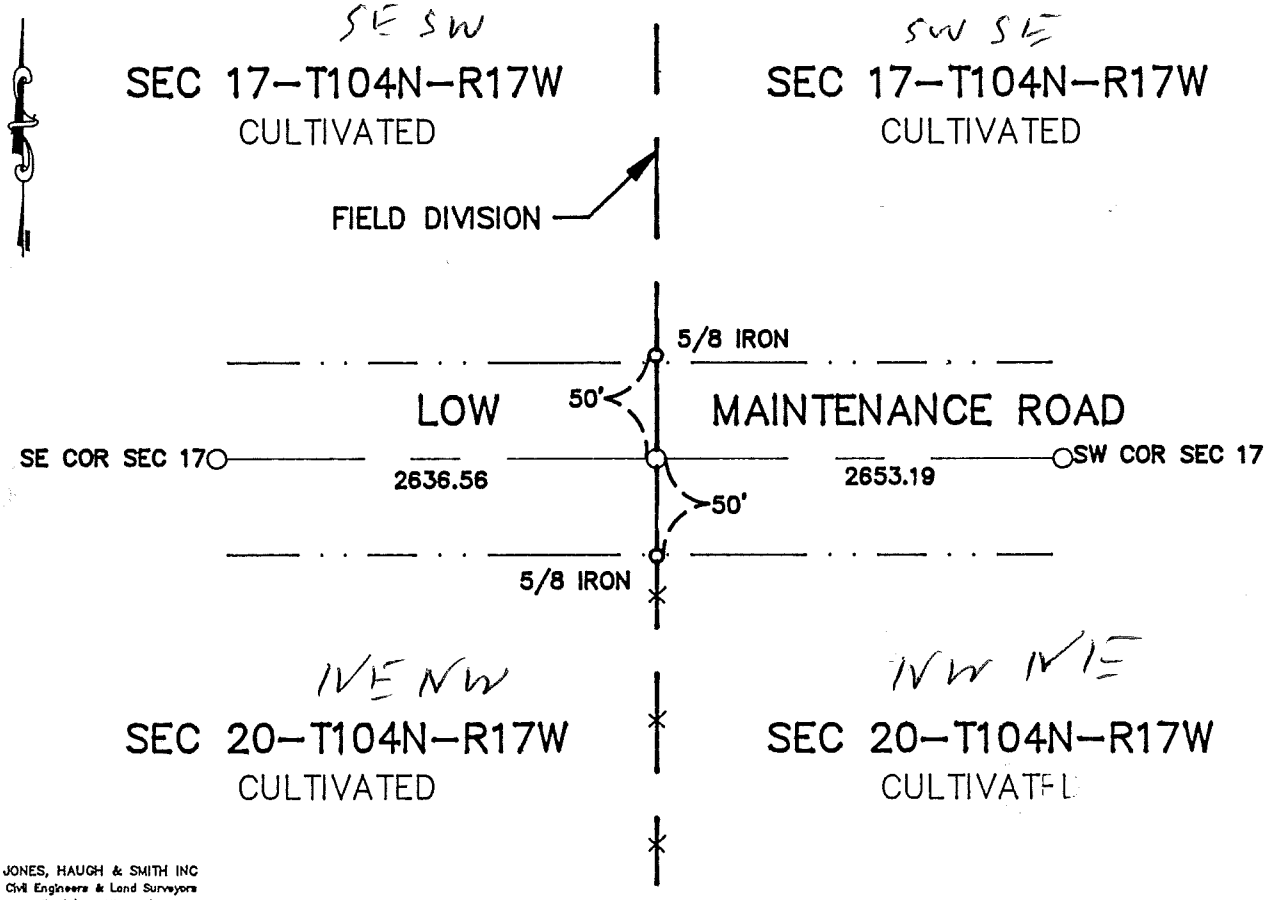

JONES, HAUGH & SMITH INC
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein were prepared by me or under my direct supervision.

SIGNATURE _____ DATE 12-27-95

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☒ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of Mower

I hereby certify that this document was filed in the County Rec. office at 2 P.M. on the 3 day of Jan A.D., 1996

COUNTY RECORDER Charles Enger
By Susan M. Davis, Deputy
DOCUMENT NO. 441734

M.H.D. FORM NO. 2105 BOOK 89 PAGE 582 Book 89 Misc Page 582

S 1/4 Cor SEC 17-104-17

This corner was originally established by Deputy Surveyor John Fitzpatrick of the U.S. General Land Office in 1853. The government notes show a wood post was set with a mound of earth and trench.

The following were contacted for section corner information.

Mower County Highway Dept.
Mower County Recorder
Zenk Engineering
Tucker Land Surveying

No record of this corner was obtained from the above mentioned offices.

1995 Jones, Haugh and Smith crew, under direction of John Schulte, Mower County Surveyor RLS 13807, placed a cast iron monument on straight line between SE corner and SW corner in line with line fence South and field division North.

The monument fit occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

For electronic survey data and analysis, contact the firm of Jones, Haugh and Smith Inc.

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

N1/4 Corner of Section 17, Township 104N Range 17W, 5TH P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch:

☐ On 10-9-92 (DATE) found a NOTHING

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 5-29-93 (DATE) placed a CAST IRON MONUMENT

SKETCH OF REFERENCE TIES

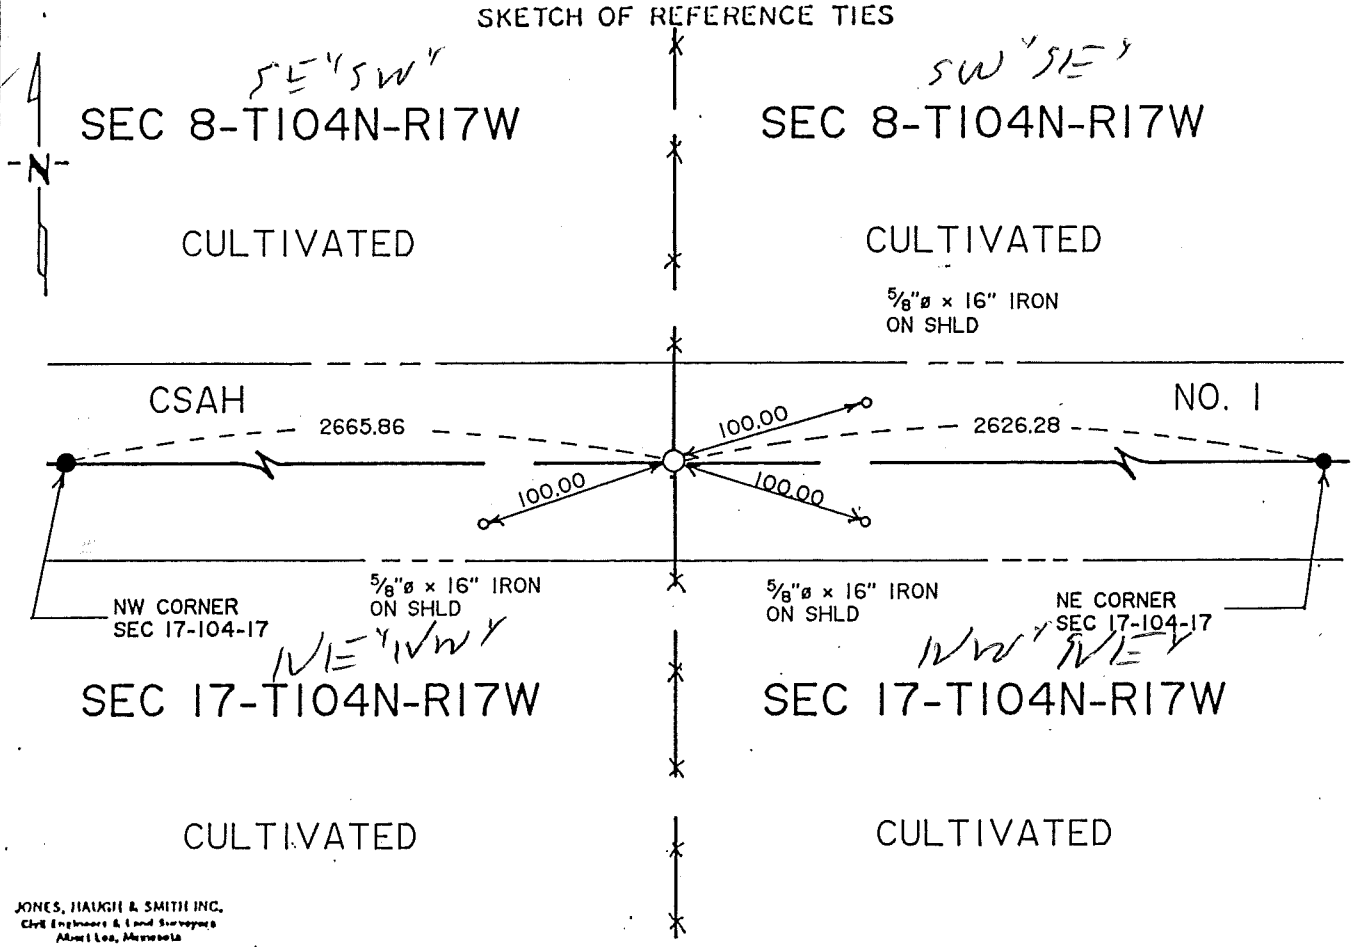

JONES, HAUGH & SMITH INC.
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

SIGNATURE _____ DATE 6-10-93

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☑ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of Mower

I hereby certify that this document was filed in the County Rec. office at 4 P.M. on the 24 day of June A.D., 1993

COUNTY RECORDER Charlene Engen

By Marlene Martin, Deputy

DOCUMENT NO. 121781

BOOK 80 PAGE 121

M.H.D. FORM NO. 2105

STATEMENT OF EVIDENCE

N 1/4 cor Sec 17-104-17

This corner was originally established by Deputy Surveyor John Fitzpatrick of the U.S. General Land Office in 1853. The government notes show a stone was set with a mound of earth and trench.

The following were contacted for section corner information:
Mower County Highway Department
Mower County Recorder
Zenk Engineering
Tucker Land Surveying

The following information was obtained to support evidence of the perpetuation of the original public land survey corner.

1890 Clausen, Mower County Surveyor, notes indicate a government post at this corner.

1993 Jones, Haugh & Smith Inc crew under the direction of John H. Schulte IV, RLS 13807, found using information from County State Aid Highway No. 1 Road Plans that the location of the original public land survey corner was core cut which would have destroyed all perpetuation of the corner and the original public land survey corner. Therefore we set this corner on a straight line between the northwest corner and northeast corner of Section 17 and also in line with the north-south line fences.

The monument set fits occupation lines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

S 1/4 Corner of Section 18, Township 104 Range 17, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch

☐ On – (DATE) found a –

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 08/15/1995 (DATE) placed a CAST IRON MONUMENT

SKETCH OF REFERENCE TIES

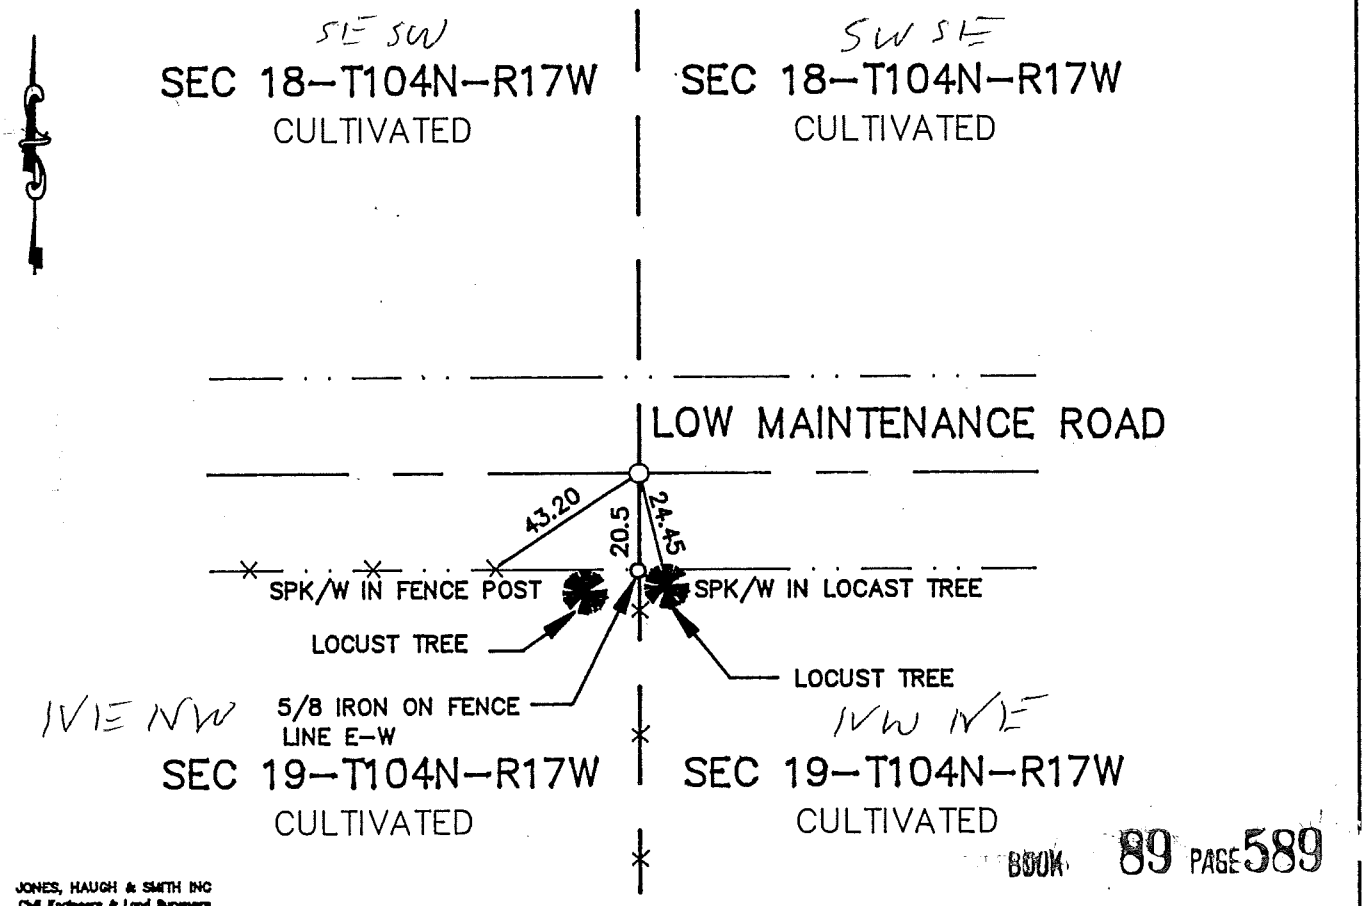

JONES, HAUGH & SMITH INC
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

BOOK 89 PAGE 589

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein were prepared by me or under my direct supervision.

SIGNATURE _____ DATE 12-27-95

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☒ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of Mower

I hereby certify that this document was filed in the County Rec. office at 2 P.M. on the 4 day of Jan A.D., 1996

COUNTY RECORDER Charles Ingen
By Susan M. Davis, Deputy
DOCUMENT NO. 441758

M.H.D. FORM NO. 2105

Book 89 Misc Page 589

S 1/4 Cor SEC 18-104-17

This corner was originally established by Deputy Surveyor John Fitzpatrick of the U.S. General Land Office in 1853. The government notes show a wood post along with stone was set with a mound of earth and trench.

The following were contacted for section corner information.

Mower County Highway Dept.
Mower County Recorder
Zenk Engineering
Tucker Land Surveying

No record of this corner was obtained from the above mentioned offices.

1995 Jones, Haugh and Smith crew, under direction of John Schulte, Mower County Surveyor RLS 13807, dug with county backhoe at CL of low maintenance road and found no evidence of true corner. Set cast iron monument in line with fence South, field division North, and on CL of low maintenance road.

The monument fit occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

For electronic survey data and analysis, contact the firm of Jones, Haugh and Smith Inc.

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

W 1/4 Corner of Section 18, Township 104 Range 17, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch

☐ On 07/13/1995 (DATE) found a CAST IRON BOLTED TO 2"X2" TUBING

☒ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 07/13/1995 (DATE) placed a CAST IRON MONUMENT ON WEST SIDE OF ROCK

SKETCH OF REFERENCE TIES

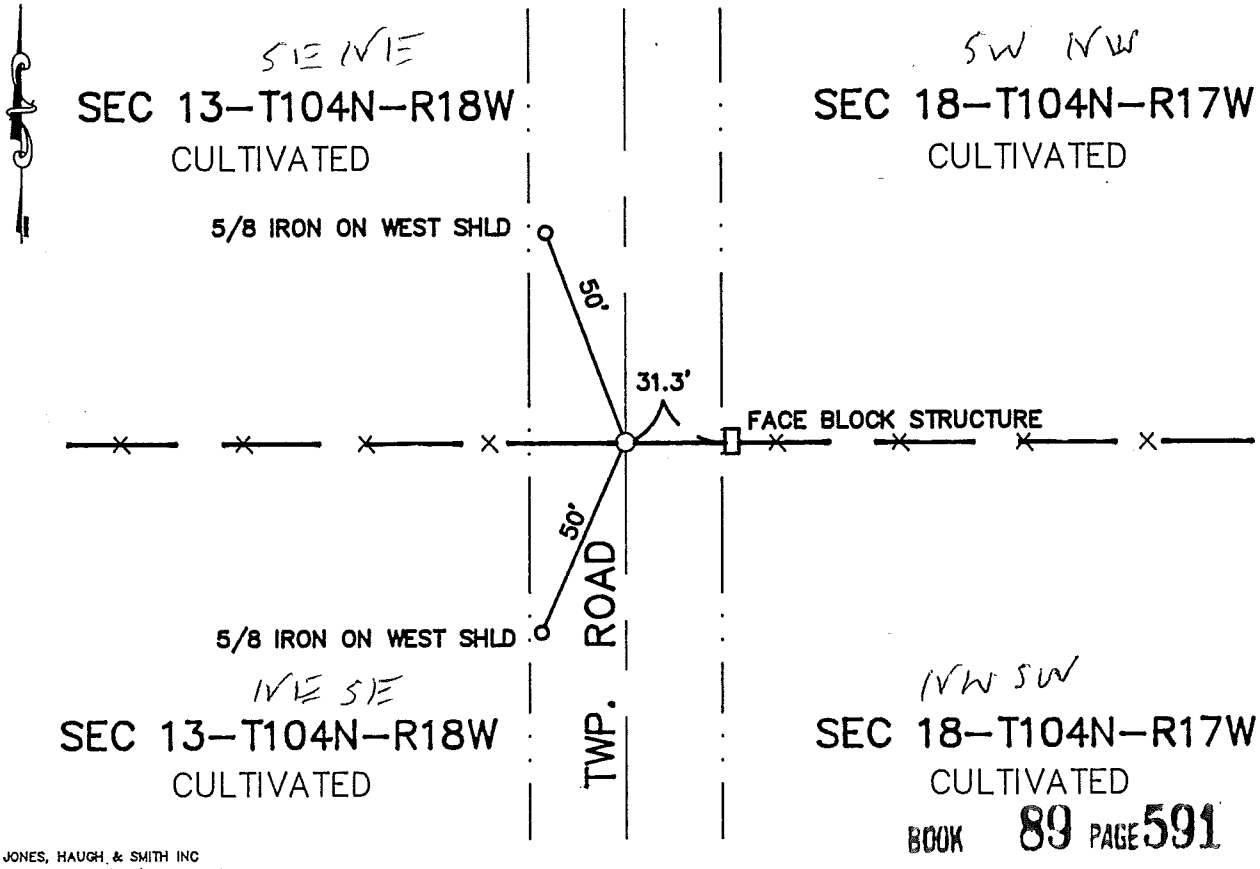

JONES, HAUGH & SMITH INC
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein were prepared by me or under my direct supervision.

SIGNATURE _____ DATE 12-27-95

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☒ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of Mower

I hereby certify that this document was filed in the County Rec. office at 2 P.M. on the 4 day of Jan A.D., 1996

COUNTY RECORDER Charles Enger

By Susan M. Davis, Deputy

DOCUMENT NO. 441759

M.H.D. FORM NO. 2105

Book 89 Misc Page 591

W 1/4 Cor SEC 18-104-17

This corner was originally established by Deputy Surveyor John Fitzpatrick of the U.S. General Land Office in 1853. The government notes show a wood post was set with a mound of earth and trench.

The following were contacted for section corner information.

Mower County Highway Dept.
Mower County Recorder
Zenk Engineering
Tucker Land Surveying

No record of this corner was obtained from the above mentioned offices.

1995 Jones, Haugh and Smith crew, under direction of John Schulte, Mower County Surveyor RLS 13807, dug with county backhoe at the CL of road N-S and fence E-W. Found a cast iron monument bolted to a 2"x2" square tubing 3' long. Continued digging and found a 2'x1' stone. Cast iron monument was set on the West side of the stone. Dug to virgin soil and found no other evidence. Accepted monument as true corner. Left monument as found 6" +- below the road surface.

The monument fit occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

For electronic survey data and analysis, contact the firm of Jones, Haugh and Smith Inc.

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

E 1/4 Corner of Section 18, Township 104N Range 17W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch

☐ On – (DATE) found a –

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 07/14/1995 (DATE) placed a CAST IRON MONUMENT

SKETCH OF REFERENCE TIES

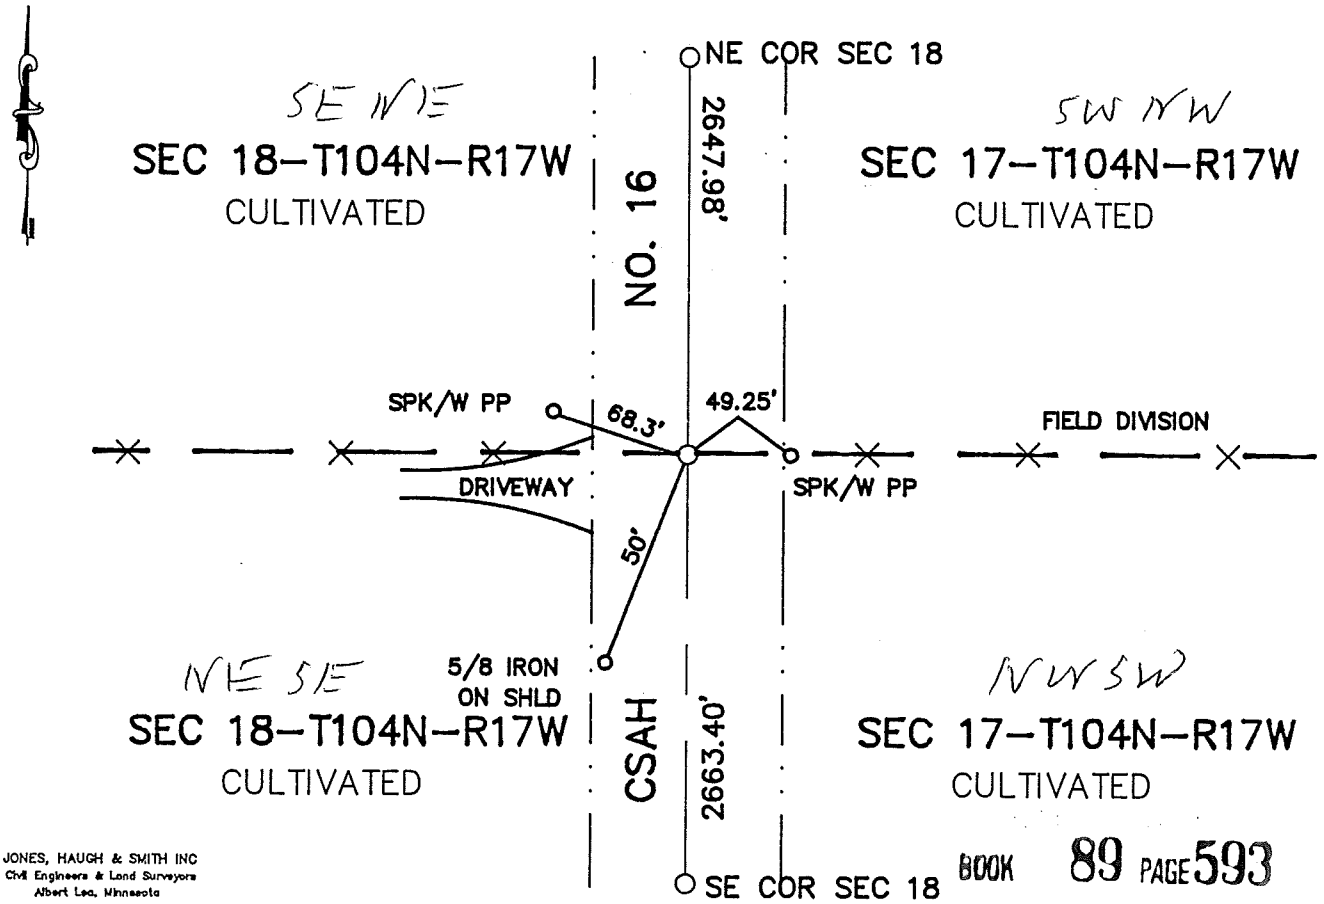

JONES, HAUGH & SMITH INC
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

BOOK 89 PAGE 593

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein were prepared by me or under my direct supervision.

SIGNATURE _____ DATE 12-27-95

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☒ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of Mower

I hereby certify that this document was filed in the County Rec. office at 2 p .M. on the 4 day of Jan A.D., 1996

COUNTY RECORDER Charles Engen

By Susan M. Davis, Deputy

DOCUMENT NO. 441760

M.H.D. FORM NO. 2105

Book 89 Misc Page 593

E 1/4 Cor SEC 18-104-17

This corner was originally established by Deputy Surveyor John Fitzpatrick of the U.S. General Land Office in 1854. The government notes show a wood post was set with a mound of earth and trench.

The following were contacted for section corner information.

Mower County Highway Dept.
Mower County Recorder
Zenk Engineering
Tucker Land Surveying

No record of this corner was obtained from the above mentioned offices.

1995 Jones, Haugh and Smith crew, under direction of John Schulte, Mower County Surveyor RLS 13807, dug with county backhoe at the CL of CSAH No. 16 and in line with field division East. Found no evidence of original PLS corner. Set corner in a straight line between SE sec. corner and NE sec. corner on CL of road and in line with field divisions East and West. County road plans show a distance of 5312.40' between section corners vs. our found distance of 5311.38'.

The monument fit occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

For electronic survey data and analysis, contact the firm of Jones, Haugh and Smith Inc.

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

SW Corner of Section 18, Township 104N Range 17W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch

☐ On 07/13/1995 (DATE) found a –

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 07/13/1995 (DATE) placed a CAST IRON MONUMENT

SKETCH OF REFERENCE TIES

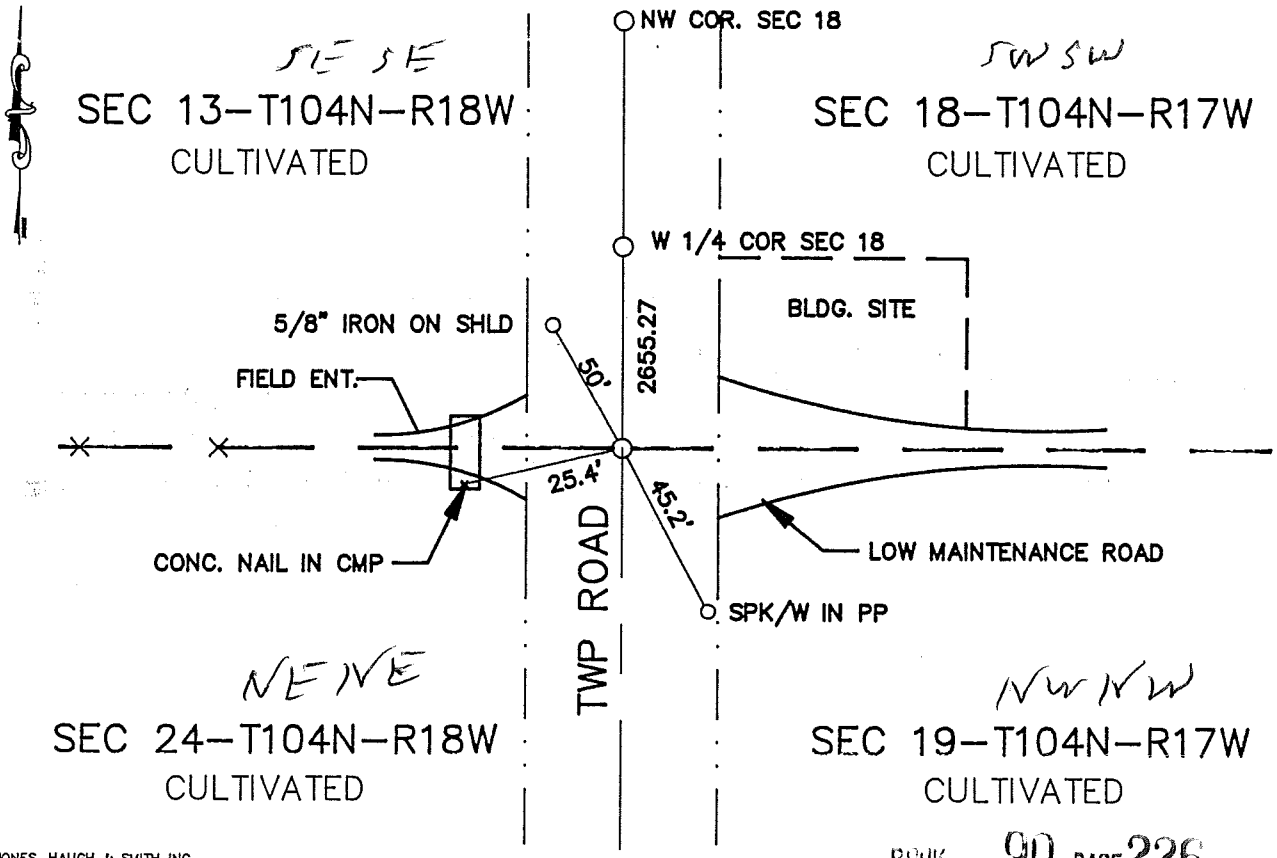

JONES, HAUGH & SMITH INC
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

BOOK 90 PAGE 226

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein were prepared by me or under my direct supervision.

SIGNATURE _____ DATE 2-13-96

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☑ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of Mower

I hereby certify that this document was filed in the County Rec. office at 4 P.M. on the 15 day of Feb A.D., 1996

COUNTY RECORDER Charles Engen

By Susan M. Davis, Deputy

DOCUMENT NO. 142562

M.H.D. FORM NO. 2105

Book 90 Misc Page 226

SW Cor SEC 18-104-17

This corner was originally established by Deputy Surveyor Elisha S. Norris of the U.S. General Land Office in 1853. The government notes show a wood post was set.

The following were contacted for section corner information.

Mower County Highway Dept.
Mower County Recorder
Zenk Engineering
Tucker Land Surveying

No record of this corner was obtained from the above mentioned offices.

1995 Jones Haugh and Smith crew, under direction of John Schulte, Mower County Surveyor RLS 13807, dug with county backhoe at the CL of township road N-S in line with line fence West and with low maintenance road East. Dug 4.5' deep and found no evidence of PLS corner. Placed a cast iron monument on a southerly extension of a straight line between the W 1/4 corner and the NW corner of section 18. Corner fits CL of road and is in line with line fence West and low maintenance road East.

The monument fit occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

For electronic survey data and analysis, contact the firm of Jones, Haugh and Smith Inc.

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

SE Corner of Section 18, Township 104N Range 17W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch

☐ On 07/14/1995 (DATE) found a 6" TILE FILLED WITH CONC. WITH 3/4" IRON IN SIDE

☒ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 07/14/1995 (DATE) placed a CAST IRON MONUMENT

SKETCH OF REFERENCE TIES

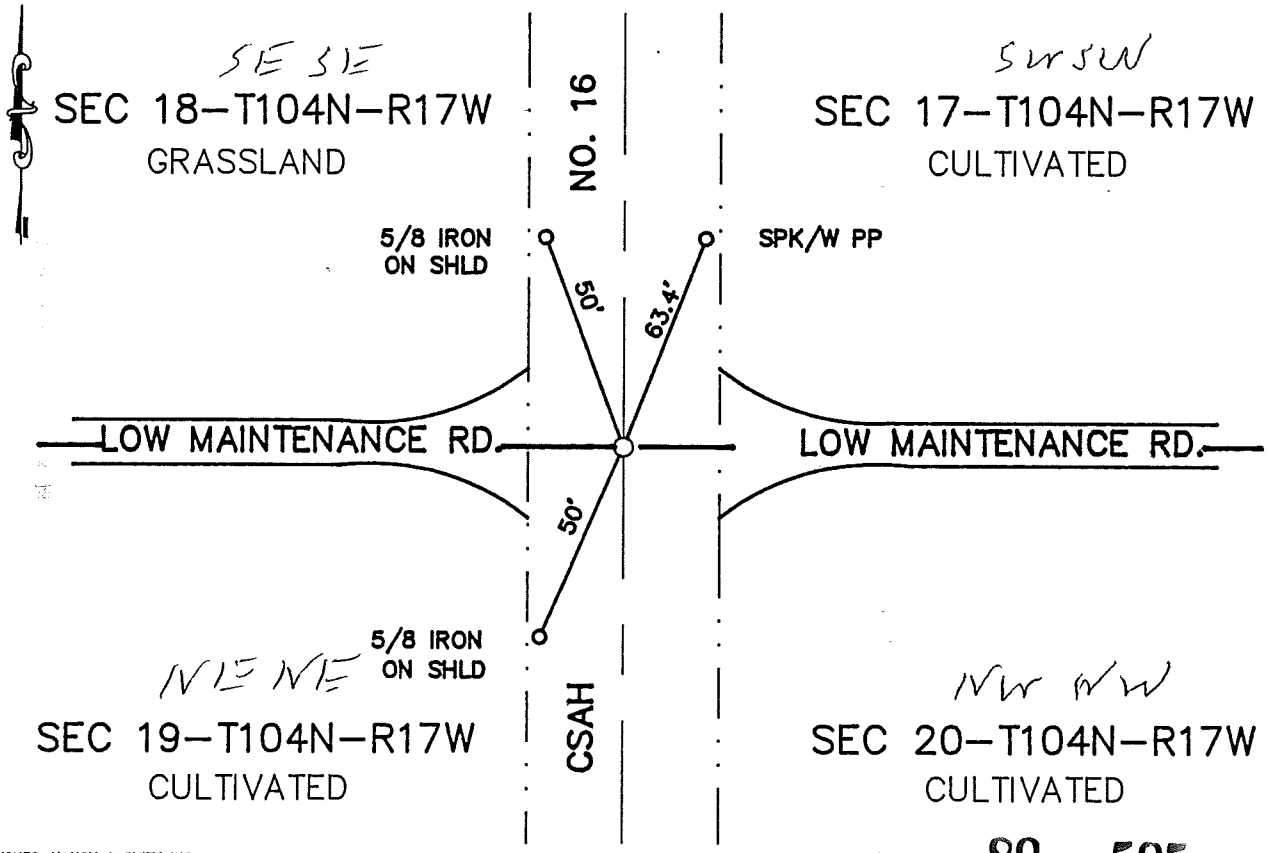

JONES, HAUGH & SMITH INC
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

BOOK 89 PAGE 595

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein were prepared by me or under my direct supervision.

_____ (SIGNATURE) 12-27-95 (DATE)

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☒ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of Mower

I hereby certify that this document was filed in the County Rec. office at 2 p .M. on the 4 day of Jan A.D., 19 96

COUNTY RECORDER Charles Engen

By Susan M. Davis, Deputy

DOCUMENT NO. 441761

M.H.D. FORM NO. 2105

Book 89 Misc Page 595

SE Cor SEC 18-104-17

This corner was originally established by Deputy Surveyor John Fitzpatrick of the U.S. General Land Office in 1853. The government notes show a stone was placed with a mound of earth and trench.

The following were contacted for section corner information.

Mower County Highway Dept.
Mower County Recorder
Zenk Engineering
Tucker Land Surveying

No record of this corner was obtained from the above mentioned offices.

1995 Jones, Haugh and Smith crew, under direction of John Schulte, Mower County Surveyor RLS 13807, dug with county backhoe at the CL of CSAH No.16 and the CL of low maintenance East and West. Found a 6" tile filled with concrete with a 3/4" iron inside the tile 2' below the road surface. Continued digging and found a large rock with a hub on the North side of it. Placed a cast iron monument at the road surface.

The monument fit occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

For electronic survey data and analysis, contact the firm of Jones, Haugh and Smith Inc.

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

N1/4 Corner of Section 18, Township 104N Range 17W, 5TH P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch:

☐ On 10-9-92 (DATE) found a NOTHING

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 6-12-93 (DATE) placed a CAST IRON MONUMENT

SKETCH OF REFERENCE TIES

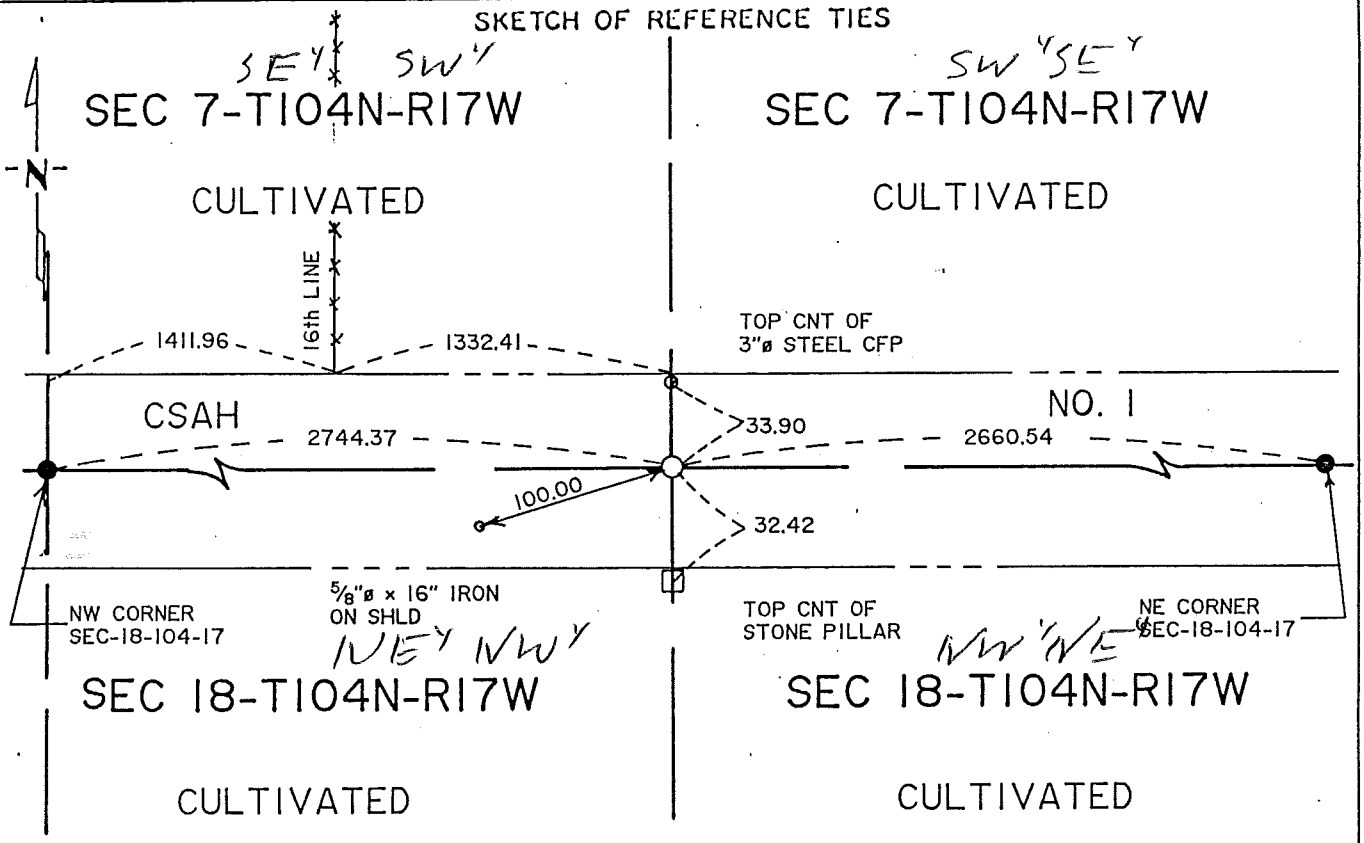

JONES, HAUGH & SMITH INC.
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

SIGNATURE _____ DATE 6-18-93

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☑ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of Mower

I hereby certify that this document was filed in the County Rec. office at 4 P.M. on the 24 day of June A.D., 1993

COUNTY RECORDER Maureen Mertes

By Maureen Mertes, Deputy

DOCUMENT NO. 421720

Bk 80 Misc Pg 119

M.H.D. FORM NO. 2105

BOOK 80 PAGE 119

STATEMENT OF EVIDENCE

N 1/4 cor Sec 18-104-17

This corner was originally established by Deputy Surveyor John Fitzpatrick of the U.S. General Land Office in 1853. The government notes show a wood post was set with a mound of earth and trench.

The following were contacted for section corner information:
Mower County Highway Department
Mower County Recorder
Zenk Engineering
Tucker Land Surveying

The following information was obtained to support evidence of the perpetuation of the original public land survey corner.

1882 Clausen, Mower County Surveyor, notes indicate a government post at this location.

1892 Clausen, Mower County Surveyor, notes indicate a stone inplace at this corner.

1992 Jones, Haugh & Smith Inc crew under the direction of John H. Schulte IV, RLS 13807, dug with the County backhoe a 4'x12'x5' hole. At a depth of four feet we uncovered a large deposit of 3" diameter quarry stone. It appears a core cut was made at this location which would have destroyed all evidence of a perpetuation of this corner of the original public land survey corner.

1993 Jones, Haugh & Smith Inc crew under the direction of John H. Schulte IV, RLS 13807, established this corner on a straight line between the northwest and northeast corner of Section 18 and also in line with the line fences running north and south.

The monument set fits occupation lines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

BOOK 80 PAGE 120

Index No. p 60 ; "A" p132 ; "A"

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

NE Corner of Section 18, Township 104N Range 17W, 5TH P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch:

☐ On 10-9-92 (DATE) found a 8"x15" CONCRETE MONUMENT

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 10-9-92 (DATE) placed a CAST IRON MONUMENT

SKETCH OF REFERENCE TIES

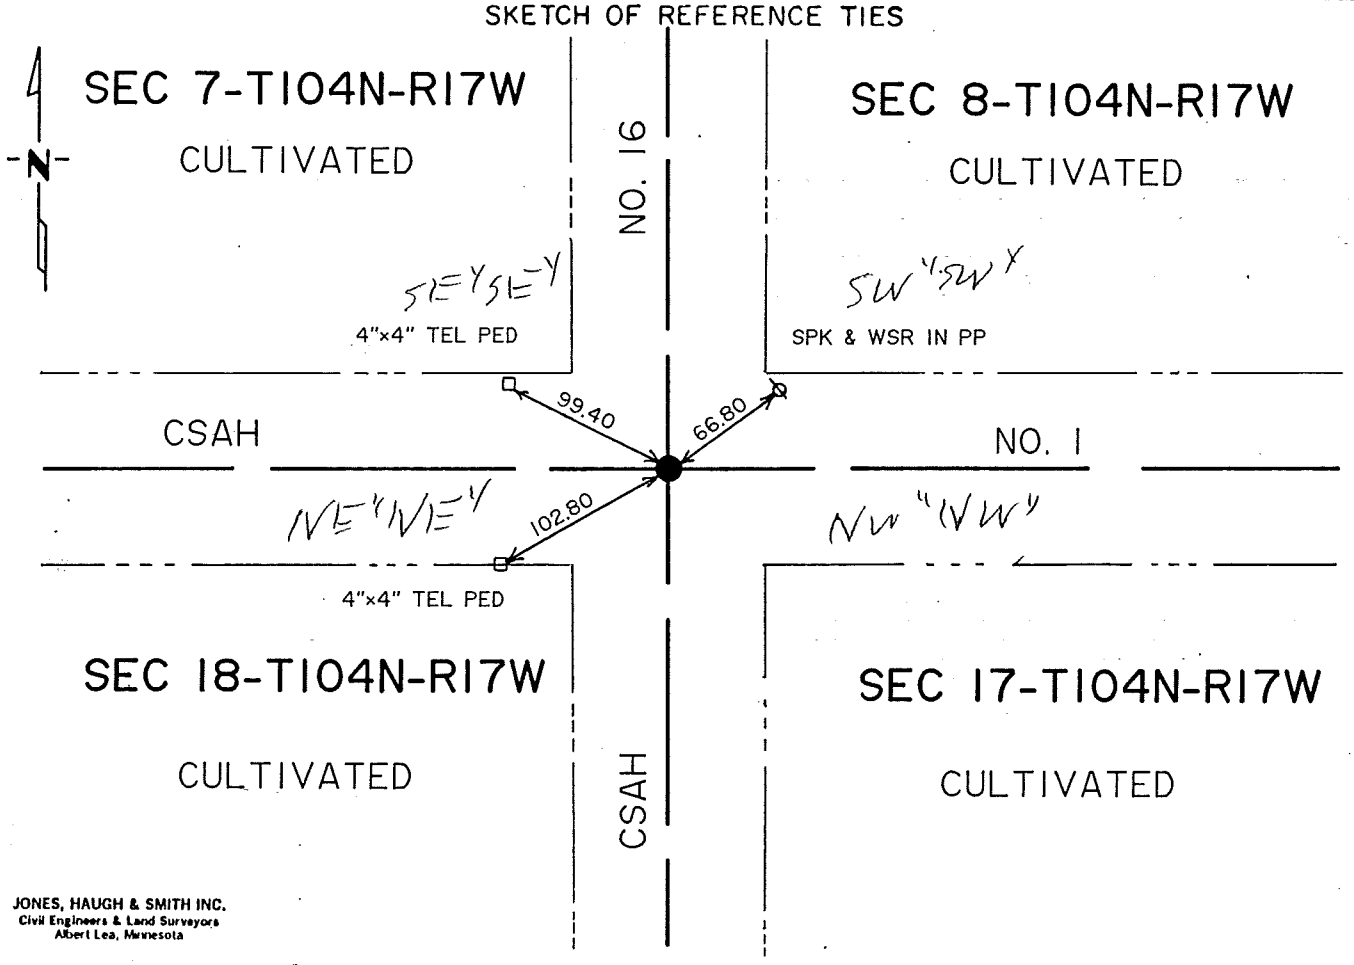

JONES, HAUGH & SMITH INC.
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

SIGNATURE 4-30-93 DATE

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☑ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of Mower

I hereby certify that this document was filed in the County Rec. office at 3 P.M. on the 4 day of May A.D., 19 93

COUNTY RECORDER Charles Evenson

By Marlene Martin, Deputy

DOCUMENT NO. 420488

Bk 79 Misc Pg 342

M.H.D. FORM NO. 2105

BOOK 79 PAGE 342

STATEMENT OF EVIDENCE

NE corner Sec. 18-104-17

This corner was originally established by Deputy Surveyor John Fitzpatrick of the U.S. General Land Survey Office in 1854. The government notes show corner was marked with a wood post and charred stake and a trench with a mound of earth.

The following were contacted for section corner information:
Mower County Engineering Department
Mower County Recorder
Tucker Land Surveying
Minnesota Department of Transportation

The following information was obtained to support evidence of a perpetuation of the original public land survey corner.

1931 County Grading Plan shows a concrete monument inplace and the following ties were recorded in Book 'A' in the office of the Mower County Engineer:

NE to power pole	42.9'
NE to cor fence post	35.2'
NW to cor fence post	38.9'
SW to tele pole	43.2'
SW to W end culvert	27.6'
SE to E end culvert	27.4'

1956 Recorded in Book 'A' show Highway Department uncovered a concrete monument and the following ties were taken:

NE to power pole	42.9'
NW to fence post	60.8'
SE to power pole	90.7'
SW to tele pole	58.5'

1992 Jones, Haugh & Smith crew under the direction of John H. Schulte IV, dug with the county backhoe on centerline centerline of County Roads north, south, east and west and uncovered a 8" diameter x 15" long concrete monument over two lengths of 4"x16" long concrete monument in clay tiles extending 3.5 feet into virgin soil. Set cast iron monument over the 4" diameter concrete monument on road surface.

The monument found fits occupation and road centerlines within the section, agrees with past records and is accepted as best evidence of the original public land survey corner.

For electronic survey data and analysis contact the firm of Jones, Haugh & Smith Inc.

BOOK 79 PAGE 343

Jones, Haugh

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

SE Corner of Section 19, Township 104N Range 17W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch

☐ On 05/29/1996 (DATE) found a –

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 05/29/1996 (DATE) placed a CAST IRON MONUMENT

SKETCH OF REFERENCE TIES

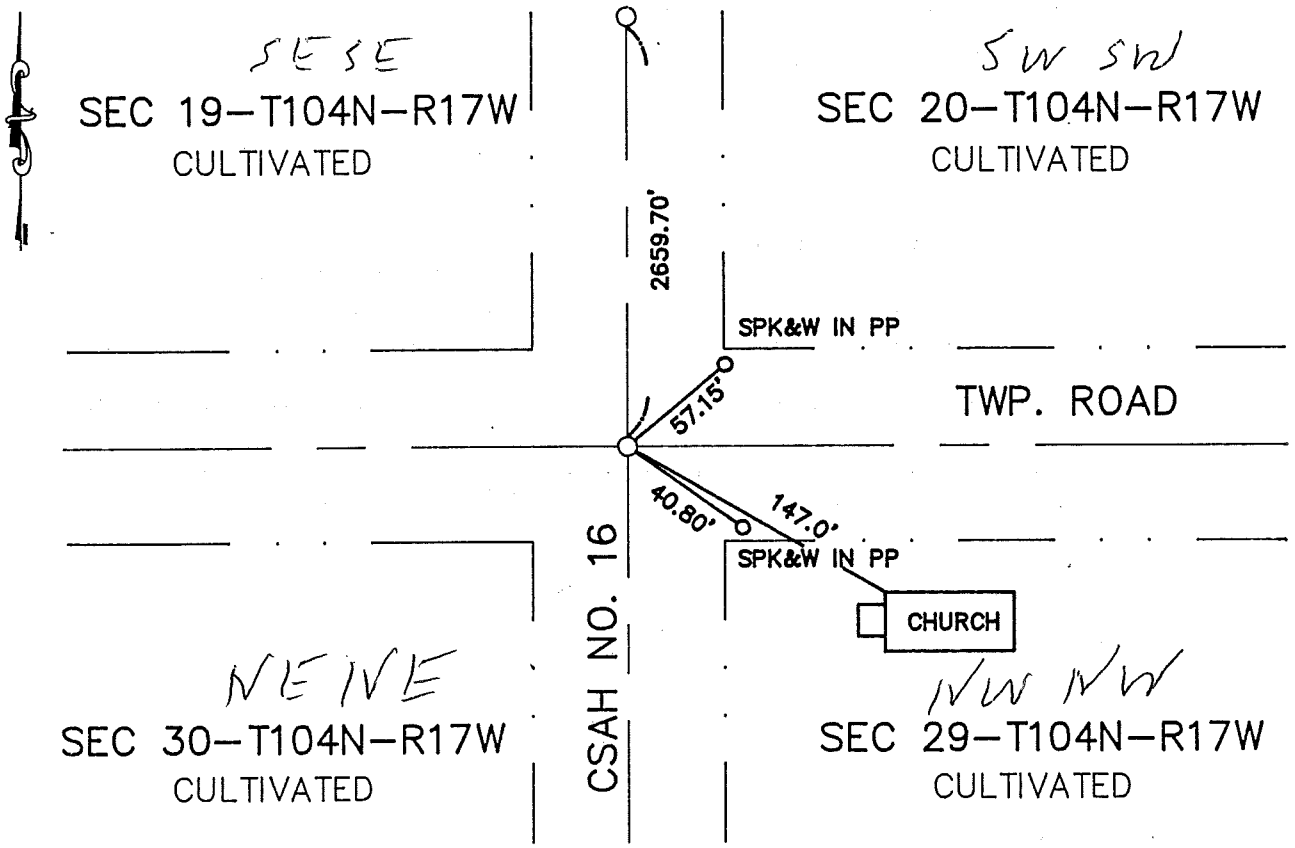

JONES, HAUGH & SMITH INC
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

BOOK 96 PAGE 303

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein were prepared by me or under my direct supervision.

SIGNATURE _____ DATE 9-9-97

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☒ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of Mower

I hereby certify that this document was filed in the County Rec. office at 2 P .M. on the 10 day of Sept A.D., 1997

COUNTY RECORDER Charles Enger

By Susan M. Davis, Deputy

DOCUMENT NO. 456906

M.H.D. FORM NO. 2105

Book 96 Misc Page 303

SE Cor SEC 19-104-17

This corner was originally established by Deputy Surveyor John Fitzpatrick of the U.S. General Land Office in 1853. The government notes show a wood post was set with mound of earth and trench.

The following were contacted for section corner information.

Mower County Highway Dept.
Mower County Recorder
Tucker Land Surveying

Mower County records state an inplace large round top granite rock- hub to north. Tied to NW corner of foundation of church property, 147.0' SE.

1996 Jones Haugh and Smith crew, under direction of John Schulte, Mower County Surveyor RLS 13807, dug a 3' x 6' hole 5.0' deep to virgin soil. Found no evidence of large round top granite rock. Set corner on staight line using E 1/4 corner and NE corner. Intersected corner tie from NW corner of church 147.0'. Set 5/8" x 16" iron with cast iron monument at road surface.

The monument fits occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

For electronic survey data and analysis, contact the firm of Jones, Haugh and Smith Inc.

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

W 1/4 Corner of Section 19, Township 104N Range 17W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch

☐ On 09/20/1996 (DATE) found a 1'X2' ROCK

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 09/20/1996 (DATE) placed a CAST IRON MONUMENT

SKETCH OF REFERENCE TIES

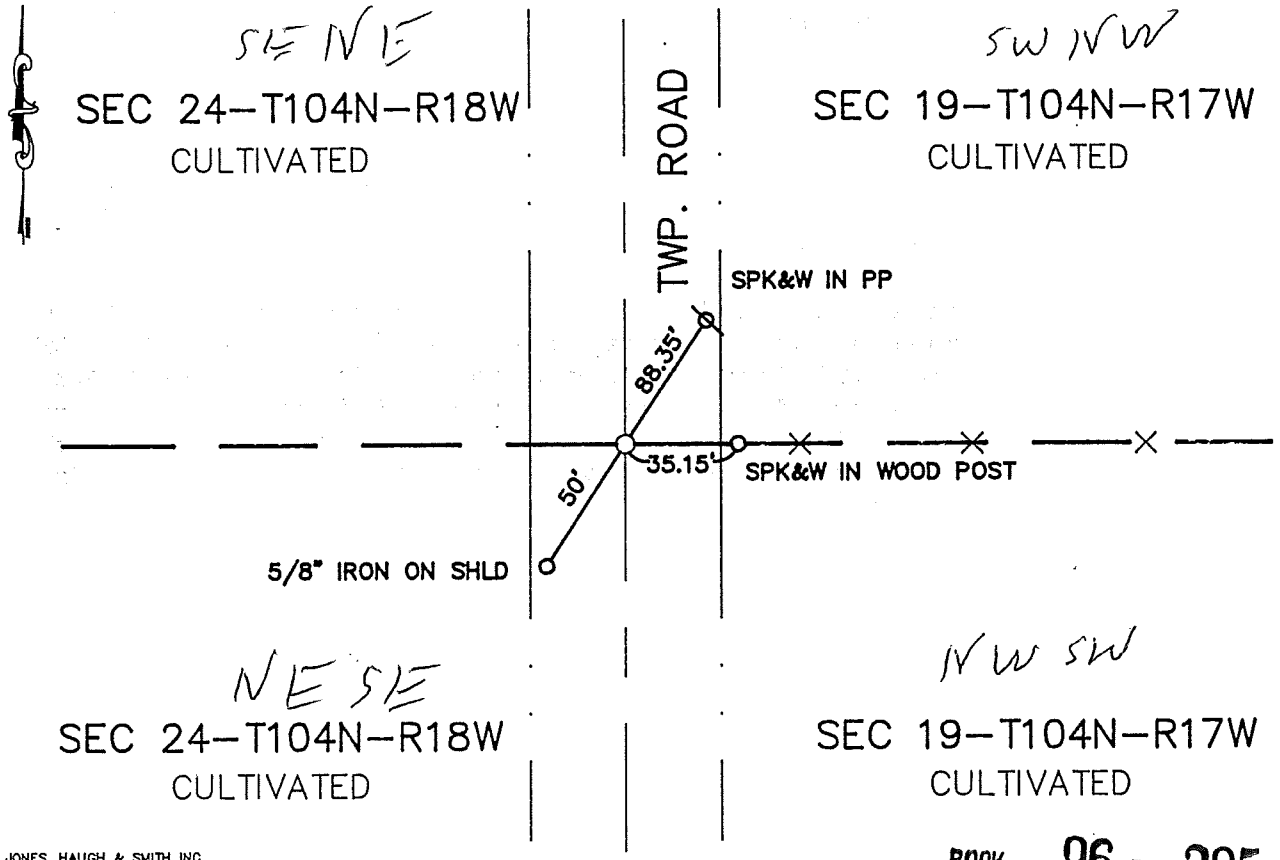

JONES, HAUGH & SMITH INC
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

BOOK 96 PAGE 305

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein were prepared by me or under my direct supervision.

SIGNATURE _____ DATE 9-9-97

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☒ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of Mower

I hereby certify that this document was filed in the County Rec. office at 2 P .M. on the 10 day of Sept A.D., 1997

COUNTY RECORDER Charles Engen

By Susan M. Davis, Deputy

DOCUMENT NO. 456097

M.H.D. FORM NO. 2105

Book 96 Misc Page 305

W 1/4 Cor SEC 19-104-17

This corner was originally established by Deputy Surveyor John Taylor of the U.S. General Land Office in 1853. The government notes show a wood post was set with mound of earth and trench.

The following were contacted for section corner information.

Mower County Highway Dept.
Mower County Recorder
Tucker Land Surveying

No record of this corner was obtained from the above mentioned offices.

1995 Jones Haugh and Smith crew, under direction of John Schulte, Mower County Surveyor RLS 13807, dug with Mower county backhoe on centerline of road and in line with line fence east. Dug a 3' x 8' hole and uncovered a 1' x 2' pointed rock 2.5' below road surface. The rock fit centerline of road and 2' south of line fence east, left rock as found and set a 5/8" x 16" iron with cast iron monument over rock 0.4' below road surface.

The monument fits occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

For electronic survey data and analysis, contact the firm of Jones, Haugh and Smith Inc.

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

E 1/4 Corner of Section 19, Township 104N Range 17W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch

☐ On 05/29/1996 (DATE) found a –

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 05/29/1996 (DATE) placed a CAST IRON MONUMENT

SKETCH OF REFERENCE TIES

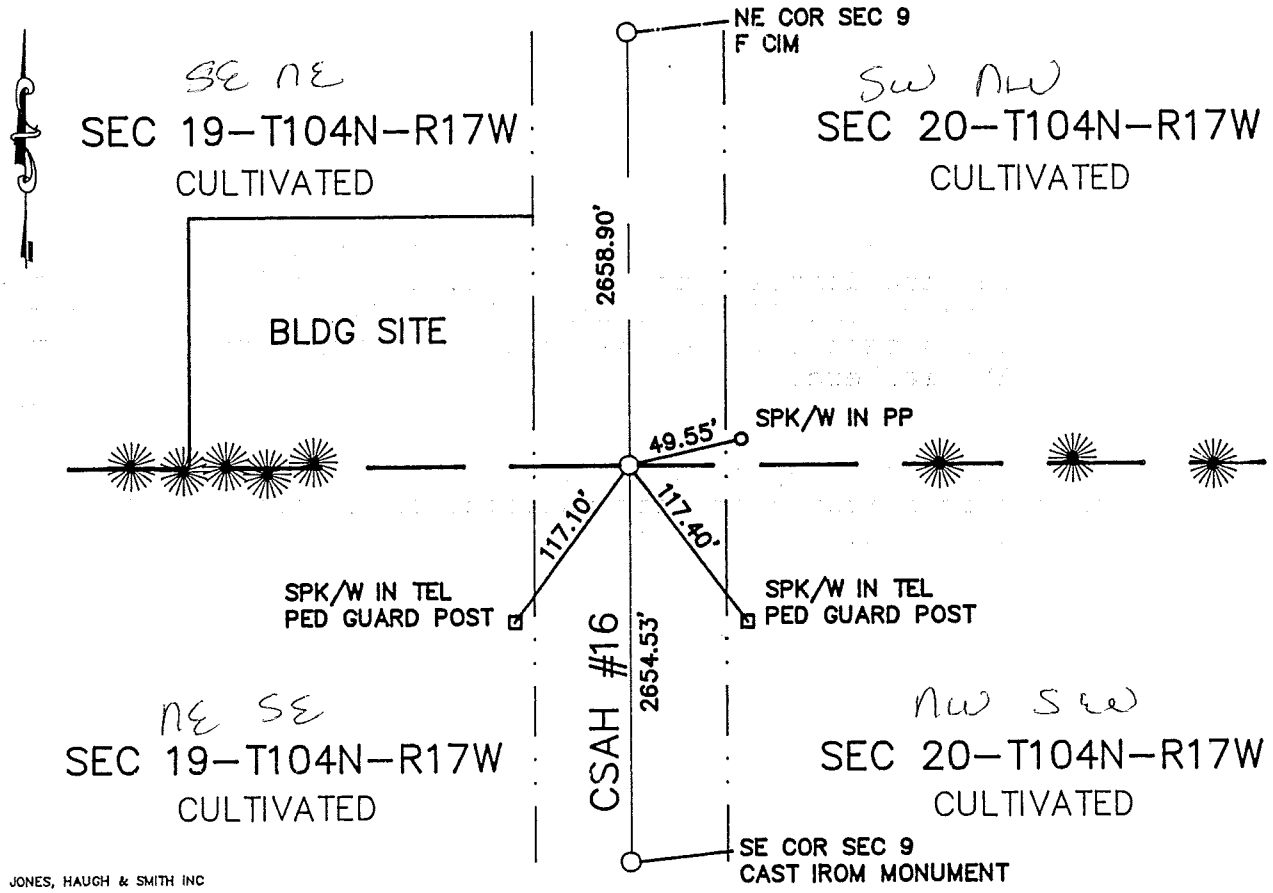

JONES, HAUGH & SMITH INC
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

Statement of evidence relative to this corner location is on back of page. BOOK 92 PAGE 222

I hereby certify that this document and the data contained herein were prepared by me or under my direct supervision.

SIGNATURE _____ DATE 8-16-96

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☒ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of Mower

I hereby certify that this document was filed in the County Rec. office at 3 P.M. on the 19 day of August A.D., 1996

COUNTY RECORDER Charles Engen

By Susan M. Davis, Deputy

DOCUMENT NO. A97270

M.H.D. FORM NO. 2105

Book 92 Misc Page 222

E 1/4 Cor SEC 19-104-17

This corner was originally established by Deputy Surveyor John Fitzpatrick of the U.S. General Land Office in 1853. The government notes show a wood post was set with mound of earth and trench.

The following were contacted for section corner information.

Mower County Highway Dept.
Mower County Recorder
Zenk Engineering
Tucker Land Surveying

No record of this corner was obtained from the above mentioned offices.

1996 Jones Haugh and Smith crew, under direction of John Schulte, Mower County Surveyor RLS 13807, searched area using a metal locator and found no evidence of a monument. County highway notes show that no monument was found when the highway was constructed. The corner was using county distances set at CL of the highway and in line with a fenceline west.

The monument fits occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

For electronic survey data and analysis, contact the firm of Jones, Haugh and Smith Inc.

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

E 1/4 Corner of Section 20, Township 104N Range 17W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch

☐ On 05/14/1998 (DATE) found a FIELD STONE, 1'X18" POINTED STONE

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 05/14/1998 (DATE) placed a 5/8" IRON CAPPED 13807, CAST IRON MONUMENT

SKETCH OF REFERENCE TIES

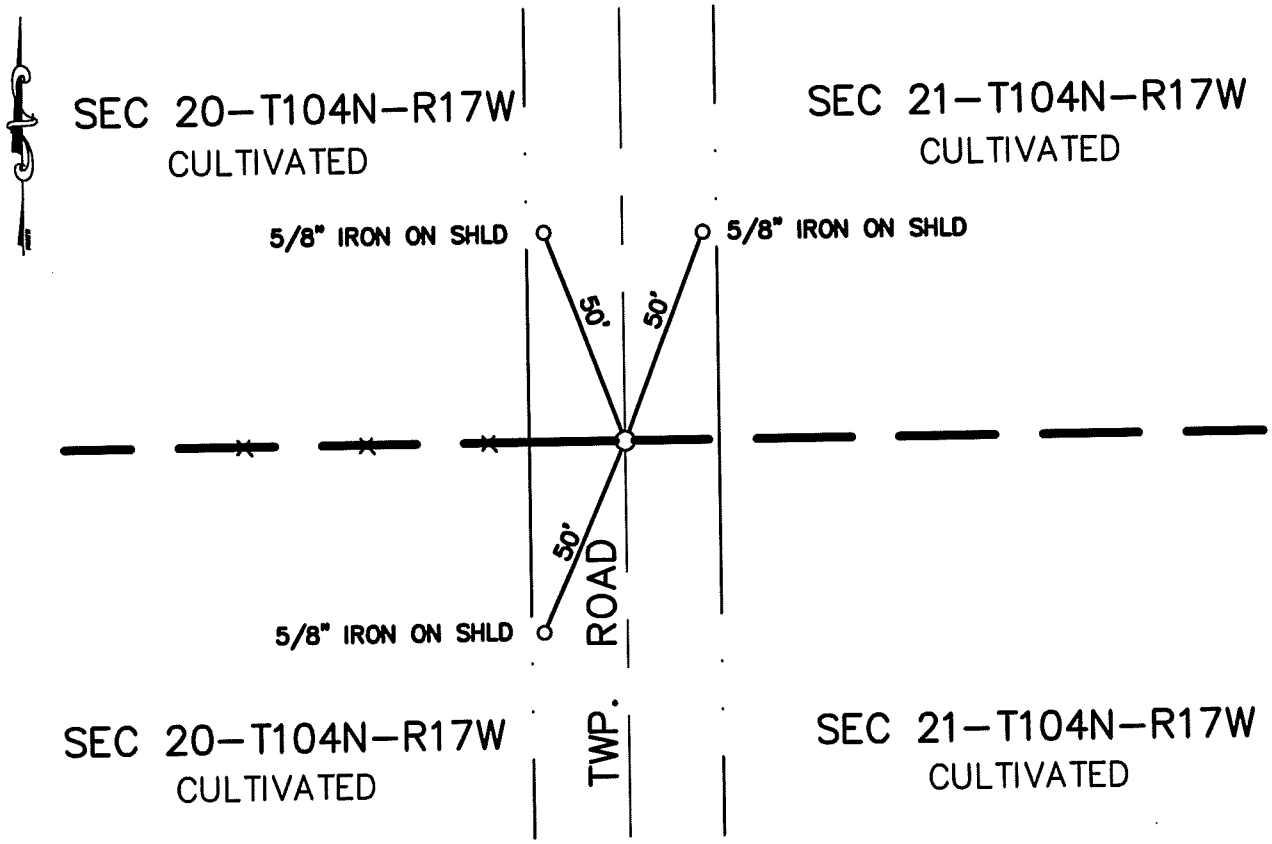

JONES, HAUGH & SMITH INC
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein were prepared by me or under my direct supervision.

SIGNATURE _____ DATE 5-21-98

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☒ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER

County of _____

I hereby certify that this document was filed in the County Rec. office at _____ .M. on the _____ day of _____ A.D., 19___

COUNTY RECORDER _____

By _____, Deputy

DOCUMENT NO. _____

M.H.D. FORM NO. 2105

E 1/4 Cor Sec 20-104-17

This corner was originally established by Deputy Surveyor John Fitzpatrick of the U.S. General Land Office in 1853. The government notes show a wood post was set with mound of earth and trench.

The following were contacted for section corner information.

Mower County Highway Dept.
Mower County Recorder
Tucker Land Surveying

No record of this corner was obtained from the above mentioned offices.

1998 Jones Haugh and Smith crew, under direction of John Schulte, Mower County Surveyor RLS 13807, dug with the Mower County backhoe at the centerline of township road N-S and in line with line fence west. Located a field stone with a 12"x18" pointer rock on the west side 2.5' below road surface. Stone and rock fit road centerline and occupation lines. Placed a 5/8" iron capped 13807 on the south side of stone and rock found. Placed a cast iron monument over monuments found.

The monument fits occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

For electronic survey data and analysis, contact the firm of Jones, Haugh and Smith Inc.

Recorded at Register of Deeds 4-21-77 Index No. TIE BOOK P. 60

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

NORTHEAST Corner of Section 21, Township 104N, Range 17W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch:

☒ On 7-7-72 (DATE) found a 8 INCH BY 8 INCH CONCRETE MONUMENT, DOWN 0.3 FEET.

☒ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☒ On 4-25-75 (DATE) placed a MHD 9 INCH CAST IRON MONUMENT ABOVE CONCRETE MONUMENT (1/2 INCHES DOWN)

SKETCH OF REFERENCE TIES

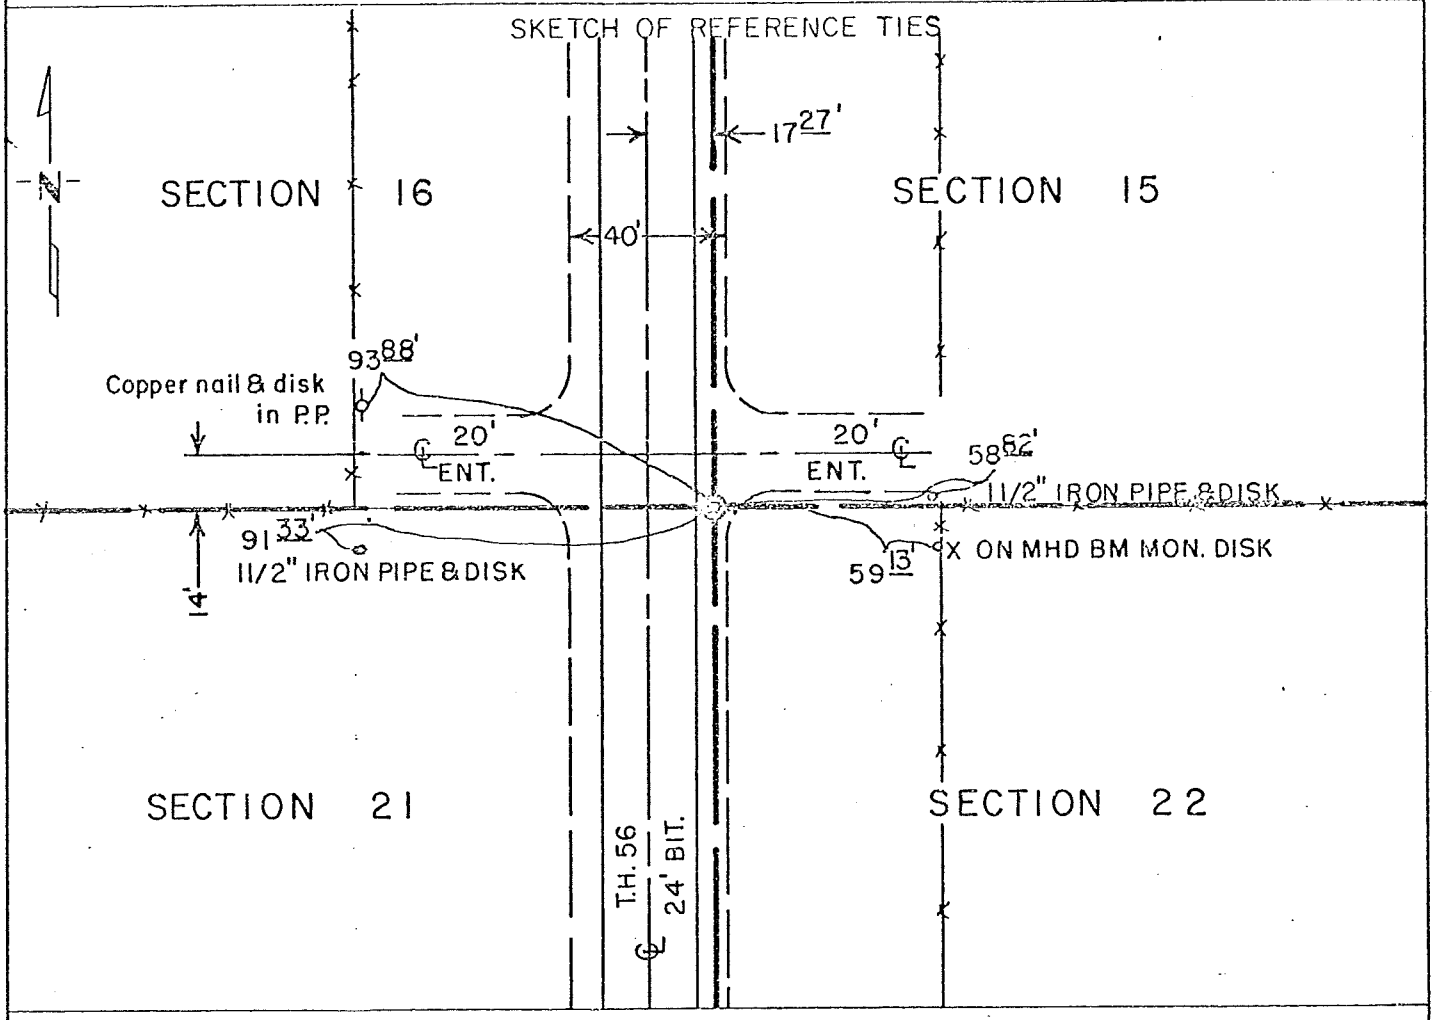

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

Donald R. Bolding 9/8/75
SIGNATURE DATE

Registration No. 10162

☒ Land Surveyor, ☐ Professional Engineer

☐ County Surveyor, ☐ County Engineer

OFFICE OF THE REGISTER OF DEEDS
County of _____

I hereby certify that this document was filed in the Reg. of Deeds office at _____ .M. on the _____ day of _____ A.D., 19__

Register of Deeds _____

By _____, Deputy

DOCUMENT NO. _____

M.H.D. FORM NO. 2105

Statement of Evidence:

NORTHEAST CORNER OF SECTION 21, TOWNSHIP 104N, RANGE 17W, 5th P.M.

November 1853 — John Fitzpatrick, Deputy Surveyor, set post, deposited stone, made a mound of earth and sod with trench and pits during the Original Public Land Survey.

July 1929 — C. Aasland, M.H.D. Engineer, found a stone 17.4 feet east of P.I. 1261+31.1 replaced with a 8 inch by 8 inch by 18 inch concrete marker May 5, 1930.

1941 — O. J. Gerner, M.H.D. Engineer, found a 8 inch by 8 inch Concrete Monument 17.4 feet east of PI 1261+31, 3 inches below surface.

1955 — E. L. Pehrson, M.H.D. Engineer, found a 8 inch by 8 inch by 18 inch concrete monument at the corner 17.25 feet east of PI 1261+31.1, 0.3 feet below surface.

July 1972 — A. L. Sotebeer, M.H.D. Engineer found a 8 inch by 8 inch by 18 inch concrete monument, 17.27 feet east of PI 1261+31.1.

April 1975 — M.H.D. placed a cast iron monument above the 8 inch by 8 inch concrete monument 1/2 inch below surface for the corner.

An analysis of the record data indicates the concrete monument was set in 1930 to replace the stone found in 1929. The concrete monument is accepted as a perpetuation of the Public Land Survey corner.

For details of the Survey contact the District Surveying and Mapping Section of the Minnesota Highway Department, Rochester.

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

SW Corner of Section 25, Township 104N, Range 17W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch:

☐ On 7-19-91 (DATE) found a 1/2"Ø iron over a 3/4"Ø iron cast in a 8"Ø concrete monument.

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 7-19-91 (DATE) placed a cast iron monument over monuments found.

SKETCH OF REFERENCE TIES

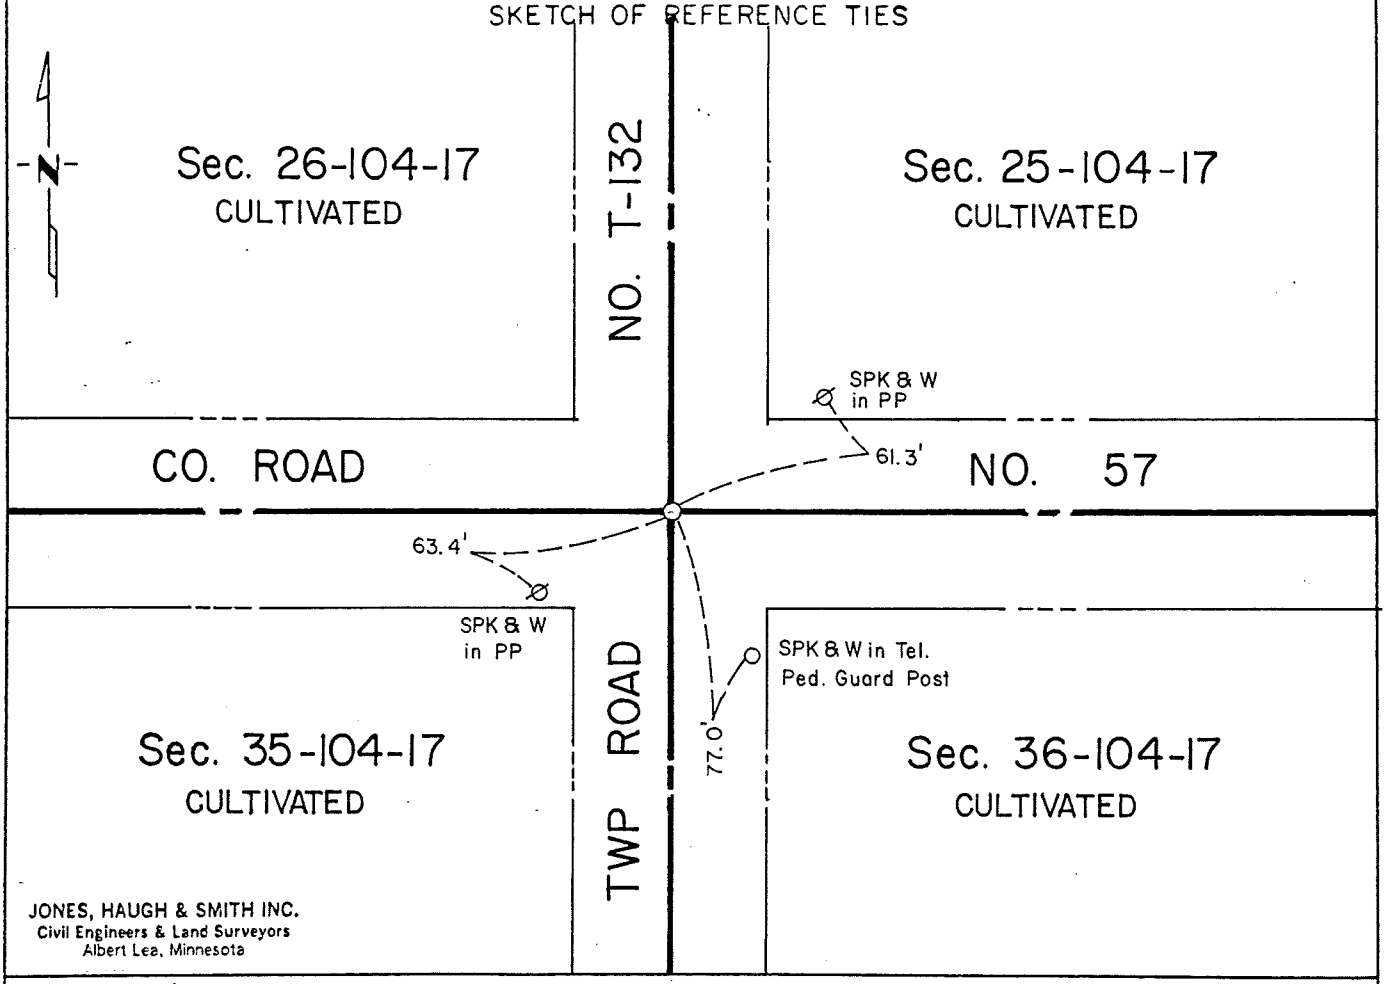

JONES, HAUGH & SMITH INC.
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

_____ (SIGNATURE) 8-12-91 (DATE)

Registration No. 13807

☑ Land Surveyor, ☐ Professional Engineer

☐ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of _____

I hereby certify that this document was filed in the County Rec. office at _____ .M. on the _____ day of _____ A.D., 19__

COUNTY RECORDER _____

By _____, Deputy

DOCUMENT NO. _____

M.H.D. FORM NO. 2105

STATEMENT OF EVIDENCE

SW corner Sec 25-104-17

This corner was originally established by Deputy Surveyor John Fitzpatrick of the U.S. General Land Office in 1853. The government notes show a wood post and a stone was set with a mound of earth and trench.

The following were contacted for section corner information:
Mower County Highway Dept
Mower County Recorder
Zenk Engineering
Tucker Land Surveying

The following information was obtained to support evidence of a perpetuation of the original public land survey corner.

1891 Clausen, Mower County Surveyor from 1880-1892 notes show a stone in place.

1991 Jones, Haugh & Smith Inc crew under the direction of John H. Schulte IV, RLS 13807, dug with the County backhoe on centerline centerline of north-south-east-west roads for 1992 County Road No. 57 Grading Project and uncovered a 1/2" diameter iron capped RLS 15471 over a 3/4" diameter iron cast in a 8" diameter concrete monument 2 feet deep in virgin soil. Set a cast iron monument over monument found.

The monument fit occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

S1/4 Corner of Section 25, Township 104N, Range 17W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch:

☐ On 7-19-91 (DATE) found a 1/2"Ø iron over a 3/4"Ø iron cast in 8"Ø concrete monument.

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 7-19-91 (DATE) placed a cast iron monument over concrete monument found.

SKETCH OF REFERENCE TIES

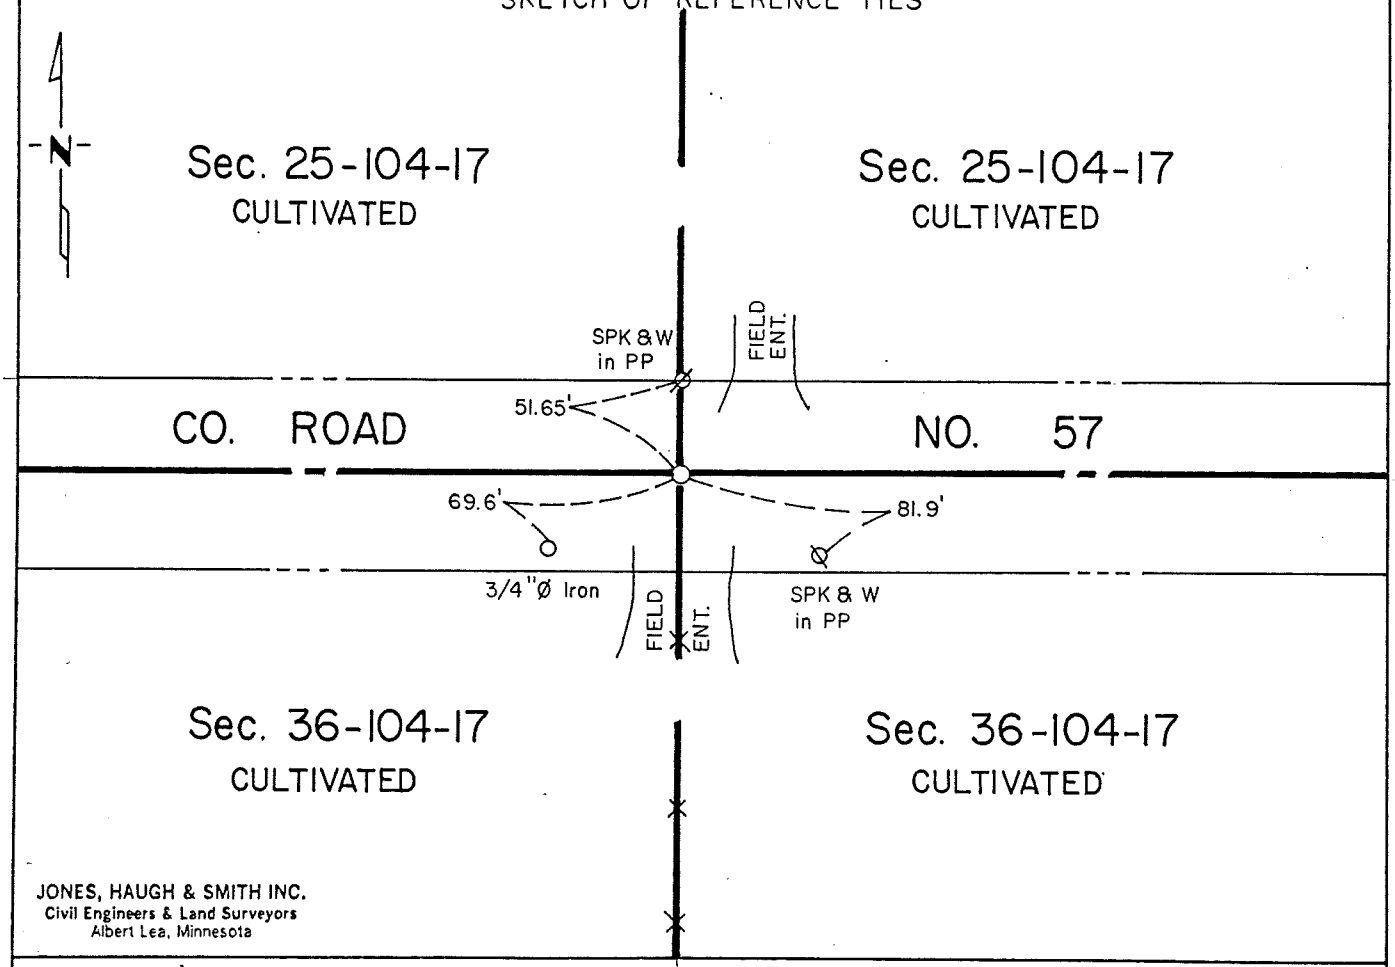

JONES, HAUGH & SMITH INC.
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

_____ (SIGNATURE) 8-12-91 (DATE)

Registration No. 13807

☑ Land Surveyor, ☐ Professional Engineer

☐ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of _____

I hereby certify that this document was filed in the County Rec. office at _____ .M. on the _____ day of _____ A.D., 19__

COUNTY RECORDER _____

By _____, Deputy

DOCUMENT NO. _____

M.H.D. FORM NO. 2105

STATEMENT OF EVIDENCE

S 1/4 corner Sec 25-104-17

This corner was originally established by Deputy Surveyor John Fitzpatrick of the U.S. General Land Office in 1853. The government notes show a wood post and a stone was set with a mound of earth and trench.

The following were contacted for section corner information:
Mower County Highway Dept
Mower County Recorder
Zenk Engineering
Tucker Land Surveying

1891 Clausen, Mower County Surveyor from 1880-1892 notes gives chaining distance but does not say what was found.

1991 Jones, Haugh & Smith Inc crew under the direction of John H. Schulte IV, RLS 13807, dug with the County backhoe on centerline of east-west road in line with fence south for 1992 County Road No. 57 Grading Project. Excavation uncovered a 1/2" diameter iron over a capped RLS 15471 3/4" diameter iron cast in a 8" diameter concrete monument 2.5 feet below surface. Set a cast iron monument over concrete monument found.

The monument fit occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

SW Corner of Section 26, Township 104N, Range 17W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch:

☐ On 7-19-91 (DATE) found a 3/4"Ø x 28" long iron over a 3/4"Ø iron cast in a concrete (6"Ø) monument.

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 7-19-91 (DATE) placed a cast iron monument over monuments found.

SKETCH OF REFERENCE TIES

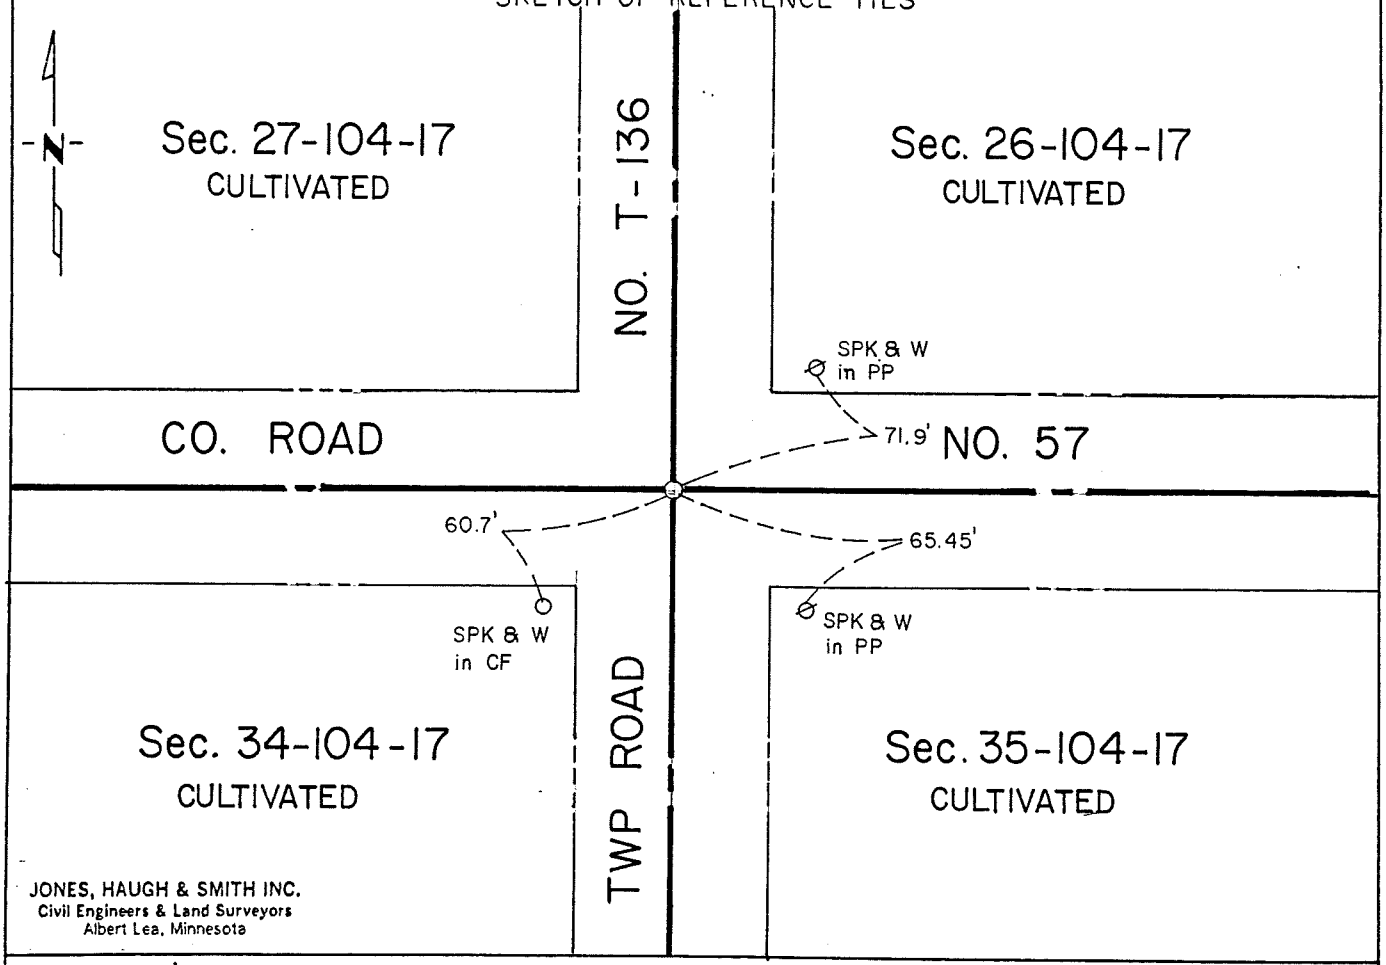

JONES, HAUGH & SMITH INC.
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

SIGNATURE _____ DATE 8-12-91

Registration No. 13807

☑ Land Surveyor, ☐ Professional Engineer

☐ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of _____

I hereby certify that this document was filed in the County Rec. office at _____ .M. on the _____ day of _____ A.D., 19__

COUNTY RECORDER _____

By _____, Deputy

DOCUMENT NO. _____

M.H.D. FORM NO. 2105

STATEMENT OF EVIDENCE

SW corner Sec 26-104-17

This corner was originally established by Deputy Surveyor John Fitzpatrick of the U.S. General Land Office in 1853. The government notes show a wood post and a stone was set with a mound of earth and trench.

The following were contacted for section corner information:
Mower County Highway Dept
Mower County Recorder
Zenk Engineering
Tucker Land Surveying

The following information was obtained to support evidence of a perpetuation of the original public land survey corner.

1884 Clausen, Mower County Surveyor from 1880-1892 notes show a government post in place.

1991 Jones, Haugh & Smith Inc crew under the direction of John H. Schulte IV, RLS 13807, dug with the County backhoe on centerline centerline of north-south-east-west roads for 1992 County Road No. 57 Grading Project and uncovered a 3/4" diameter x 28" iron over a 3/4" diameter iron cast in a 6" diameter concrete monument 3 feet below surface. Set a cast iron monument over monument found.

The monument fit occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

S1/4 Corner of Section 26, Township 104N, Range 17W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch:

☐ On 7-19-91 (DATE) found a NO EVIDENCE OF PLS CORNER.

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 7-19-91 (DATE) placed a CAST IRON MONUMENT

SKETCH OF REFERENCE TIES

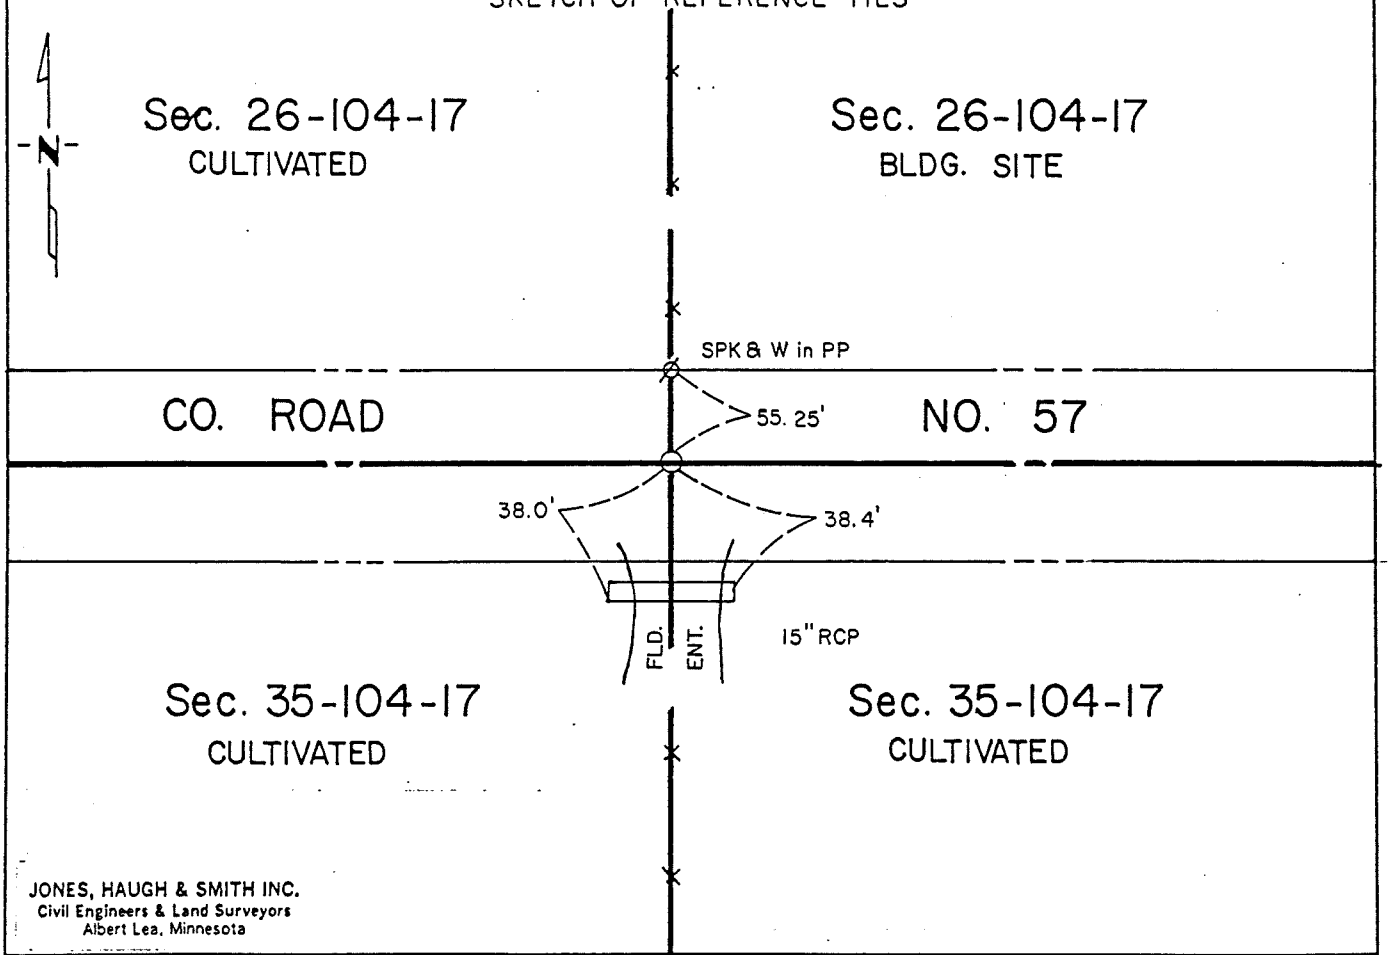

JONES, HAUGH & SMITH INC.
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

SIGNATURE _____ DATE 8-12-91

Registration No. 13807

☑ Land Surveyor, ☐ Professional Engineer

☐ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of _____

I hereby certify that this document was filed in the County Rec. office at _____ .M. on the _____ day of _____ A.D., 19__

COUNTY RECORDER _____

By _____, Deputy

DOCUMENT NO. _____

M.H.D. FORM NO. 2105

STATEMENT OF EVIDENCE

S 1/4 corner Sec 26-104-17

This corner was originally established by Deputy Surveyor John Fitzpatrick of the U.S. General Land Office in 1853. The government notes show a wood post and a stone was set with a mound of earth and trench.

The following were contacted for section corner information:
Mower County Highway Dept
Mower County Recorder
Zenk Engineering
Tucker Land Surveying

No information was obtained to support evidence of a perpetuation of the original public land survey corner.

1991 Jones, Haugh & Smith Inc crew under the direction of John H. Schulte IV, RLS 13807, dug with the County backhoe on centerline of east-west road in line with fence north for 1992 County Road No. 57 Grading Project and found no evidence of the public land survey corner. There is a deflection in the County Road at this point. Therefore set a cast iron monument on centerline of east-west road in line with fences north and south.

The monument fit occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

S1/4 Corner of Section 27, Township 104N, Range 17W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch:

☐ On 7-19-91 (DATE) found a 5/8"Ø IRON OVER A 3/4"Ø IRON CAST IN A 6"Ø CONCRETE MONUMENT.

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 7-19-91 (DATE) placed a CAST IRON MONUMENT

SKETCH OF REFERENCE TIES

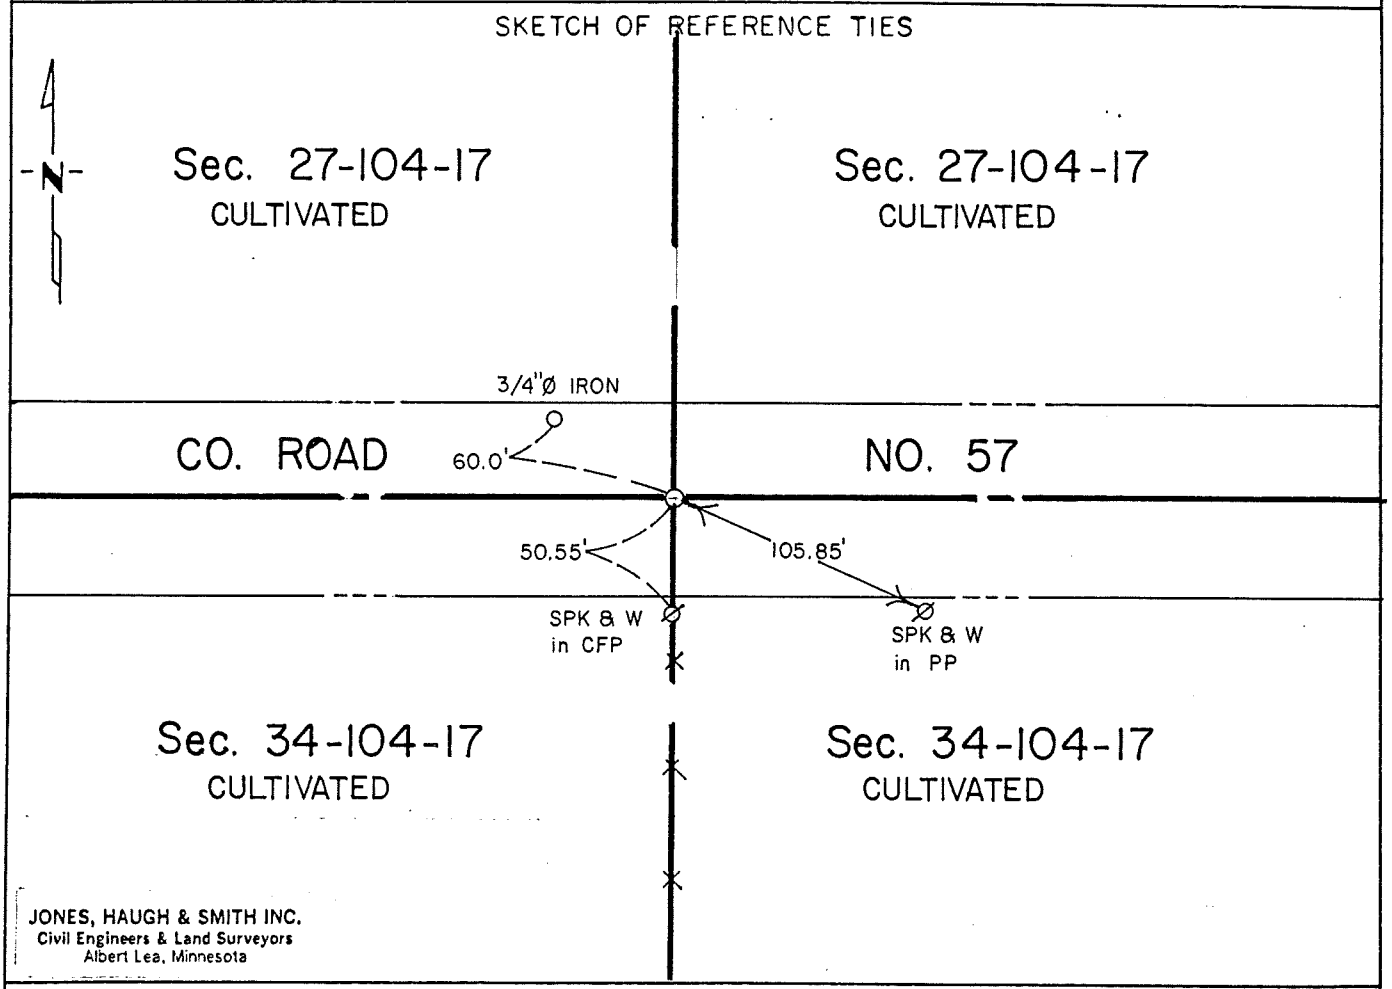

JONES, HAUGH & SMITH INC.
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

SIGNATURE _____ DATE 8-12-91

Registration No. 13807

☑ Land Surveyor, ☐ Professional Engineer

☐ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of _____

I hereby certify that this document was filed in the County Rec. office at _____ .M. on the ____ day of _____ A.D., 19__

COUNTY RECORDER _____

By _____, Deputy

DOCUMENT NO. _____

M.H.D. FORM NO. 2105

STATEMENT OF EVIDENCE

S 1/4 corner Sec 27-104-17

This corner was originally established by Deputy Surveyor John Fitzpatrick of the U.S. General Land Office in 1853. The government notes show a wood post and a stone was set with a mound of earth and trench.

The following were contacted for section corner information:
Mower County Highway Dept
Mower County Recorder
Zenk Engineering
Tucker Land Surveying

The following information was obtained to support evidence of a perpetuation of the original public land survey corner.

1884 Clausen, Mower County Surveyor from 1880-1892 notes show a government post in place.

1987 Jones, Haugh & Smith Inc crew uncovered a 8" diameter concrete monument with a 3/4" diameter iron cast in center 2.0 feet below road surface. Placed a 5/8" diameter iron capped RLS 13807 over monument found.

1991 Jones, Haugh & Smith Inc crew under the direction of John H. Schulte IV, RLS 13807, dug with the County backhoe on centerline east-west road in line with fence south for 1992 County Road No. 57 Grading Project. Excavation uncovered a 3/4" diameter iron cast in a 8" diameter concrete monument. Set a cast iron monument over monument found.

The monument fit occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

S 1/4 Corner of Section 28, Township 104N Range 17W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch

☐ On _____ (DATE) found a _____

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 10/10/2002 (DATE) placed a 5/8" X 16" IRON W/CIM

SKETCH OF REFERENCE TIES

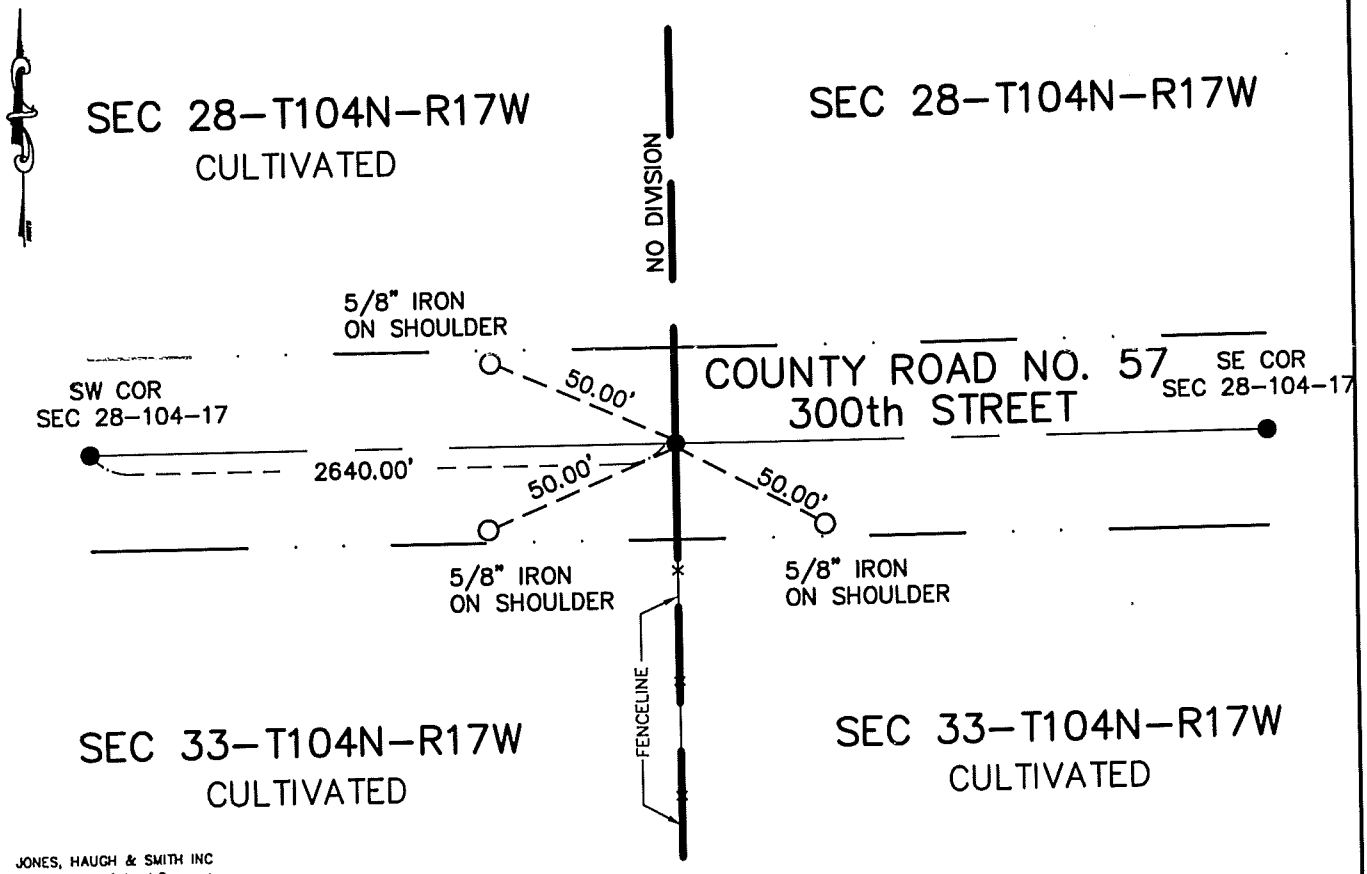

JONES, HAUGH & SMITH INC
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein were prepared by me or under my direct supervision.

_____ (SIGNATURE) 11-1-02 (DATE)

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☒ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER

County of _____

I hereby certify that this document was filed in the County Rec. office at _____ .M. on the _____ day of _____ A.D., 20___

COUNTY RECORDER _____

By _____, Deputy

DOCUMENT NO. _____

S1/4 Cor Sec 28-104-17

Deputy Surveyor John Fitzpatrick of the U.S. General Land Office originally established this corner in 1853. The government notes show a wood post was set with mound of earth and trench.

The following were contacted for section corner information.

Mower County Highway Dept.
Mower County Recorder
Tucker Land Surveying

2002 Jones Haugh and Smith crew, under direction of John Schulte, Mower County Surveyor RLS 13807, dug at location of corner as determined from data on Mower County road No. 57 road plan at a distance of 2640.00 feet east of the southwest corner of said Section 28 and found no evidence of corner. County road plan shows a core cut at this location. Set 5/8" with cast iron head on a straight line between section corners in line with existing fenceline to south. This location fits centerline of existing road and County distance of 2640.00 feet east of NW Section corner.

The monument fits occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

For electronic survey data and analysis, contact the firm of Jones, Haugh and Smith Inc.

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

W 1/4 Corner of Section 28, Township 104N Range 17W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch

☐ On – (DATE) found a –

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 07/13/04 (DATE) placed a 5/8"X16" REBAR WITH CAST IRON MONUMENT

SKETCH OF REFERENCE TIES

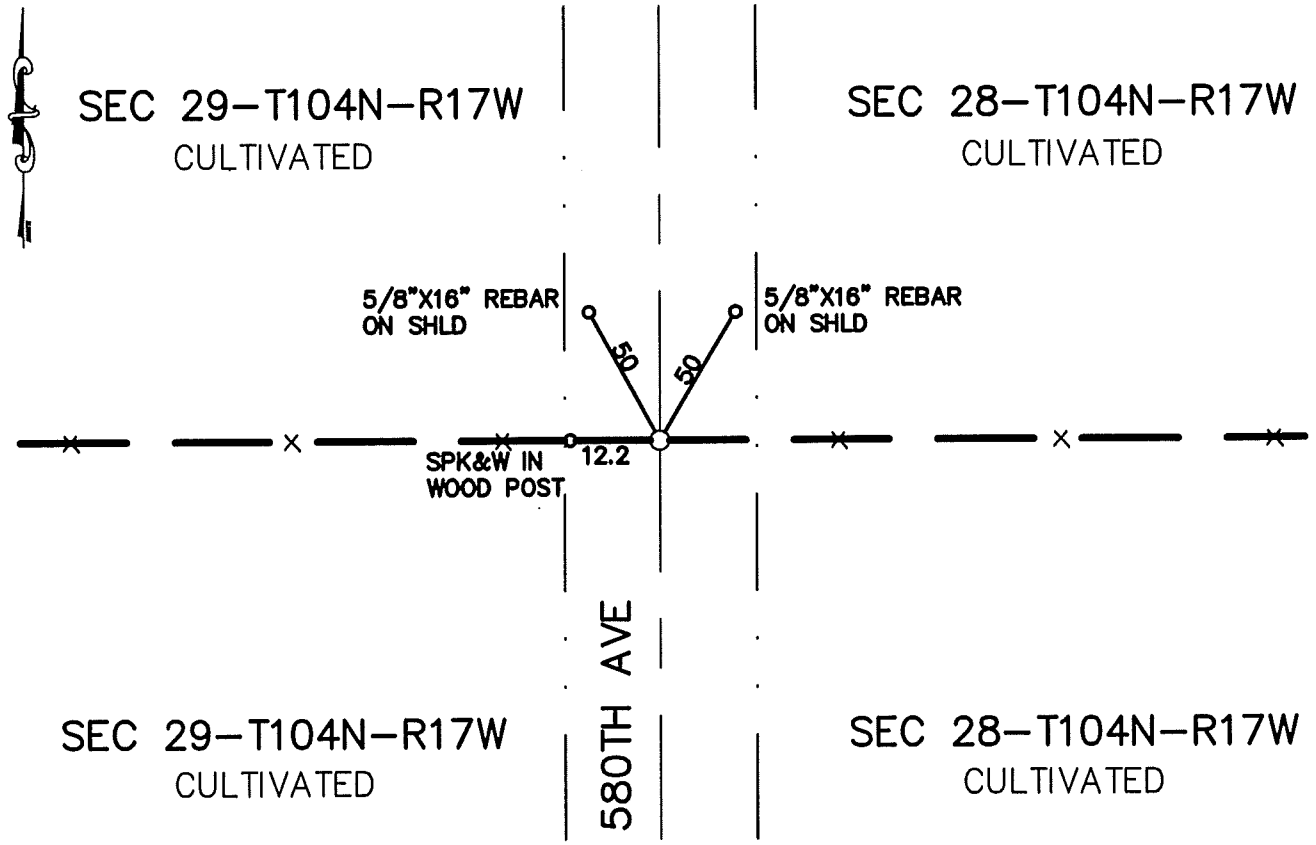

JONES, HAUGH & SMITH INC
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein were prepared by me or under my direct supervision.

SIGNATURE _____ DATE 8-30-04

Registration No. 13807

☒ Land Surveyor, ☐ Professional Engineer

☒ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER

County of _____

I hereby certify that this document was filed in the County Rec. office at _____ .M. on the _____ day of _____ A.D., 20___

COUNTY RECORDER _____

By _____, Deputy

DOCUMENT NO. _____

M.H.D. FORM NO. 2105

W 1/4 Corner Section 28-T104N-R17W

Deputy Surveyor of the U.S. General Land Office originally established this corner in . The government notes show a wood post was set with mound of earth and trench.

The following were contacted for section corner information.

Mower County Highway Department
Mower County Recorder
Tucker Land Surveying

2004 Jones Haugh and Smith crew, under direction of John Schulte, Mower County Surveyor RLS 13807, dug Boe Brothers backhoe at the centerline of 580th Avenue North-South and in line with line fence East-West. Dug to virgin soil and found no evidence of the original PLS corner. Placed a 5/8"x16" rebar with cast iron monument at said intersection.

The monument is in agreement with the record and is accepted as best evidence of a perpetuation of the original public land survey corner.

For electronic survey data and analysis, contact the firm of Jones, Haugh and Smith Inc.

Recorded at Register of Deeds 4-21-77 "A" Index No. TIE BOOK P-61, "A" P.26

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

NORTHEAST Corner of Section 28, Township 104N, Range 17W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch:

☒ On 7-7-72 (DATE) found a 6 INCH BY 6 INCH CONCRETE MONUMENT, DOWN 1.0 FOOT

☒ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☒ On 4-25-75 (DATE) placed a MND CAST IRON MONUMENT ABOVE CONCRETE MONUMENT (FLUSH)

SKETCH OF REFERENCE TIES

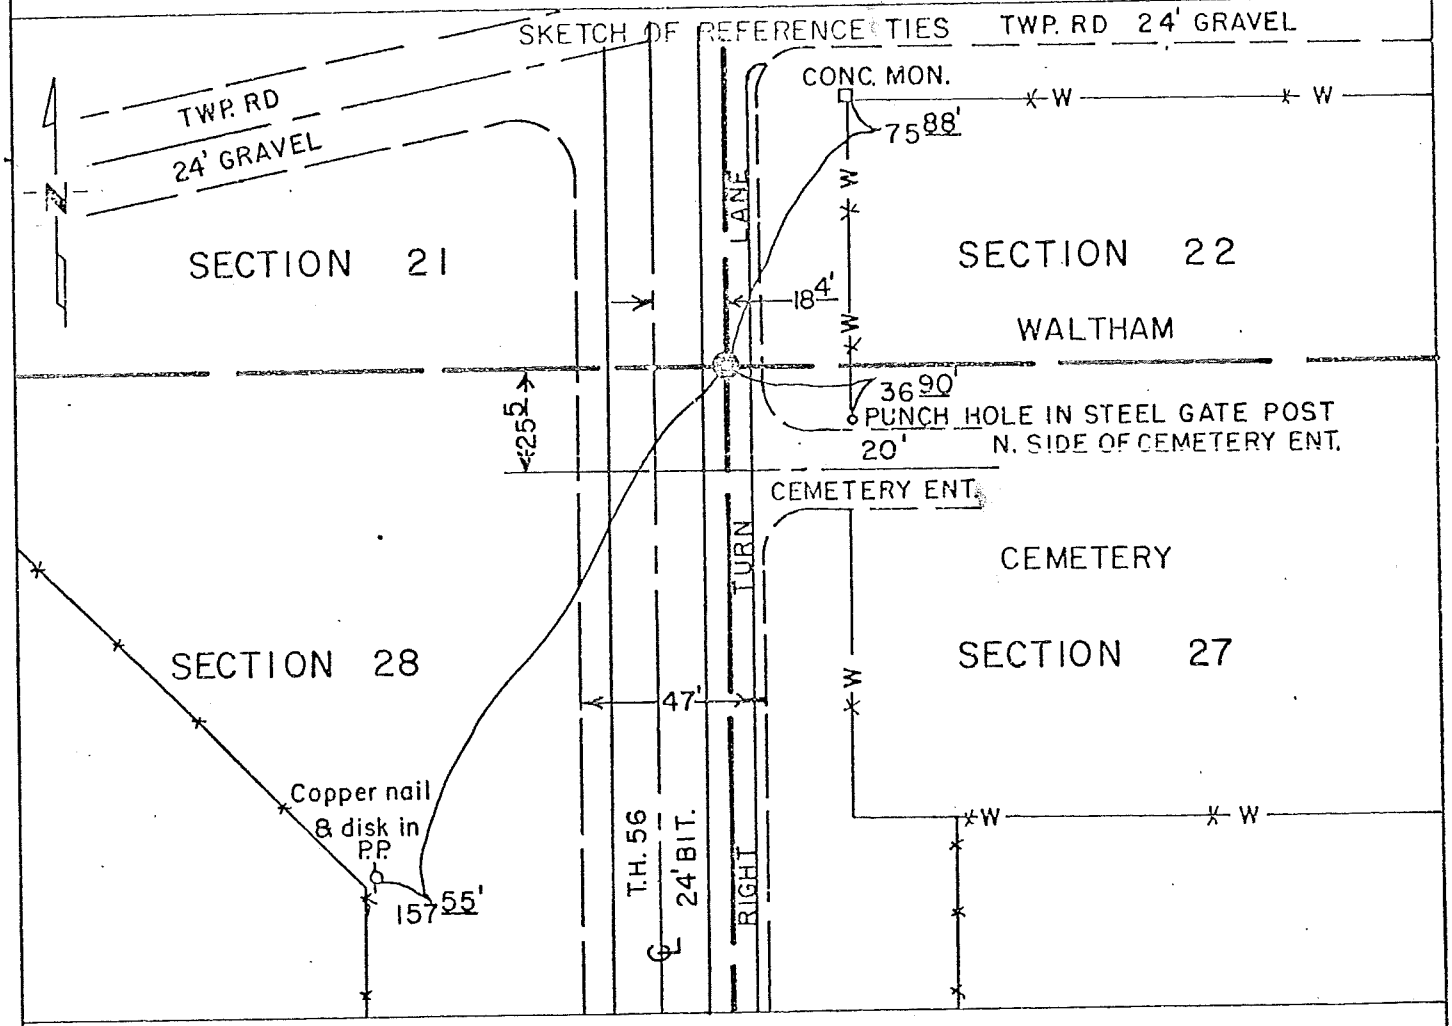

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

Donald K. Bohnsack (SIGNATURE) 9/8/75 (DATE)

Registration No. 10162

☒ Land Surveyor, ☐ Professional Engineer

☐ County Surveyor, ☐ County Engineer

OFFICE OF THE REGISTER OF DEEDS

County of _____

I hereby certify that this document was filed in the Reg. of Deeds office at _____ .M. on the _____ day of _____ A.D., 19__

Register of Deeds _____

By _____, Deputy

DOCUMENT NO. _____

MHD FORM NO. 2105

Statement of Evidence:

NORTHEAST CORNER OF SECTION 28, TOWNSHIP 104 N, RANGE 17 W, 5th P.M.

November 1853 — John Fitzpatrick, Deputy Surveyor, set post for corner during the Original Public Land Survey.

July 1929 — C. Aasland, M.H.D. Engineer, found a stone 18.4 feet east of post 3.6 feet ahead of PI 1208+08.9 replaced with a 6 inch by 6 inch by 18 inch concrete marker on May 5, 1930.

1941 — O. J. Gerner, M.H.D. Engineer, found a 6 inch by 6 inch concrete monument 18.4 feet east of POST 3.6 feet ahead of PI 1208+08.9, 28 inches below the surface.

1955 — E. L. Pehrson, M.H.D. Engineer, found a 6 inch by 6 inch concrete monument inplace 0.3 feet below surface 18.3 feet east of 1208+12.0.

July 1972 — A. L. Sotebeer, M.H.D. Engineer, found a 6 inch by 6 inch concrete monument 18.4 feet east of P.O.S.T. 1208+12.5, 1.0 feet below surface.

April 1975 — M.H.D. placed a cast iron monument above the concrete monument for the corner.

An analysis of the record data indicates the concrete monument was set in 1930 to replace the stone found in 1929. The concrete monument is accepted as a perpetuation of the Public Land Survey Corner.

For details of the Survey contact the District Surveying and Mapping Section of the Minnesota Highway Department, Rochester.

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

N 1/4 Corner of Section 28, Township 104N Range 17W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch

☐ On – (DATE) found a –

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 07/13/04 (DATE) placed a 5/8"X16" REBAR WITH CAST IRON MONUMENT

SKETCH OF REFERENCE TIES

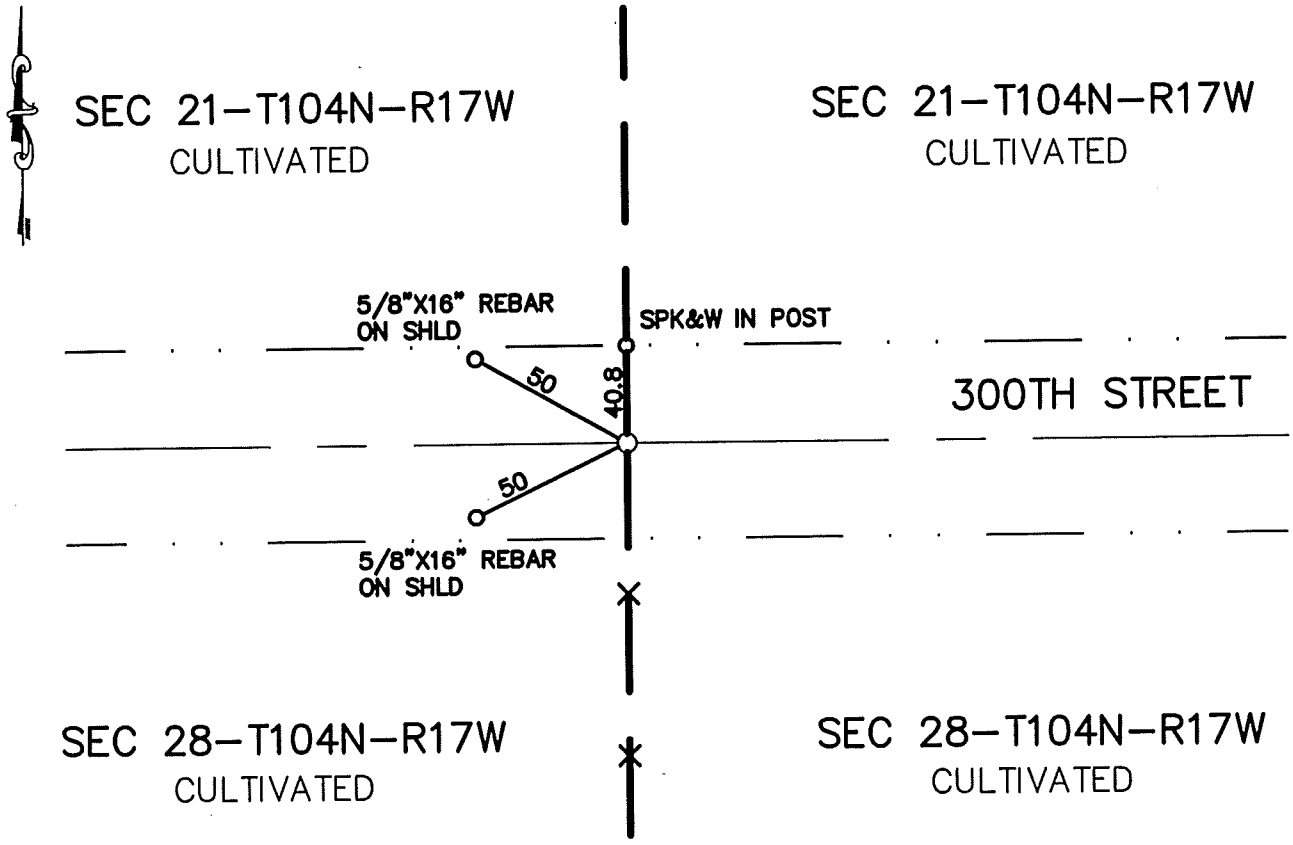

JONES, HAUGH & SMITH INC
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein were prepared by me or under my direct supervision.

_____ (SIGNATURE) 8-30-04 (DATE)

Registration No. 13807

☒ Land Surveyor, ☐ Professional Engineer

☒ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER

County of _____

I hereby certify that this document was filed in the County Rec. office at _____ .M. on the _____ day of _____ A.D., 20___

COUNTY RECORDER _____

By _____, Deputy

DOCUMENT NO. _____

M.H.D. FORM NO. 2105

N ¼ Corner Section 28-T104N-R17W

Deputy Surveyor of the U.S. General Land Office originally established this corner in . The government notes show a wood post was set with mound of earth and trench.

The following were contacted for section corner information.

Mower County Highway Department
Mower County Recorder
Tucker Land Surveying

2004 Jones Haugh and Smith crew, under direction of John Schulte, Mower County Surveyor RLS 13807, dug with Mower County backhoe at the intersection of 300th Street East-West and line fence south and found that this area was in a cut section of the road and any evidence of PLS corner would have been destroyed. Found no evidence of the original PLS corner. Placed a 5/8"x16" rebar with cast iron monument at said intersection 0.60' below road surface.

The monument is in agreement with the record and is accepted as best evidence of a perpetuation of the original public land survey corner.

For electronic survey data and analysis, contact the firm of Jones, Haugh and Smith Inc.

Recorded at Register of Deeds 4-21-77 "5" TIE BOOK p. 61, "C" P96 Index No.

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

EAST QUARTER Corner of Section 28, Township 104 N, Range 17 W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch:

☐ On _____ (DATE) found a _____

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☒ On 4-25-75 (DATE) placed a CAST IRON MONUMENT DOWN 3 INCHES.

SKETCH OF REFERENCE TIES

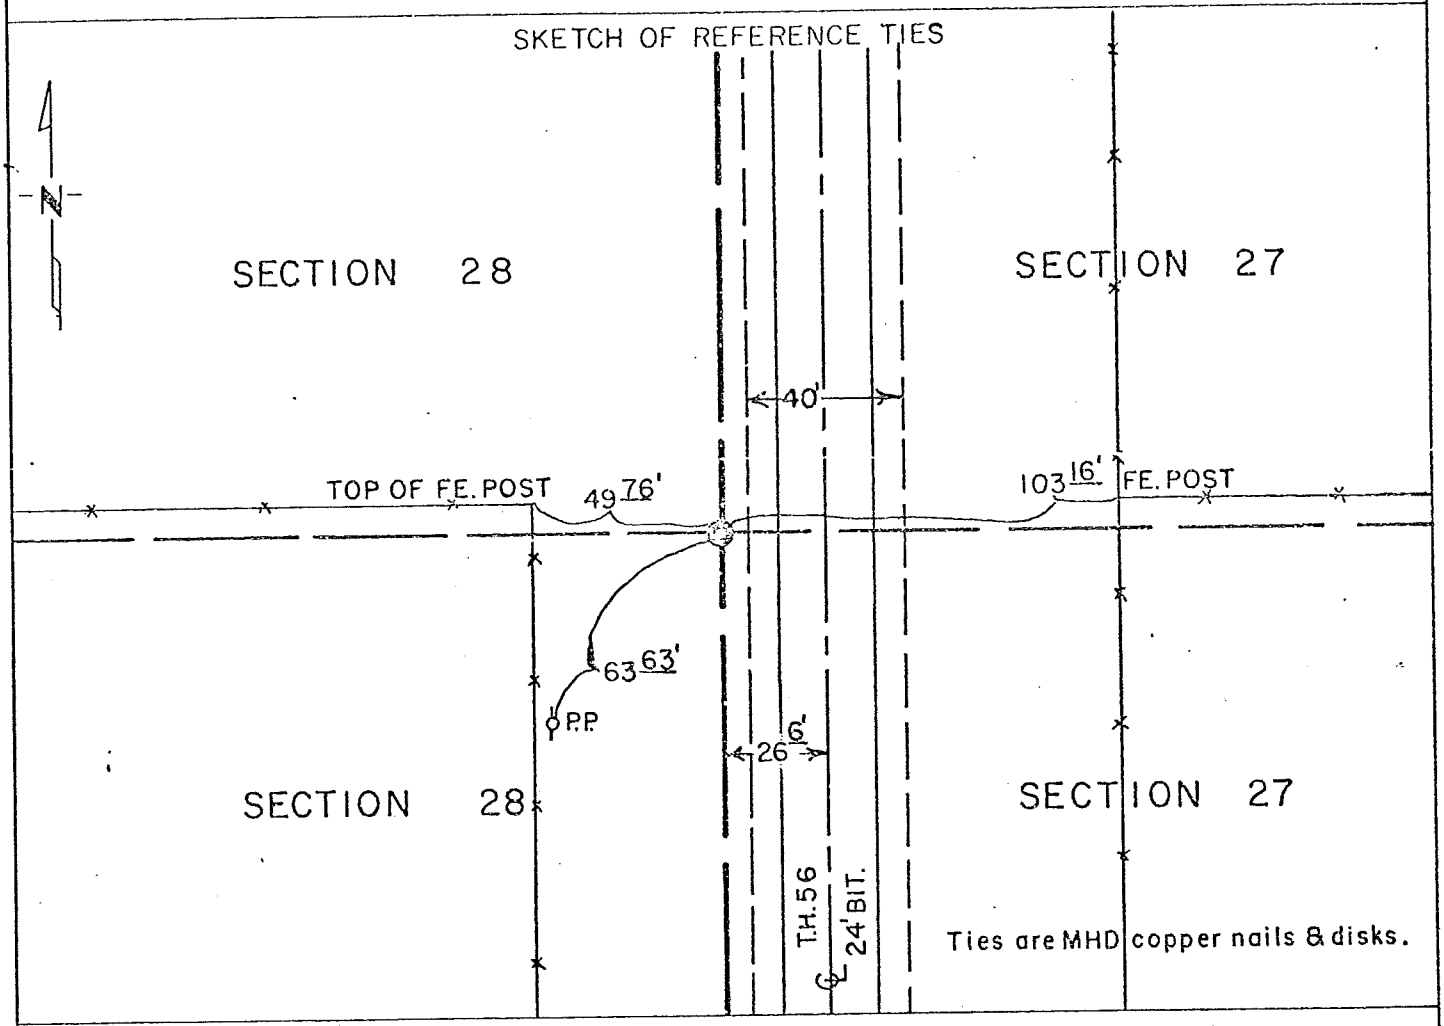

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

Ronald R Beckendorf (SIGNATURE) 9/8/75 (DATE)

Registration No. 10162

☒ Land Surveyor, ☐ Professional Engineer

☐ County Surveyor, ☐ County Engineer

OFFICE OF THE REGISTER OF DEEDS

County of _____

I hereby certify that this document was filed in the Reg. of Deeds office at _____ .M. on the _____ day of _____ A.D., 19__

Register of Deeds _____

By _____, Deputy

DOCUMENT NO. _____

MHD FORM NO. 2105

Statement of Evidence:

EAST QUARTER CORNER OF SECTION 28, TOWNSHIP 104N, RANGE 17 W 5th P.M.

November 1853 — John Fitzpatrick, Deputy Surveyor, set post, deposited stone, made a mound of earth and sod with trench and pits during the Original Public Land Survey.

July 1929 — C. Aasland, M.H.D. Engineer, found a iron pin 26.6 feet west of POT 1181+52.8. Replaced with a 6 inch by 6 inch by 18 inch concrete marker on May 5, 1930.

1941 — O. J. Gerner, M.H.D. Engineer, found a 6 inch by 6 inch concrete monument 18 inches below surface, 26.6 feet west of POT 1181+52.8. Minnesota Highway Department regraded T.H. 56.

August 1972 — M.H.D. field searched the area 26.6 feet west of POT 1181+52.8 and found nothing.

April 1975 — M.H.D. placed a cast iron monument 3 inches below ground level 26.6 feet west of POT 1181+52.8.

An analysis of the record data indicates the concrete monument, which was set in 1930 to replace the iron pin found in 1929, was destroyed during road construction in 1955. The Cast Iron Monument was set from the alignment ties to the concrete monument and is accepted as a perpetuation of the Public Land Survey Corner.

For details of the Survey contact the District Surveying and Mapping Section of the Minnesota Highway Department, Rochester.

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

Northeast Corner of Section 31, Township 104, Range 17, 5th P.M. STATE OF MINNESOTA, County of Mower


At the corner location shown on the sketch:

☐ On 5-16-90 found a 20 penny spike.

☐ left monument as found, ☐ lowered monument, ☒ removed monument (expl.)

☐ On 6-22-90 placed a Standard County Monument.

SKETCH OF REFERENCE TIES

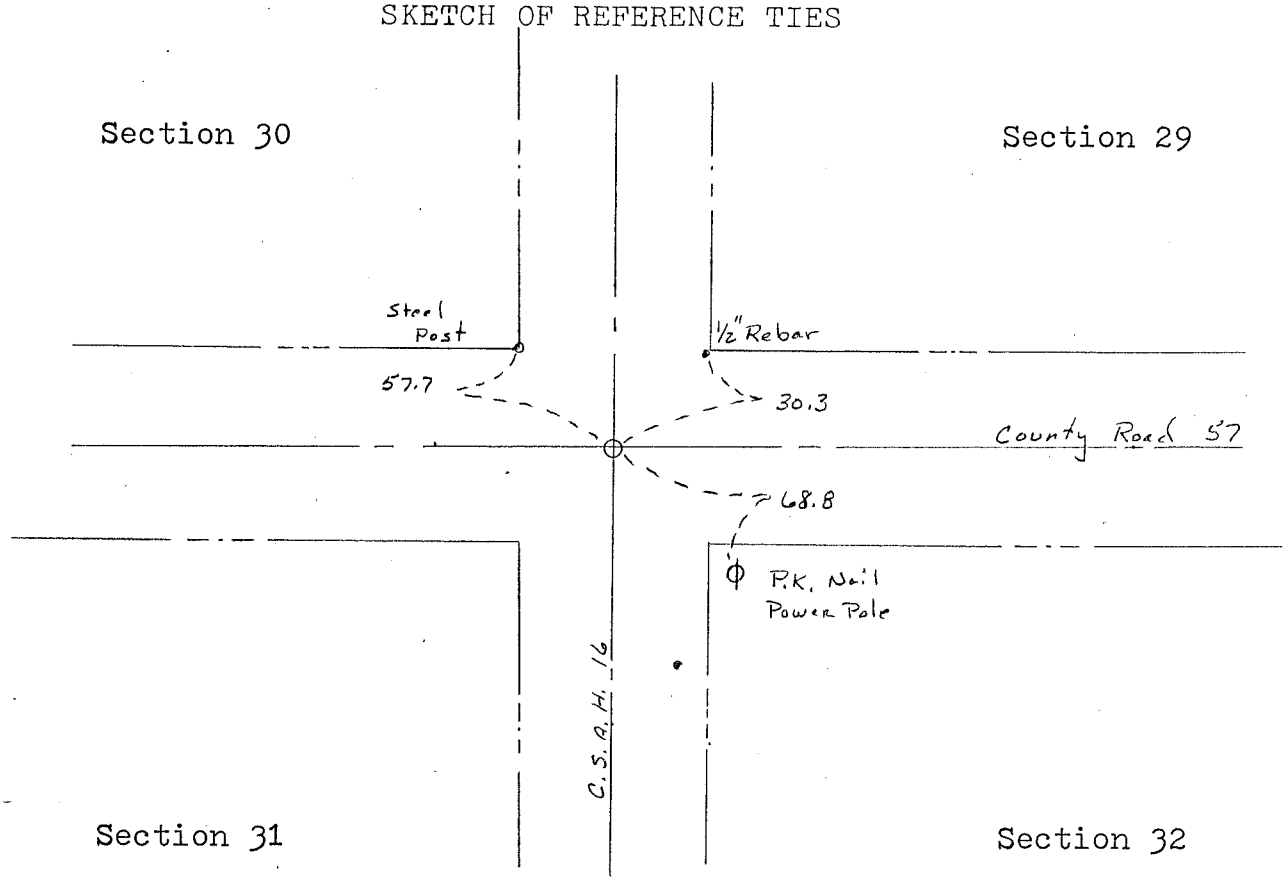

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

Raymond J. Tauer — Signature

6-25-90 — Date

Registration No. 15471

☒ Land Surveyor, ☐ Prof. Engineer

☐ County Surveyor, ☐ County Engr.

OFFICE OF THE COUNTY RECORDER
County of _____

I hereby certify that this document was filed in the County Recorders office at _____.M. on the ___ day of _____ A.D., 19___.

County Recorder _____

By _____, Deputy

DOCUMENT NO. _____

STATEMENT OF EVIDENCE:

NORTHEAST CORNER SECTION 31 - T104N - R17W

1853 - John Fitzpatrick, Deputy Surveyor, set a corner section post deposited a stone, made mound of earth and sod with trench and pits during the Original Public Land Survey.

1931 - Mower County Highway Department notes show a large pointed granite rock.

1970 - Mower County Highway Department notes show an inplaced concrete monument below a bit. surface.

May 1990 - Tucker Land Surveying excavated this location and found a 20 penny spike. Excavated 3 feet deep x 6 feet North-South x 4 feet East-West, found nothing. Replaced spike with a standard County Monument.

The above corner agrees with a electronic survey made of monuments and occupation lines in the area and is accepted as a perpetuation of the public land survey corner.

For details of the analysis and electric survey data contact: Tucker Land Surveying, Dexter, Minnesota 55926.

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

W 1/4 Corner of Section 32, Township 104N Range R17W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch

☐ On 1980 (DATE) found a concrete monument with 1/2"ø iron pin

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 9-22-99 (DATE) placed a cast iron monument over 5/8"ø at road surface

SKETCH OF REFERENCE TIES

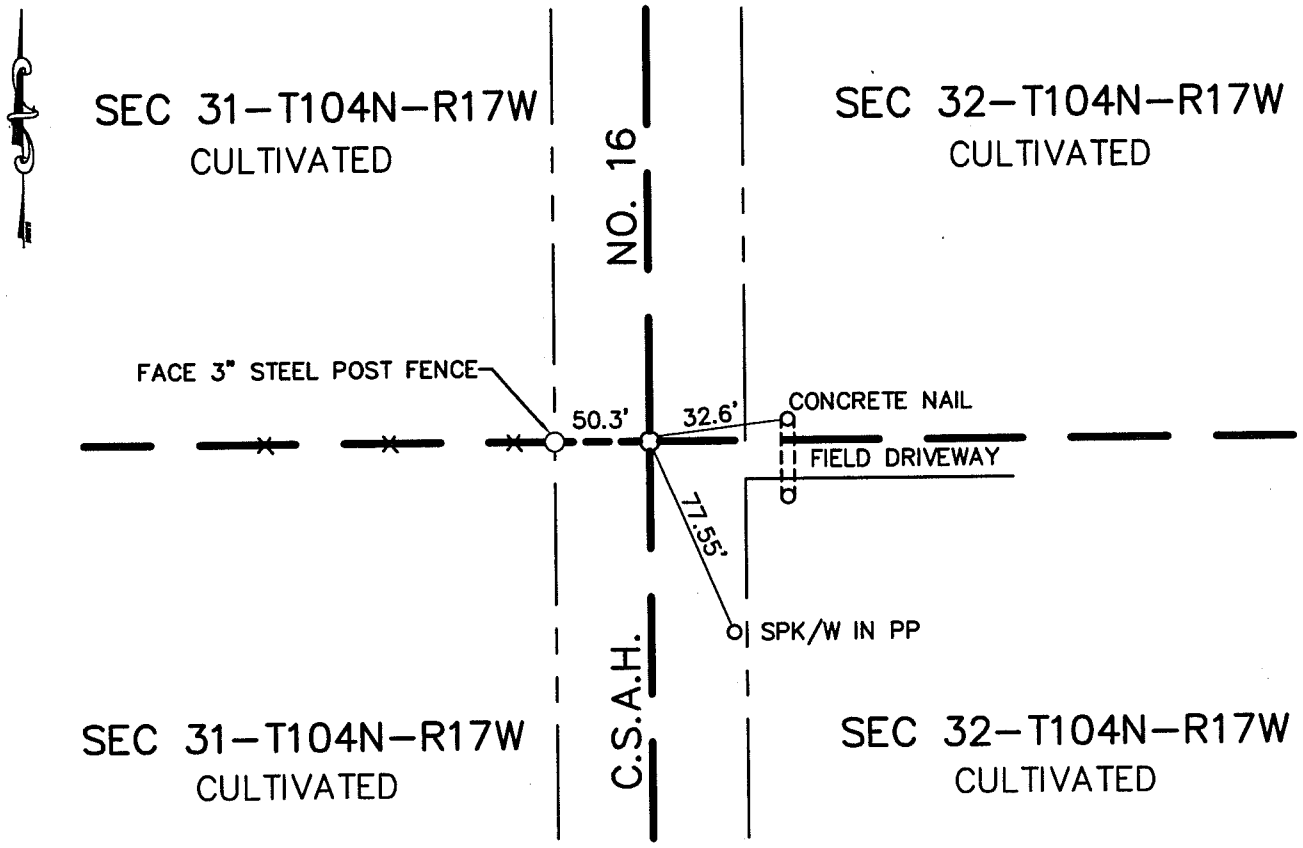

JONES, HAUGH & SMITH INC
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein were prepared by me or under my direct supervision.

SIGNATURE _____ DATE 10-22-99

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☒ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER

County of _____

I hereby certify that this document was filed in the County Rec. office at _____ .M. on the _____ day of _____ A.D., 19___

COUNTY RECORDER _____

By _____, Deputy

DOCUMENT NO. _____

M.H.D. FORM NO. 2105

W 1/4 Cor Sec 32-104-17

This corner was originally established by Deputy Surveyor John Fitzpatrick of the U.S. General Land Office in 1853. The government notes show a wood post was set with mound of earth and trench.

The following were contacted for section corner information.

Mower County Highway Dept.
Mower County Recorder
Tucker Land Surveying

No record of this corner was obtained from the above mentioned offices.

1980 Jones Haugh and Smith crew, under direction of John Schulte, Mower County Surveyor RLS 13807, uncovered concrete monument with 1/2" iron pin, on the centerline of C.S.A.H. NO. 16 and in line with line fence west. Set capped 5/8" over monument found - cap NO. 13807.

1999 Jones Haugh and Smith crew, under direction of John Schulte, Mower County Surveyor RLS 13807, uncovered capped 13807 5/8" iron .60' below road surface on the centerline of C.S.A.H. NO. 16 and in line with line fence west. Removed cap and set cast iron monument over 5/8" at road surface.

The monument fits occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

For electronic survey data and analysis, contact the firm of Jones, Haugh and Smith Inc.

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

Northeast Corner of Section 32, Township 104, Range 17, 5th P.M. STATE OF MINNESOTA, County of Mower


At the corner location shown on the sketch:

☐ On 5-16-90 found a 1/2" Rebar.

☒ left monument as found, ☐ lowered monument, ☐ removed monument (expl.)

☐ On _____ placed a _____

SKETCH OF REFERENCE TIES

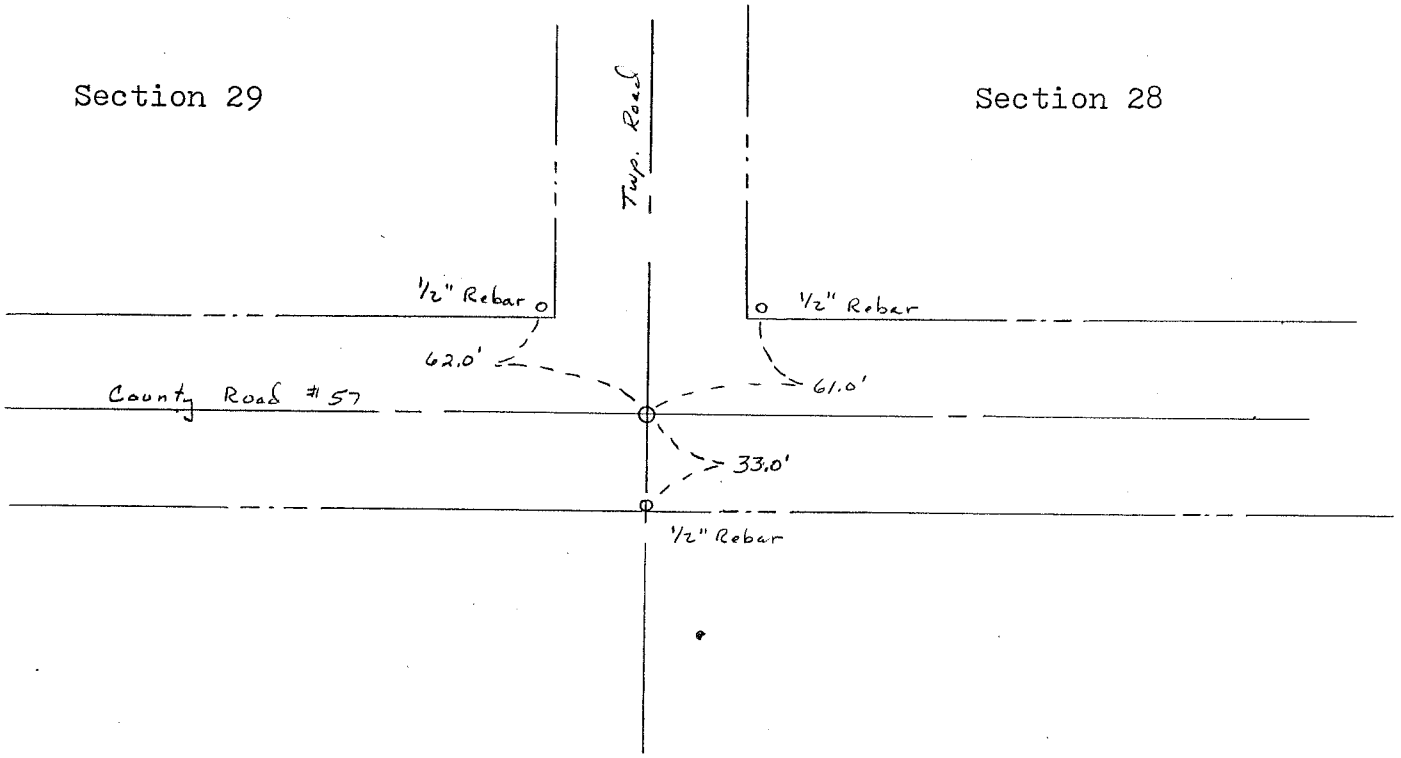

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

Raymond M Tucker — Signature

6-25-90 — Date

Registration No. 15471

☒ Land Surveyor, ☐ Prof. Engineer

☐ County Surveyor, ☐ County Engr.

OFFICE OF THE COUNTY RECORDER
County of _____

I hereby certify that this document was filed in the County Recorders office at _____.M. on the ___ day of _____ A.D., 19____.

County Recorder _____

By _____, Deputy

DOCUMENT NO. _____

STATEMENT OF EVIDENCE:

NORTHEAST CORNER SECTION 32 - T104N - R17W

1853 - John Fitzpatrick, Deputy Surveyor, set a corner section post during the Original Public Land Survey.

1970 - Mower County Highway Department notes show reference points to corner and an inplaced concrete monument.

May 1990 - Tucker Land Surveying excavated this location and found a 1/2" Rebar. Continued to excavate to 5 feet deep and found nothing. Accepted Rebar as corner.

The above corner agrees with a electronic survey made of monuments and occupation lines in the area and is accepted as a perpetuation of the public land survey corner.

For details of the analysis and electronic survey data contact: Tucker Land SUrveying, Dexter, Minnesota 55926.

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

North Quarter Corner of Section 32, Township 104, Range 17, 5th P.M. STATE OF MINNESOTA, County of Mower


At the corner location shown on the sketch:

☐ On 5-16-90 found a Rebar with Cap No. 13807.

☒ left monument as found, ☐ lowered monument, ☐ removed monument (expl.)

☐ On _____ placed a _____

SKETCH OF REFERENCE TIES

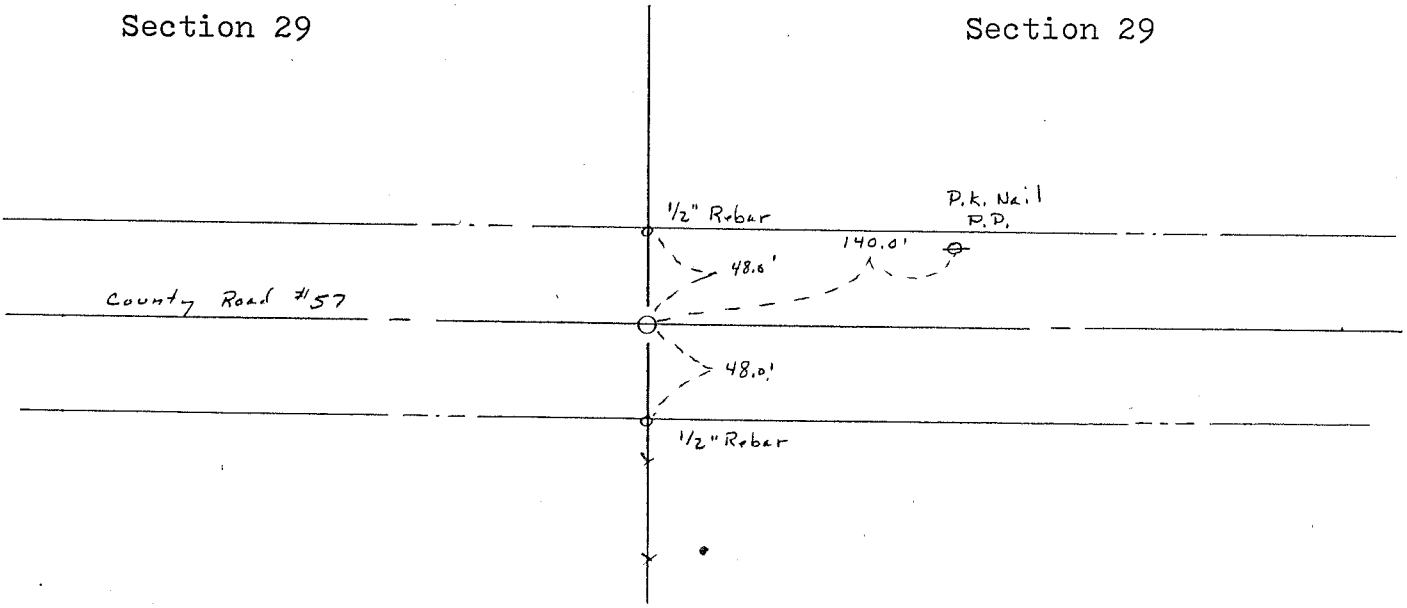

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

Raymond R. Tubbs — Signature
6-25-90 — Date

Registration No. 15471
☒ Land Surveyor, ☐ Prof. Engineer
☐ County Surveyor, ☐ County Engr.

OFFICE OF THE COUNTY RECORDER
County of _____

I hereby certify that this document was filed in the County Recorders office at _____.M. on the ___ day of _____ A.D., 19___.

County Recorder _____

By _____, Deputy

DOCUMENT NO. _____

STATEMENT OF EVIDENCE:

NORTH QUARTER CORNER SECTION 32 - T104N - R17W

1853 - John Fitzpatrick, Deputy Surveyor, set a quarter section post deposited a stone, made mound of earth and sod with trench and pits during the Original Public Land Survey.

1970 - Mower County Highway Department notes show an inplaced concrete monument during County Proj. No. 7001.

May 1990 - Tucker Land Surveying excavated this location and found a rebar with Cap No. 13807. Accepted as corner.

The above corner agrees with a electronic survey made of monuments and occupation lines in the area and is accepted as a perpetuation of the public land survey corner.

For details of the analysis and electric survey data contact: Tucker Land Surveying, Dexter, Minnesota 55926.

NW Cor E½ NE¼ Sec. 32

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

Point of Intersection Corner of Section 32, Township 104, Range 17, 5th P.M. 39+71 STATE OF MINNESOTA, County of Mower

At the corner location shown on the sketch:

☐ On 5-16-90 found a 3/4" Rebar


☒ left monument as found, ☐ lowered monument, ☐ removed monument (expl.)

☐ On _____ placed a _____

SKETCH OF REFERENCE TIES

Section 29

Note: P.I. Station 39+71

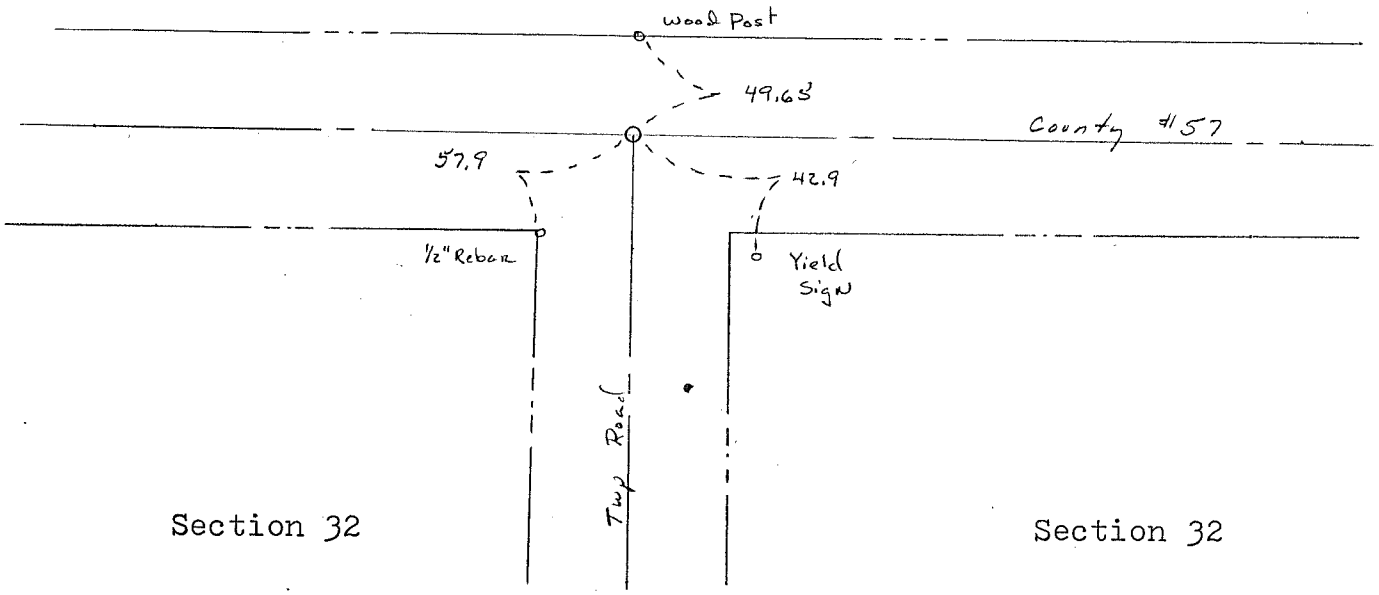

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

Raymond K Tuck — Signature
6-25-90 — Date

Registration No. 15471
☒ Land Surveyor, ☐ Prof. Engineer
☐ County Surveyor, ☐ County Engr.

OFFICE OF THE COUNTY RECORDER
County of _____

I hereby certify that this document was filed in the County Recorders office at _____.M. on the ___ day of _____ A.D., 19____.

County Recorder _____

By _____, Deputy

DOCUMENT NO. _____

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

SW Corner of Section 32, Township 104N, Range 17W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch:

☐ On 4-2-90 (DATE) found a 1/2"Ø iron cast in 6" clay tile surrounded by 3 bricks 3.0' below road surface.

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 4-2-90 (DATE) placed a cast iron monument over 6" clay tile.

SKETCH OF REFERENCE TIES

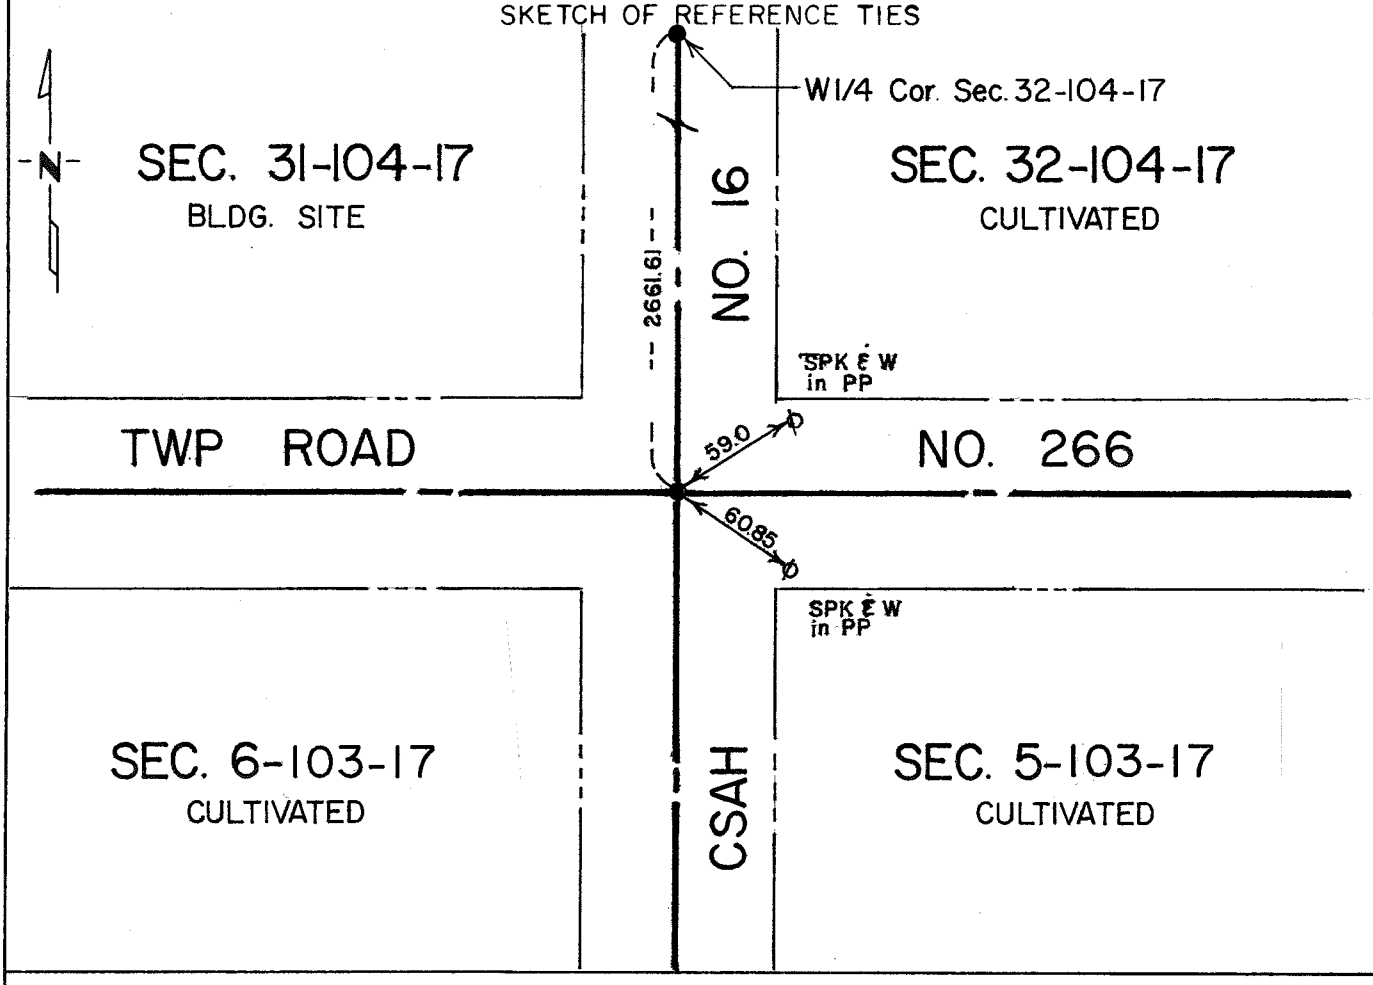

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

SIGNATURE _____ DATE 9-17-90

Registration No. 13807

☒ Land Surveyor, ☐ Professional Engineer

☐ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER

County of _____

I hereby certify that this document was filed in the County Rec. office at _____ .M. on the _____ day of _____ A.D., 19 ___

COUNTY RECORDER _____

By _____, Deputy

DOCUMENT NO. _____

M.H.D. FORM NO. 2105

STATEMENT OF EVIDENCE

SW corner Section 32-104-17

This corner was originally established by Deputy Surveyor John Fitzpatrick of the U.S. General Land Survey Office in 1853. The government notes show this corner was marked with a post with a trench and a mound of earth.

The following were contacted for section corner information:

Mower County Engineering Department
Mower County Recorder's Office

1931 V.A. Nason uncovered concrete tile with brick in center and took ties. Notes were recorded in Book 'A' in the County Engineer's Office.

1990 Jones, Haugh & Smith crew dug with a jackhammer on centerline centerline of north-south-east-west roads. Found a 1/2" diameter iron cast in 6" clay tiles surrounded by three bricks 3.0 feet below road surface. Placed a 5/8" diameter iron and cast iron monument over 6" clay tile found.

Corner found fits centerlines and is accepted as the best evidence of a perpetuation of the public land survey corner.

For electronic survey data and analysis contact the firm of Jones, Haugh & Smith Inc.

Index No. P.61

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

SW Corner of Section 32, Township 104, Range 17W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch:

☐ On 3-30-90 (DATE) found a 1/2"Ø iron cast in 6" clay tile surrounded by 3 bricks.

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 3-30-90 (DATE) placed a cast iron monument over clay tile.

SKETCH OF REFERENCE TIES

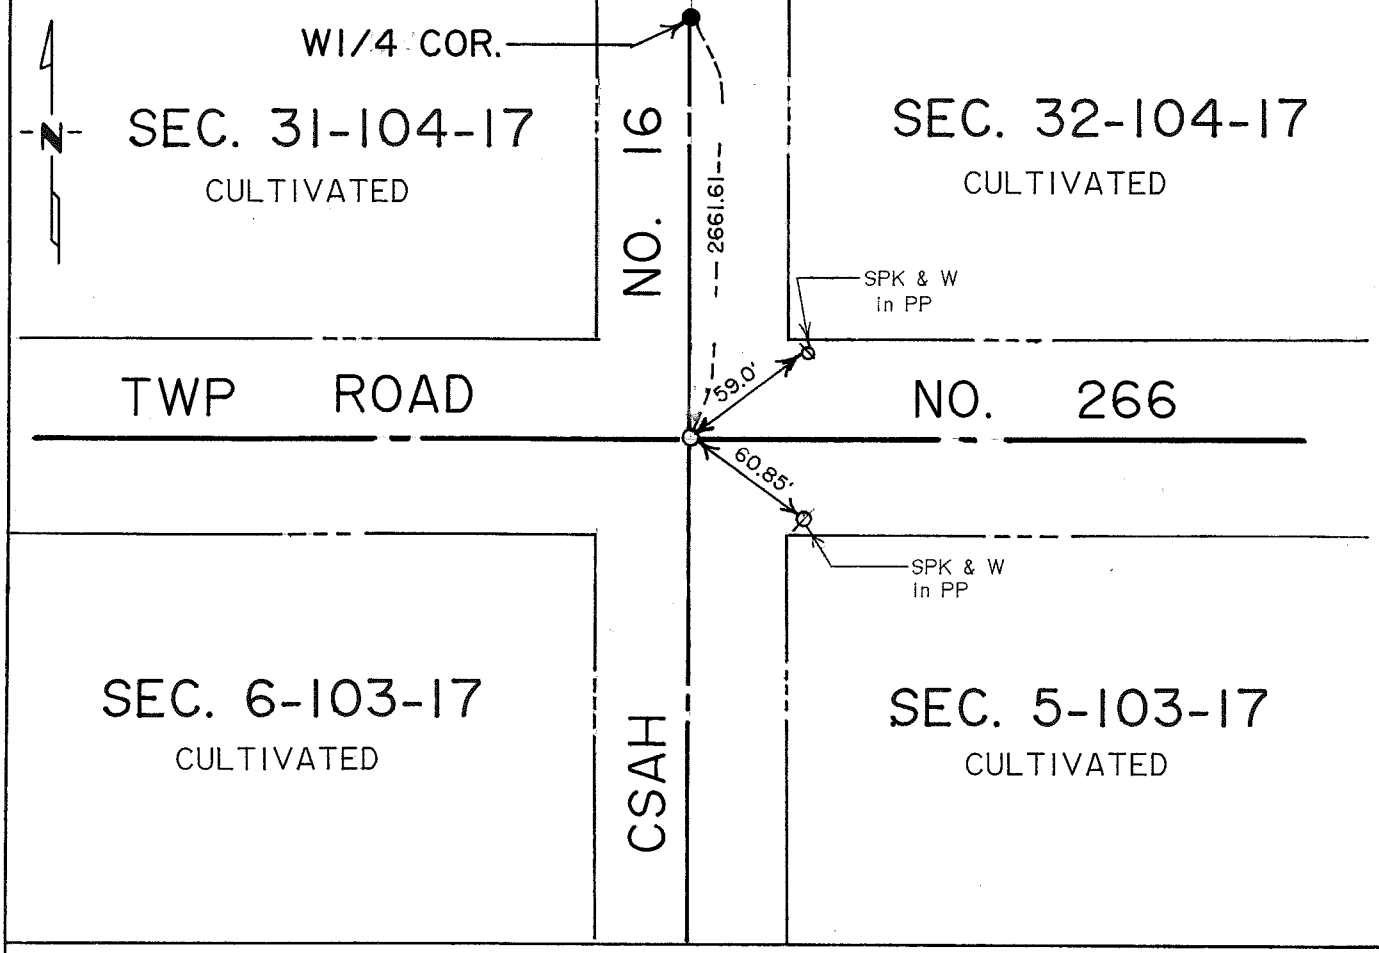

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

SIGNATURE 4-9-90 DATE

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☐ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER

County of _____

I hereby certify that this document was filed in the County Rec. office at _____ .M. on the _____ day of _____ A.D., 19 ___

COUNTY RECORDER _____

By _____, Deputy

DOCUMENT NO. _____

M.H.D. FORM NO. 2105

STATEMENT OF EVIDENCE

SW corner Section 32-104-17

This corner was originally established by Deputy Surveyor John Ball of the U.S. General Land Office in 1853. The government notes show this corner was marked with a charred stake in a mound of earth with a trench.

The following were contacted for section corner information:

Mower County Engineers Office
Mower County Recorders Office

Mower County Engineering Office - County Road Project shows an iron found.

1930 Records of A.C. White indicate clay tile with brick set at this location recorded in survey book in the Mower County Engineers Office.

1960 Mower County Grading Plan shows monument at this location.

1990 Jones, Haugh & Smith crew dug with a jackhammer and uncovered a 1/2" diameter iron in a 6" clay tile surround by three bricks 3.0 feet below road surface.

The monument found is in agreement with the records and is accepted as best evidence of Public Land Survey corner. Set cast iron monument over 6" clay tile.

For electronic survey data and analysis, contact the firm of Jones, Haugh & Smith Inc.

Recorded at Register of Deeds 4-21-77 TIE BOOK p 61 Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

NORTHEAST Corner of Section 33, Township 104N, Range 17W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch:

☒ On 8-17-72 (DATE) found a 6 INCH BY 6 INCH CONCRETE MONUMENT, DOWN 1½ FOOT.

☐ left monument as found, ☐ lowered monument, ☒ removed monument (explain)

☒ On 4-25-75 (DATE) placed a MINNESOTA HIGHWAY DEPARTMENT CAST IRON MONUMENT 1/2 INCH DOWN.

SKETCH OF REFERENCE TIES

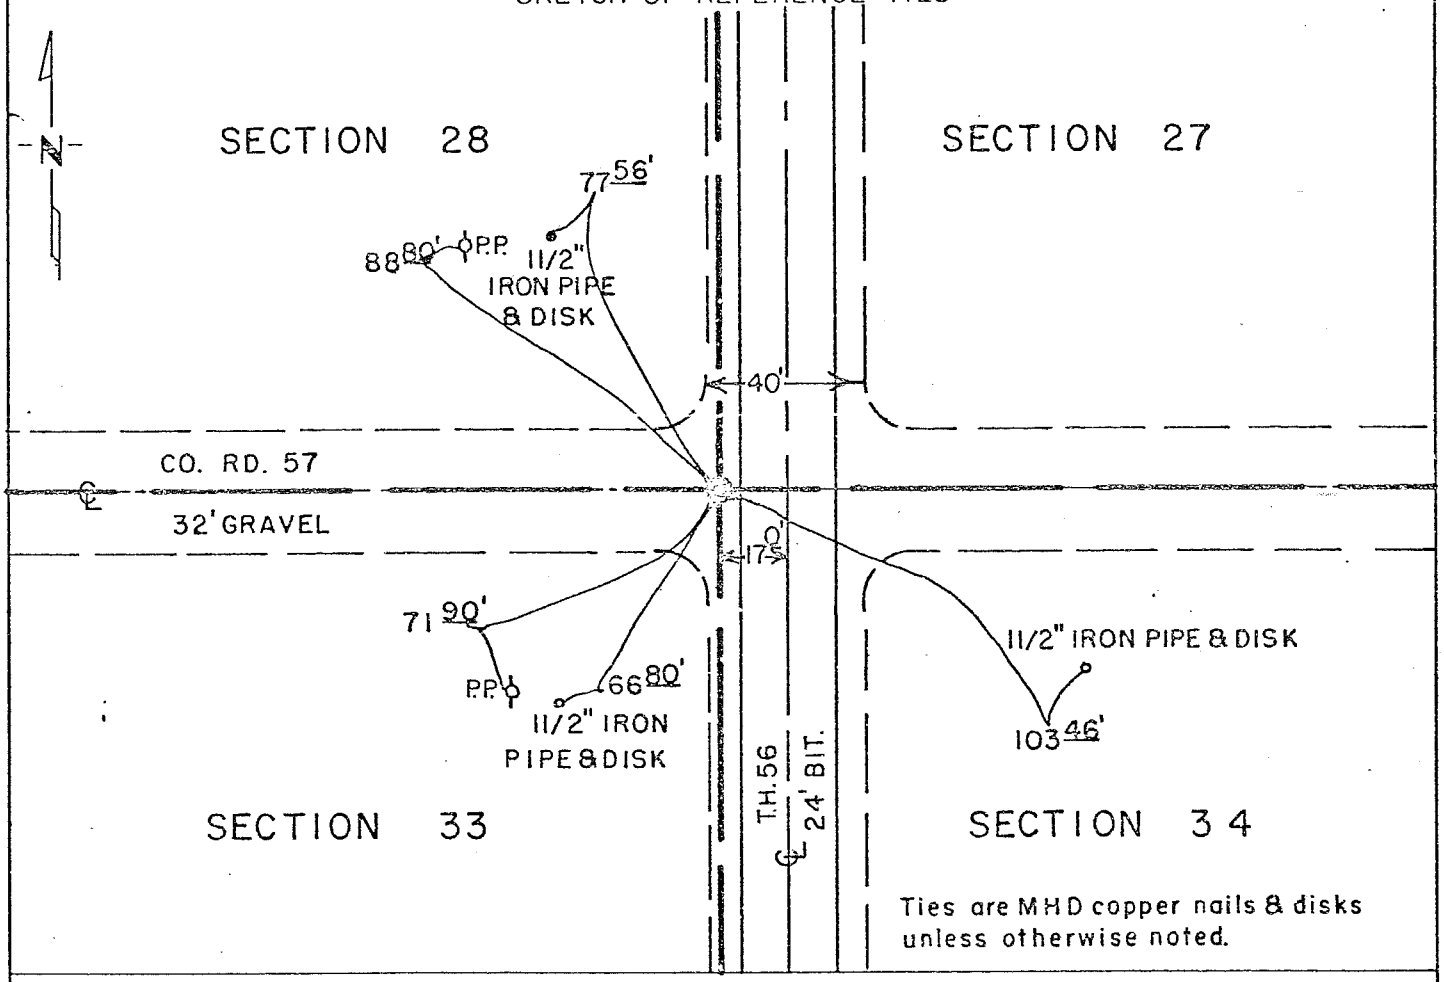

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

Ronald R Bielenberg 9/9/75
SIGNATURE DATE

Registration No. 8162

☒ Land Surveyor, ☐ Professional Engineer

☐ County Surveyor, ☐ County Engineer

OFFICE OF THE REGISTER OF DEEDS

County of _____

I hereby certify that this document was filed in the Reg. of Deeds office at _____ .M. on the _____ day of _____ A.D., 19__

Register of Deeds _____

By _____, Deputy

DOCUMENT NO. _____

M.H.D. FORM NO. 2105

Statement of Evidence:

NORTHEAST CORNER OF SECTION 33, TOWNSHIP 104N, RANGE 17 W, 5th P.M.

November 1853 — John Fitzpatrick, Deputy Surveyor, deposited stone, made mound of earth and sod with trench and pits during the Original Public Land Survey.

July 1929 — C. Aasland, M.H.D. Engineer, found a stone 17.0 feet west of POT 1155+13.7, replaced with a 6 inch by 6 inch by 18 inch concrete monument, May 6, 1930.

1941 — O. J. Gerner, M.H. D. Engineer, found a 6 inch by 6 inch concrete monument 18 inches below the surface, 17.0 feet west of PI 1155+14.2.

1955 — E. L. Pehrson, M.H.D. Engineer, found a 6 inch by 6 inch concrete monument 18 inches below the surface, 17.7 feet west of PI 1155+14.2.

August 1972 — A. L. Sotebeer, M.H.D. Engineer, found a 6 inch by 6 inch concrete monument 18 inches below the surface, 17.0 feet west of PI 1155+14.2

1973 — M.H. D. regraded T.H. #56.

April 1975 — M.H.D. replaced the 6 inch by 6 inch concrete monument, which was destroyed during construction, with a Cast Iron Monument 3 inches below the road surface.

An analysis of the record data indicates that the concrete monument, which was set in 1930 to replace the stone found in 1929, was destroyed during road construction in 1973. The Cast Iron Monument was set to replace the concrete monument and is accepted as a perpetuation of the Public Land Survey corner.

For details of the Survey contact the District Surveying and Mapping Section of the Minnesota Highway Department, Rochester.

Recorded at Register of Deeds 4-21-77 Index No. TIE BOOK P61

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

EAST QUARTER Corner of Section 33, Township 104N, Range 17W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch:

☒ On 8-11-72 (DATE) found a 3/4 INCH IRON PIN. (DOWN 2.0')

☒ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☒ On 4-25-75 (DATE) placed a MINNESOTA HIGHWAY DEPARTMENT CAST IRON MONUMENT ABOVE 3/4 INCH IRON PIN. (DOWN 1/2 INCH)

SKETCH OF REFERENCE TIES

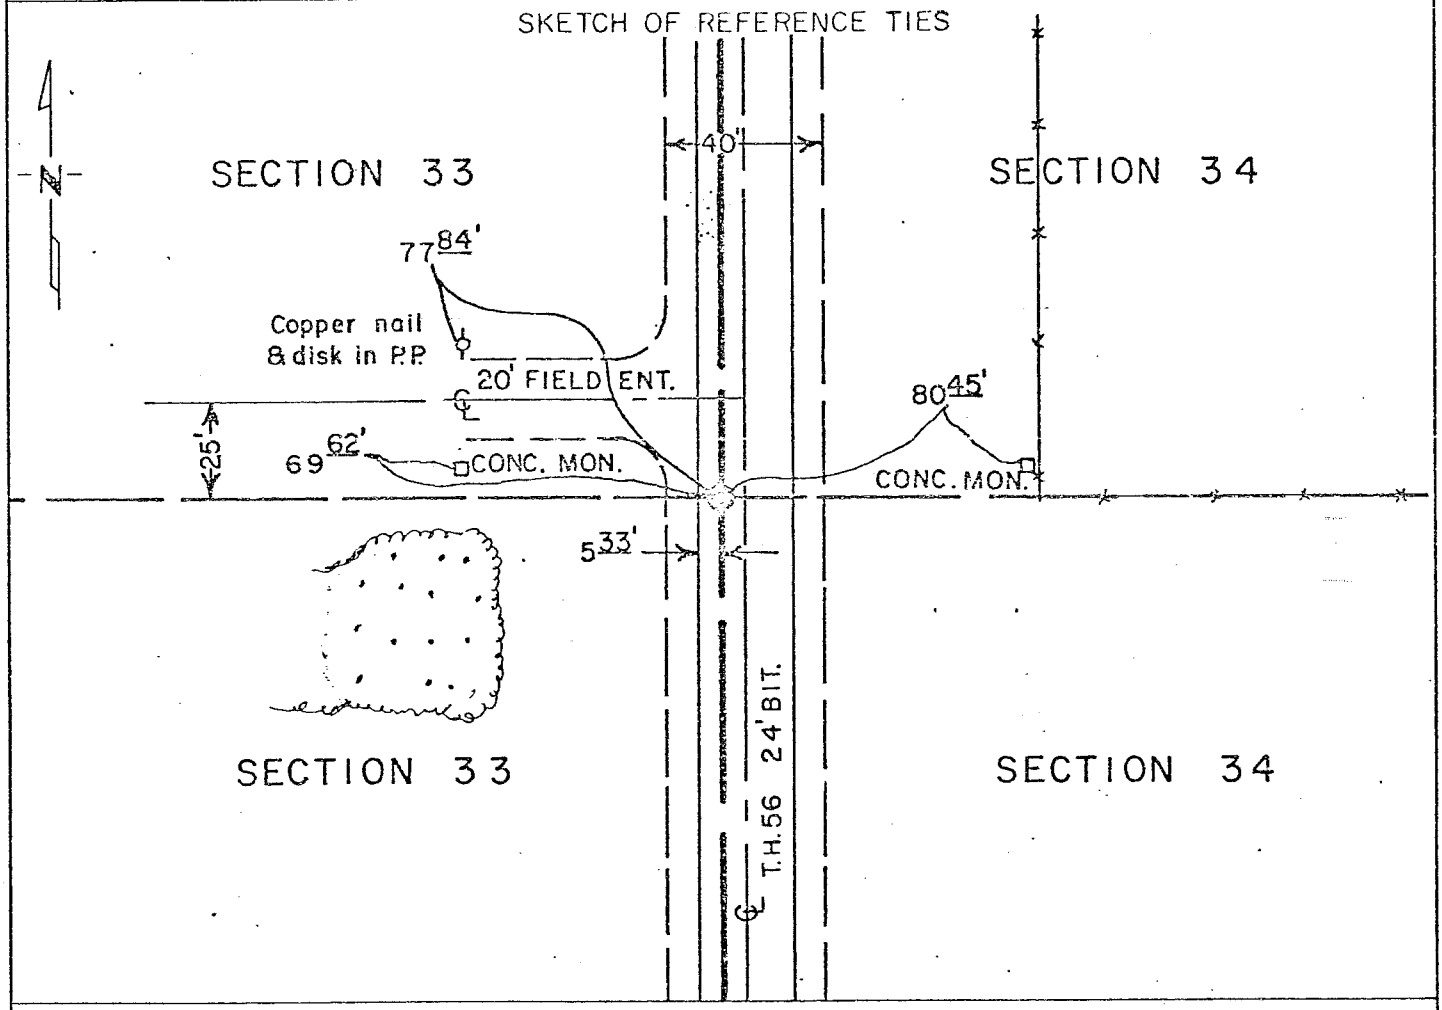

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

Donald R Richardson (SIGNATURE) 9/8/75 (DATE)

Registration No. 12162

☒ Land Surveyor, ☐ Professional Engineer

☐ County Surveyor, ☐ County Engineer

OFFICE OF THE REGISTER OF DEEDS

County of _____

I hereby certify that this document was filed in the Reg. of Deeds office at _____ .M. on the _____ day of _____ A.D., 19 ___

Register of Deeds _____

By _____, Deputy

DOCUMENT NO. _____

M.H.D. FORM NO. 2105

Statement of Evidence:

EAST QUARTER CORNER OF SECTION 33, TOWNSHIP 104N, RANGE 17W, 5th P.M.

November 1853 — John Fitzpatrick, Deputy Surveyor, set post, deposited stone, made mound of earth and sod with trench and pits during the Original Public Land Survey.

July 1929 — C. Aasland, M.H.D. Engineer, found a stone 5.5 feet west of P.O.T. 1128+32.1, replaced with an axel shaft on 5-6-30.

1941 — O. J. Gerner, M.H.D. Engineer, found a iron pin 14 inches below surface, 5.5 feet west, PI 1128+32.1.

1955 — E. L. Pehrson, M.H.D. Engineer, shows the 1/4 corner 5 feet west, PI 1128+35.8.

August 1972 — A. L. Sotebeer, M.H.D. Engineer, found a 3/4 inch iron pin 2.0 feet under surface, 5.33 feet west of PI 1128+32.1.

1973 — M.H.D. resurfaced T.H. 56 with bituminous.

April 1975 — M.H.D. placed a Cast Iron Monument above the 3/4 inch iron pin 1/2 inch below road surface.

An analysis of the record data indicates the 3/4 inch iron pin perpetuates the position of the stone found in 1929. The 3/4 inch iron pin is accepted as a perpetuation of the Public Land Survey Corner.

For details of the Survey contact the District Surveying and Mapping Section of the Minnesota Highway Department, Rochester.

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

SW Corner of Section 36, Township 104 Range 17, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch

☐ On 07/13/1995 (DATE) found a 1.5'X8" POINTED STONE

☒ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 07/13/1995 (DATE) placed a CAST IRON MONUMENT

SKETCH OF REFERENCE TIES

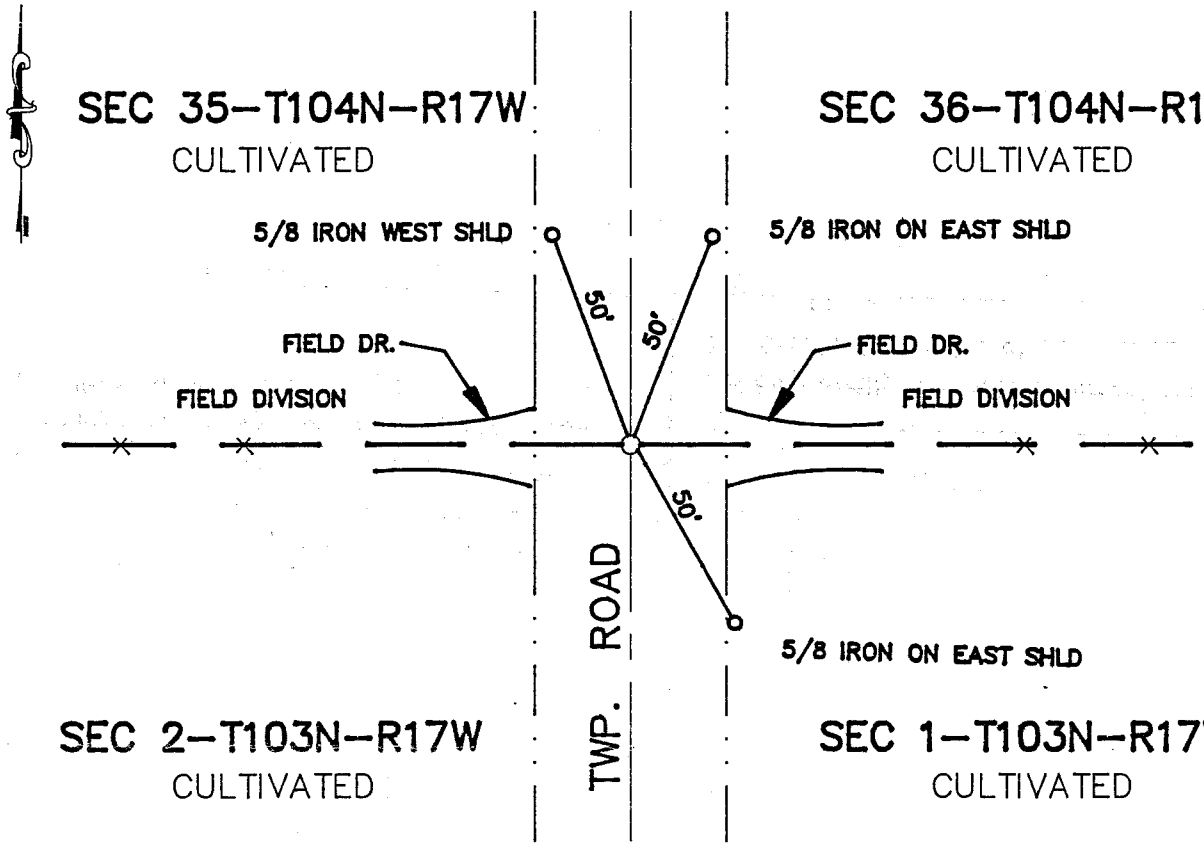

JONES, HAUGH & SMITH INC
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein were prepared by me or under my direct supervision.

SIGNATURE _____ DATE 1-26-96

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☒ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of Mower

I hereby certify that this document was filed in the County Rec. office at 3 P.M. on the 29 day of Jan A.D., 1996

COUNTY RECORDER Charles Engen

By Susan M. Davis, Deputy

DOCUMENT NO. 442199

M.H.D. FORM NO. 2105 BOOK 90 PAGE 103

Book 90 Misc Page 103

SW Cor SEC 36-104-17

This corner was originally established by Deputy Surveyor John Ball of the U.S. General Land Office in 1853. The government notes show a wood post was set with a mound of earth and trench.

The following were contacted for section corner information.

Mower County Highway Dept.
Mower County Recorder
Zenk Engineering
Tucker Land Surveying

No record of this corner was obtained from the above mentioned offices.

1995 Jones, Haugh and Smith crew, under direction of John Schulte, Mower County Surveyor RLS 13807, dug with county backhoe at the CL of township road and in line with field division East and West. Found a 1.5'x8" pointed stone 3' below road surface. Continued digging to virgin soil and found no other evidence. Stone fit the CL of road and fits the field divisions East and West. Accepted stone as a perpetuation of the original PLS corner. Placed a 5/8"x16" iron on the North side of the stone. Placed a cast iron monument over the stone found.

The monument fit occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

For electronic survey data and analysis, contact the firm of Jones, Haugh and Smith Inc.