Index No. _____

# CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

NW Corner of Section 6, Township 104N Range 17W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch

☐ On 09/02/1993 (DATE) found a CONCRETE TILE MONUMENT WITH 5/8" IRON IN THE CENTER

☒ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 09/02/1993 (DATE) placed a CAST IRON MONUMENT

SKETCH OF REFERENCE TIES

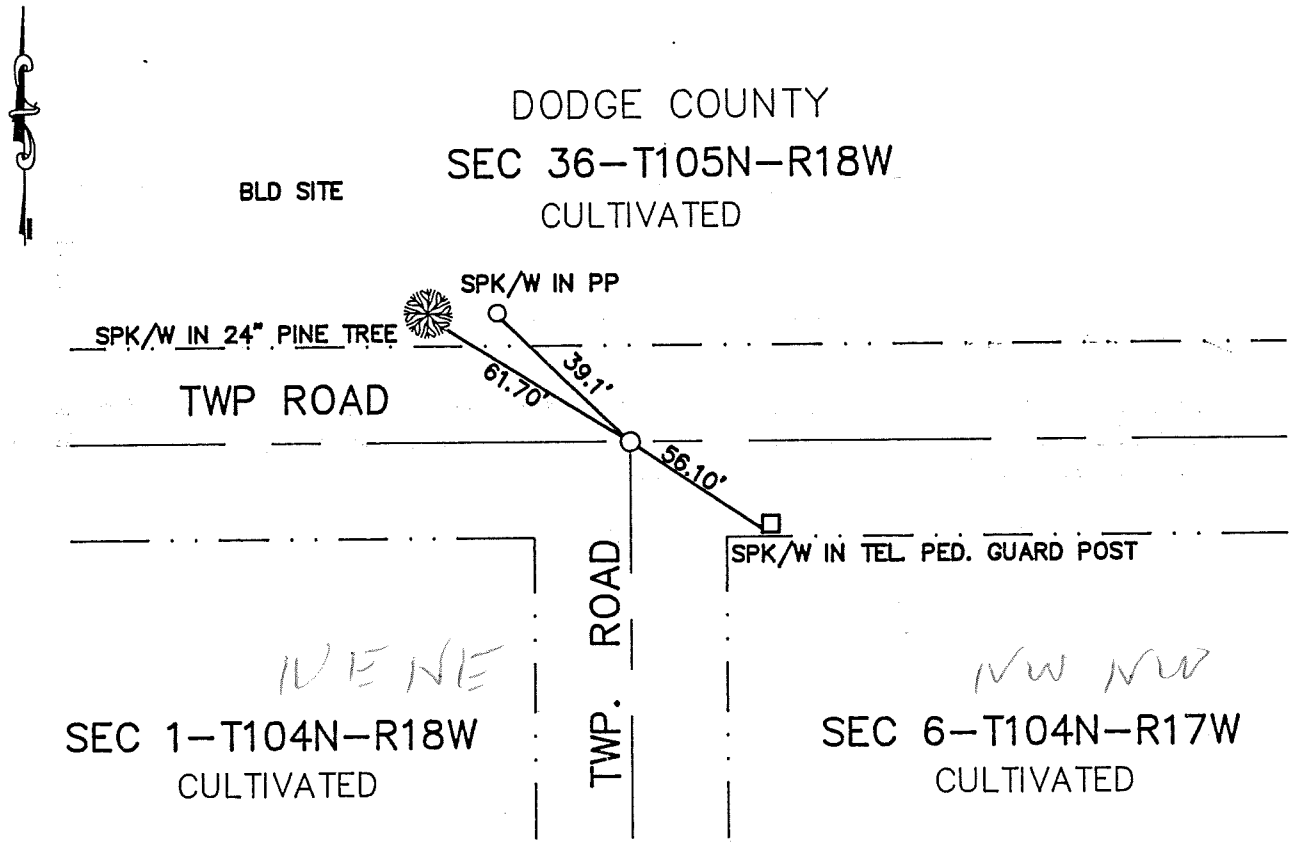


JONES, HAUGH & SMITH INC
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein were prepared by me or under my direct supervision.

[signature] SIGNATURE 1-30-96 DATE

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☒ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of Mower

I hereby certify that this document was filed in the County Rec. office at 3 p .M. on the 2 day of Feb A.D., 1996

COUNTY RECORDER Charles Enger

By Susan M. Davis, Deputy

DOCUMENT NO. 142318

M.H.D. FORM NO. 2105 BOOK 90 PAGE 170 Book 90 Misc Page 170

NW Cor SEC 6-104-17

This corner was originally established by Deputy Surveyor Elisha S. Norris of the U.S. General Land Office in 1853. The government notes show a charred stake was set with mound of earth was built with a trench around.

The following were contacted for section corner information.

Mower County Highway Dept.
Mower County Recorder
Zenk Engineering
Tucker Land Surveying

Book A of the MCHD notes show a concrete monument 1' below the surface.

1993 Jones Haugh and Smith crew, under direction of John Schulte, Mower County Surveyor RLS 13807, dug with county backhoe at the CL of township road E-W and township road South which agreed with the only tie left noted in the MCHD records. We then found a 6"x18" concrete tile monument with an iron in the center at a depth of 2.5'. Left monument as found and placed a cast iron monument above the monument found.

The monument fit occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

For electronic survey data and analysis, contact the firm of Jones, Haugh and Smith Inc.