Index No. _____

# CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

CENTER Corner of Section 4, Township 104N Range 18W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch

☐ On 01/18/1995 (DATE) found a –

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 01/18/1995 (DATE) placed a CAST IRON MONUMENT

SKETCH OF REFERENCE TIES

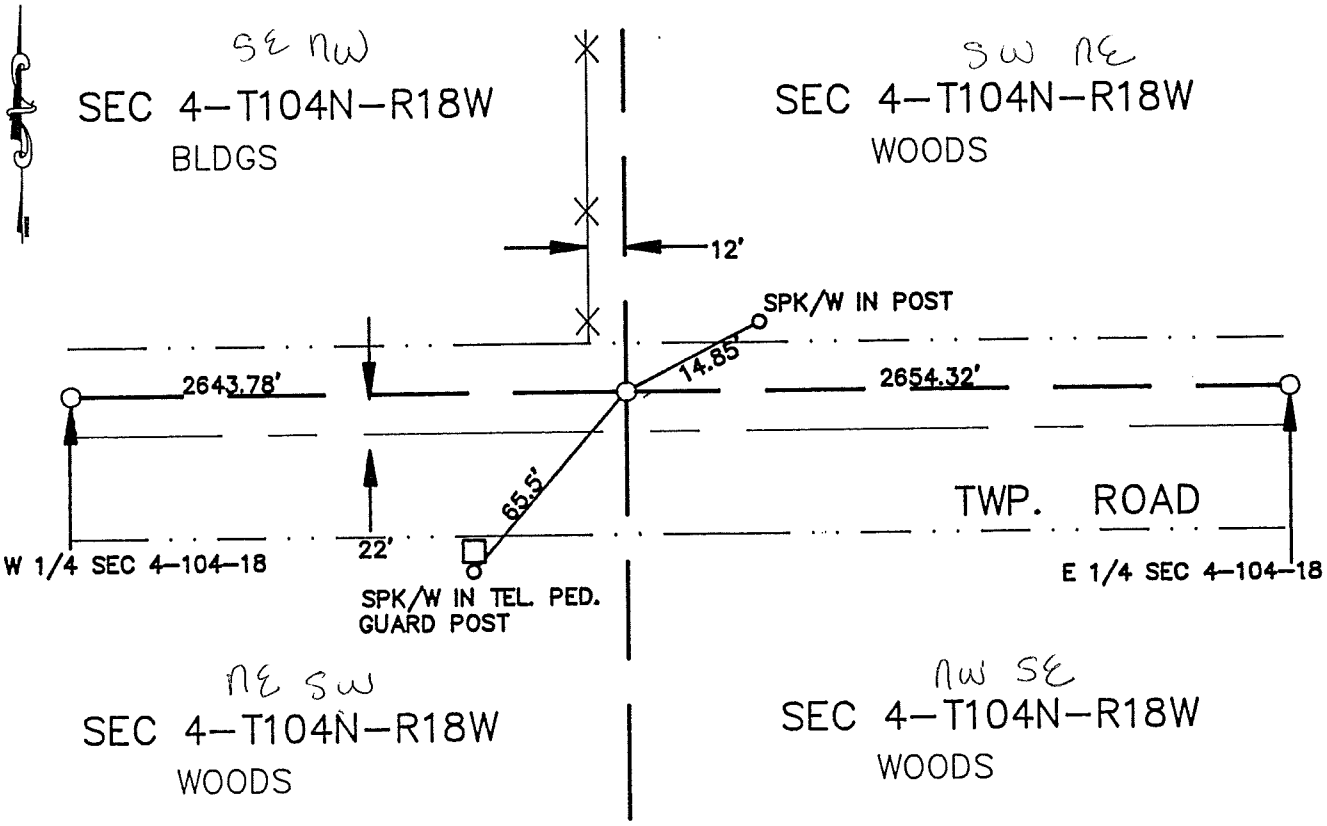


JONES, HAUGH & SMITH INC
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

BOOK 90 PAGE 376

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein were prepared by me or under my direct supervision.

SIGNATURE _____ DATE 3-11-96

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☒ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of Mower

I hereby certify that this document was filed in the County Rec. office at 3 p .M. on the 12 day of Mar A.D., 1996

COUNTY RECORDER Charles Engen
By Susan M. Davis, Deputy
DOCUMENT NO. 443075

M.H.D. FORM NO. 2105

Book 90 Misc Page 376

Center SEC 4-104-18

This corner was originally established by Deputy Surveyor William Anderson of the U.S. General Land Office in 1854. The government notes show nothing was set here at this time.

The following were contacted for section corner information.

Mower County Highway Dept.
Mower County Recorder
Zenk Engineering
Tucker Land Surveying

No record of this corner was obtained from the above mentioned offices.

1995 Jones, Haugh, and Smith crew, under direction of John Schulte, Mower County Surveyor RLS 13807, dug by hand on the CL of township road E-W and in line with line fence North. Found no evidence of original PLS corner. Placed a capped 5/8" iron on the straight lines between the W 1/4 corner and the E 1/4 corner, and between the N 1/4 corner and the S 1/4 corner.

1996 Jones, Haugh, and Smith crew removed cap set in 1995 and set a cast iron monument in place of it. The corner is now retired.

The monument fit occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

For electronic survey data and analysis, contact the firm of Jones, Haugh and Smith Inc.

BOOK 90 PAGE 377