Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

E 1/4 Corner of Section 4, Township 104N Range 18W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch

☐ On 04/08/1981 (DATE) found a PIPE AND FIELD STONE

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 01/28/1995 (DATE) placed a CAST IRON MONUMENT

SKETCH OF REFERENCE TIES

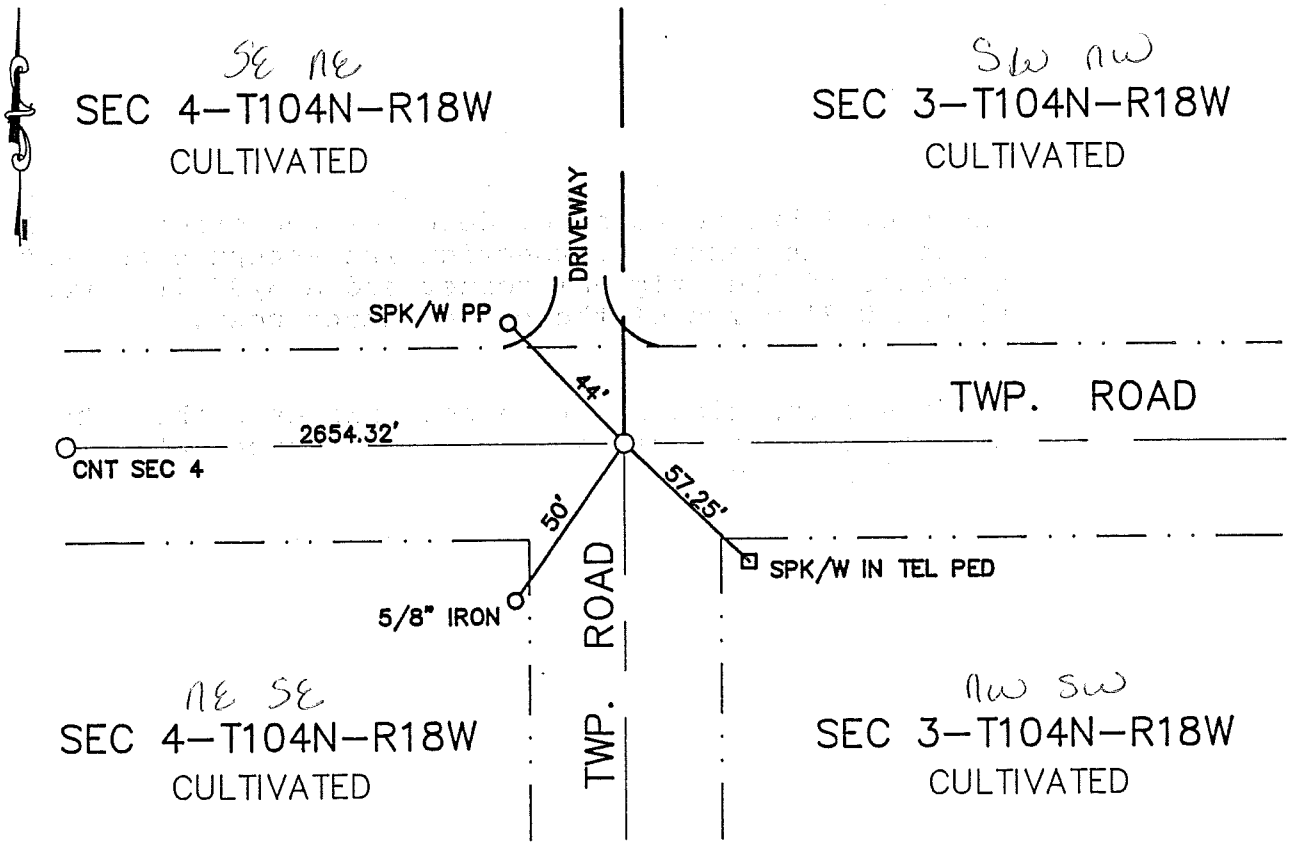

JONES, HAUGH & SMITH INC
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein were prepared by me or under my direct supervision.

SIGNATURE _____ DATE 3-13-96

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☒ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of Mower

I hereby certify that this document was filed in the County Rec. office at 9 a.M. on the 15th day of March A.D., 1996

COUNTY RECORDER Charles Engel
By Meryl A. Taylor, Deputy
DOCUMENT NO. 443132

M.H.D. FORM NO. 2105

BOOK 90 PAGE 417

Book 90 Page 417

E 1/4 Cor SEC 4-104-18

This corner was originally established by Deputy Surveyor William Anderson of the U.S. General Land Office in 1854. The government notes show a wood post was set.

The following were contacted for section corner information.

Mower County Highway Dept.
Mower County Recorder
Zenk Engineering
Tucker Land Surveying

No record of this corner was obtained from the above mentioned offices.

1981 John Schulte, Mower County Surveyor RLS 13807, dug with county backhoe at CL CL twp. roads E-W and South. At a depth of 1.5' uncovered a 1 1/4" pipe. Continued digging and found a field stone. The stone was accepted as best evidence of the original PLS corner and a 5/8" iron was placed on the west side of the stone. A capped 5/8" iron was also placed over the stone 0.7' below the road surface.

1995 Jones Haugh and Smith Crew, under the direction of John Schulte, Mower County Surveyor RLS 13807, found 5/8" iron and placed a cast iron monument over the 5/8".

The monument fits occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

For electronic survey data and analysis, contact the firm of Jones, Haugh and Smith Inc.