Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

NW Corner of Section 6, Township 104N, Range 18W, 5TH P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch:

☒ On 7-17-86 (DATE) found a 8"x8" concrete monument w/ ½" iron in center

☒ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 3-20-91 (DATE) placed a CAST IRON MONUMENT OVER CONCRETE MONUMENT FOUND.

SKETCH OF REFERENCE TIES

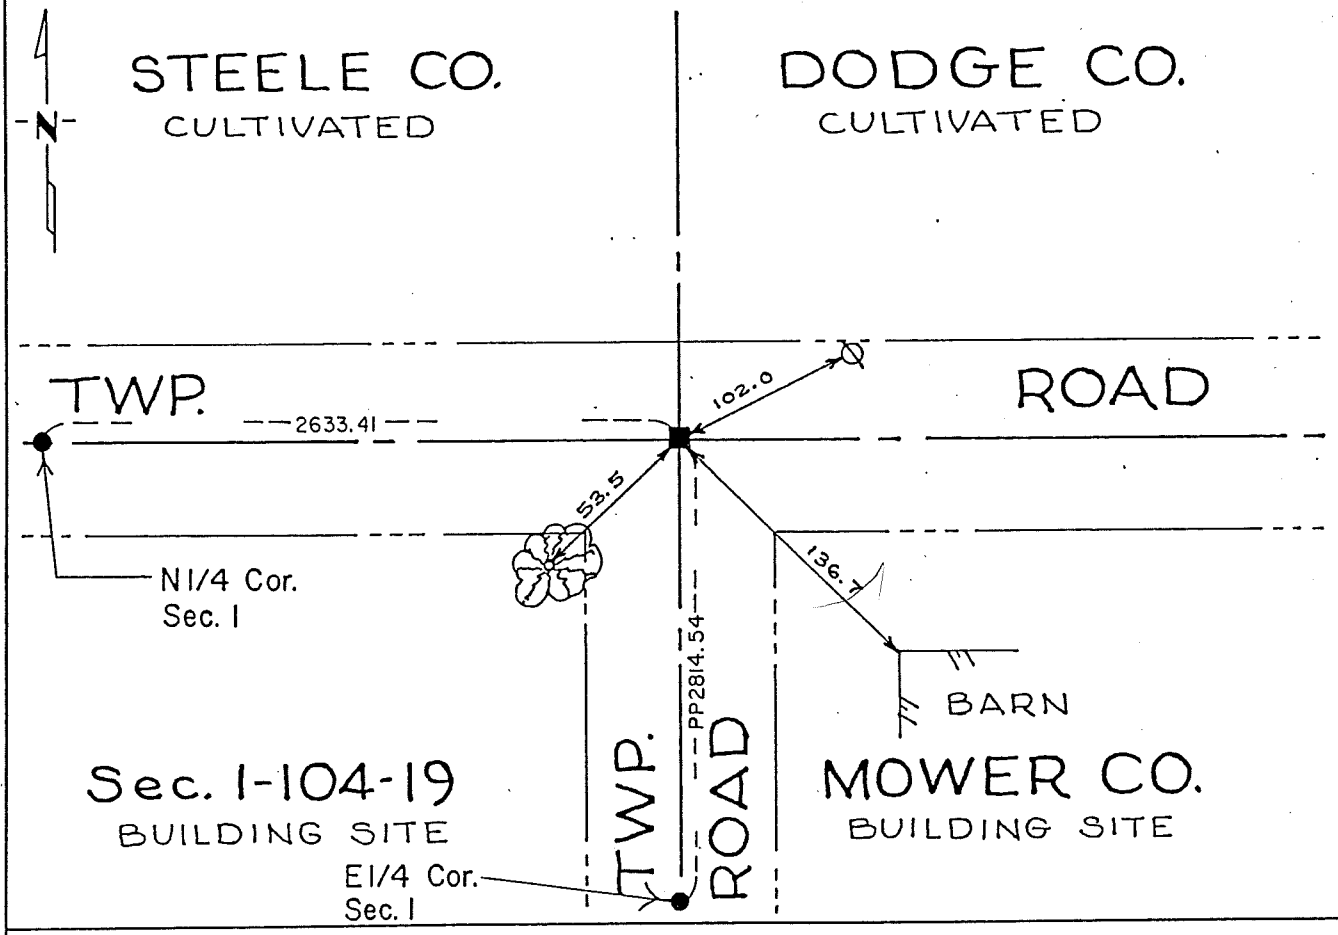

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

SIGNATURE _____ DATE 5-10-93

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☒ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of Mower

I hereby certify that this document was filed in the County Rec. office at 11 A.M. on the 13 day of May A.D., 1993

COUNTY RECORDER Chandra Engan

By Marlene Martin, Deputy

DOCUMENT NO. 420708

Bk 79 Misc Pg. 419

M.H.D. FORM NO. 2105

BOOK 79 PAGE 419

STATEMENT OF EVIDENCE

NW corner Sec 6-104-18

This corner was originally established by Deputy Surveyor J.B. Reyman of the U.S. General Land Office in 1853. The government notes show a wood post was set with a mound of earth and trench. The following ties were taken:

14" Burr Oak	N 75° W	143 links (94.38 ft)
14" Burr Oak	S 26° E	275 links (181.50 ft)

The following were contacted for section corner information:
Freeborn County Engineering Department
Freeborn County Recorder's Office
Mower County Highway Department

1952 Dick Spellman dug and found a concrete monument with a spike in center. The following ties were taken:

Spk & disc in twin Red Oak	71.6' SW
Face REA pole	101.4' ENE
Face Tele pole	106.9' ESE
NW cor grainery	136.9' SSE

1986 Jones, Haugh & Smith Inc crew uncovered a 8"x8" square concrete monument with a 1/2" diameter iron in center.

1991 Jones, Haugh & Smith Inc crew under the direction of John Schulte IV, Freeborn County Surveyor, set a cast iron monument over concrete monument found.

The monument fits occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

BOOK 79 PAGE 420