Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

W1/4 Corner of Section 6, Township 104N, Range 18W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch:

☒ On 7-17-1986 (DATE) found NO EVIDENCE OF THE P.L.S. CORNER.

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☒ On 3-20-1991 (DATE) placed a CAST IRON MONUMENT AT A PROPORTIONAL DISTANCE ON A STRAIGHT LINE BETWEEN THE NE & SE CORNERS OF SECTION 1.

SKETCH OF REFERENCE TIES

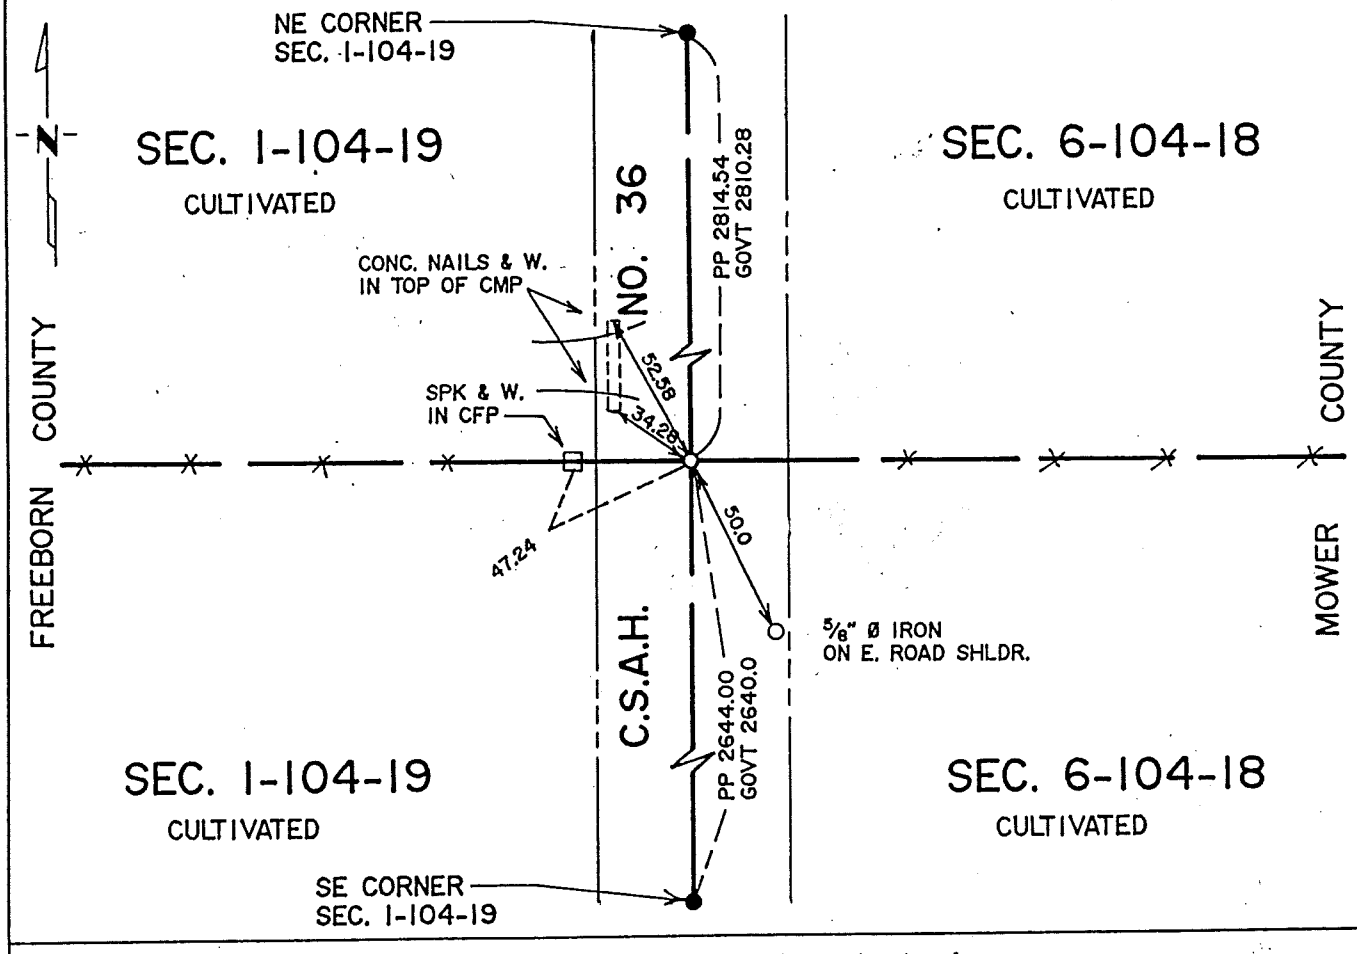

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

[signature] 5-10-93
SIGNATURE DATE

Registration No. 13007

☐ Land Surveyor, ☐ Professional Engineer

☒ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of Mower

I hereby certify that this document was filed in the County Rec. office at 11 A.M. on the 13 day of May A.D., 1993

COUNTY RECORDER Orlando Enge

By Marlene Martin, Deputy

DOCUMENT NO. 420707

Bk 79 Misc, Pg. 417

M.H.D. FORM NO. 2105

BOOK 79 PAGE 417 BOOK 79 PAGE 417

STATEMENT OF EVIDENCE

W 1/4 corner Sec 6-104-18

This corner was originally established by Deputy Surveyor J.B. Reyman of the U.S. General Land Office in 1854. The government notes show a wood post was set with a mound of earth and trench. The following ties were taken:

6" Burr Oak	S 22° E	216 links (142.56 ft)
6" Burr Oak	S 74° W	400 links (264.0 ft)

The following were contacted for section corner information:
Freeborn County Engineering Department
Freeborn County Recorder's Office
Mower County Highway Department

1986 Jones, Haugh & Smith Inc crew under the direction of John Schulte IV, Freeborn County Surveyor, dug with the County backhoe on centerline centerline of north-south road in line with east-west fence and found no evidence of the public land survey corner.

1991 Jones, Haugh & Smith Inc crew under the direction of John Schulte IV, Freeborn County Surveyor, set a cast iron monument at a proportional distance on line between the northeast and southeast section corners and measured a distance of 2644.0 feet south to the southeast corner versus 2640.0 feet government; and measured a distance of 2814.54 feet north to the northeast corner versus 2810.28 feet government.

The monument fits occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

For electronic survey data and analysis contact the firm of Jones, Haugh & Smith Inc.

BOOK 79 PAGE 418