Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

SW Corner of Section 7, Township 104N, Range 18W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch:

☐ On 8-4-86 (DATE) found a 3/4"Ø IRON OVER 1"Ø PIPE IN WOOD POST BY FIELD STONE 2.5' DEEP.

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 8-4-86 (DATE) placed a CAST IRON MONUMENT OVER PIPE FOUND.

SKETCH OF REFERENCE TIES

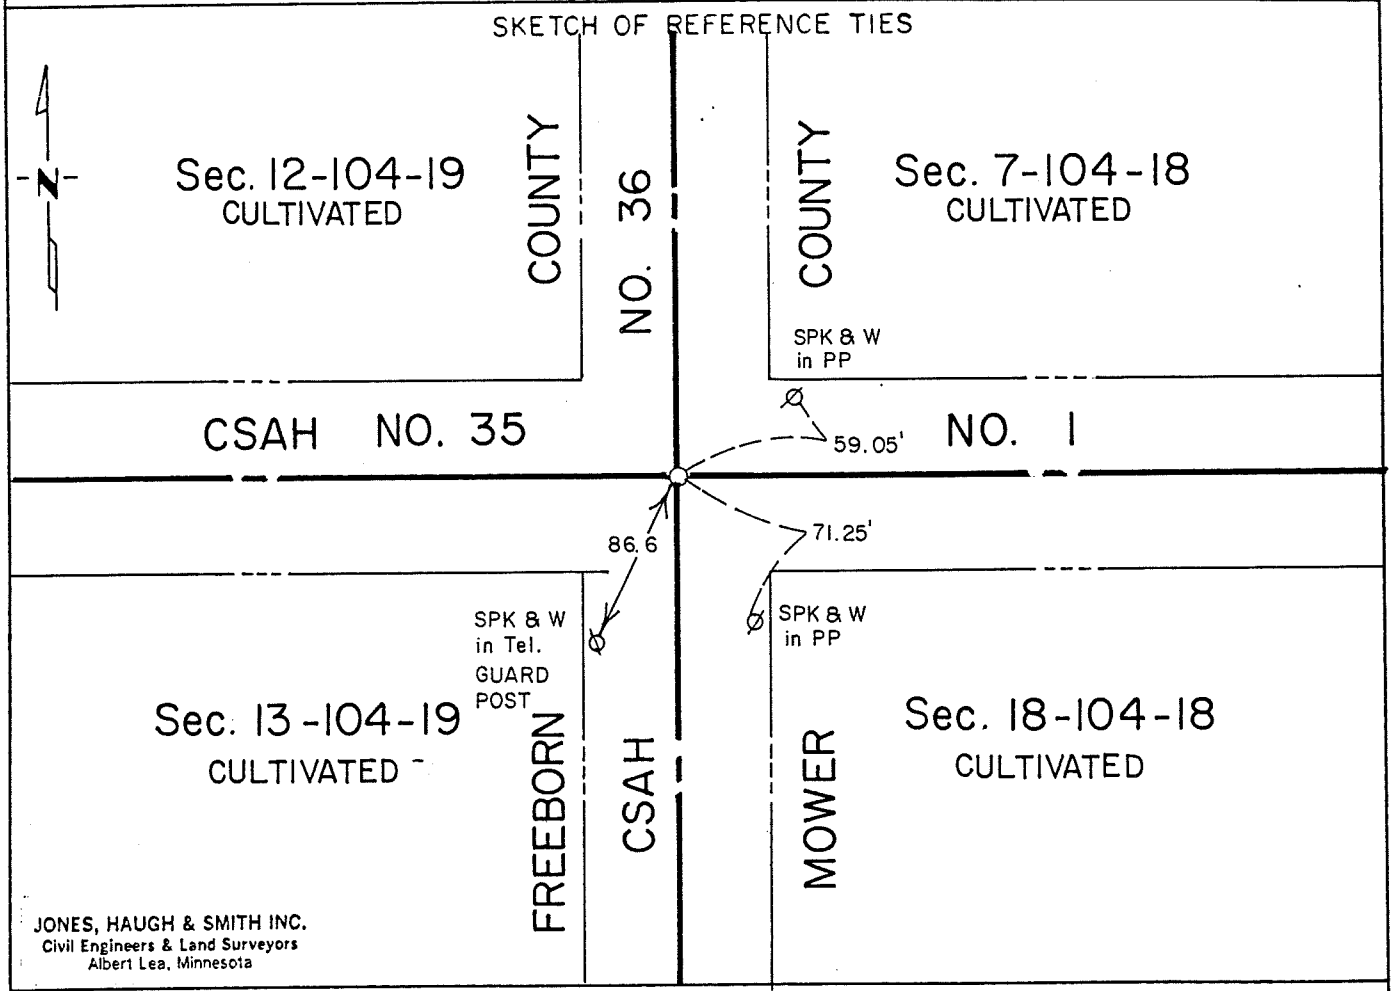

JONES, HAUGH & SMITH INC.
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

SIGNATURE _____ DATE 10-11-91

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☑ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER

County of _____

I hereby certify that this document was filed in the County Rec. office at _____ .M. on the _____ day of _____ A.D., 19__

COUNTY RECORDER _____

By _____, Deputy

DOCUMENT NO. _____

M.H.D. FORM NO. 2105

STATEMENT OF EVIDENCE

SW cor Sec 7-104-18

This corner was originally established by Deputy Surveyor J.B. Reyman of the U.S. General Land Office in 1854. The government notes show a wood post and a charred stake was set with a mound of earth and trench.

The following were contacted for section corner information:
Freeborn County Engineering Department
Freeborn County Recorder's Office
Mower County Engineering Department

1941 John Nielsen, County Surveyor, uncovered corner and the following ties were taken:
PP 47.6' NE
TP 108.0' SW
PP 70.8' SE

1962 George Murphy, County employee, located corner. The following ties were taken:
Spk in PP 59.5' NE
Spk in Tp 108.0' SW
Spk in PP 70.8' SE

1986 Jones, Haugh & Smith Inc crew under the direction of John Schulte IV, Freeborn County Surveyor, dug with the County backhoe on centerline centerline of north-south-east-west roads. Found a 3/4" diameter iron on surface over a 1" diameter pipe in a wood post on the east side of a pointed field stone 2.5 feet deep. Set a cast iron monument over pipe found.

The monument fits occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.