Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

NW Corner of Section 12, Township 104N Range 18W, 5TH P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch

☐ On 9-3-93 (DATE) found a 12"x12"x18" POINTED STONE-4FT. BELOW SURFACE

☒ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 9-3-93 (DATE) placed a CAST IRON MONUMENT ABOVE STONE

SKETCH OF REFERENCE TIES

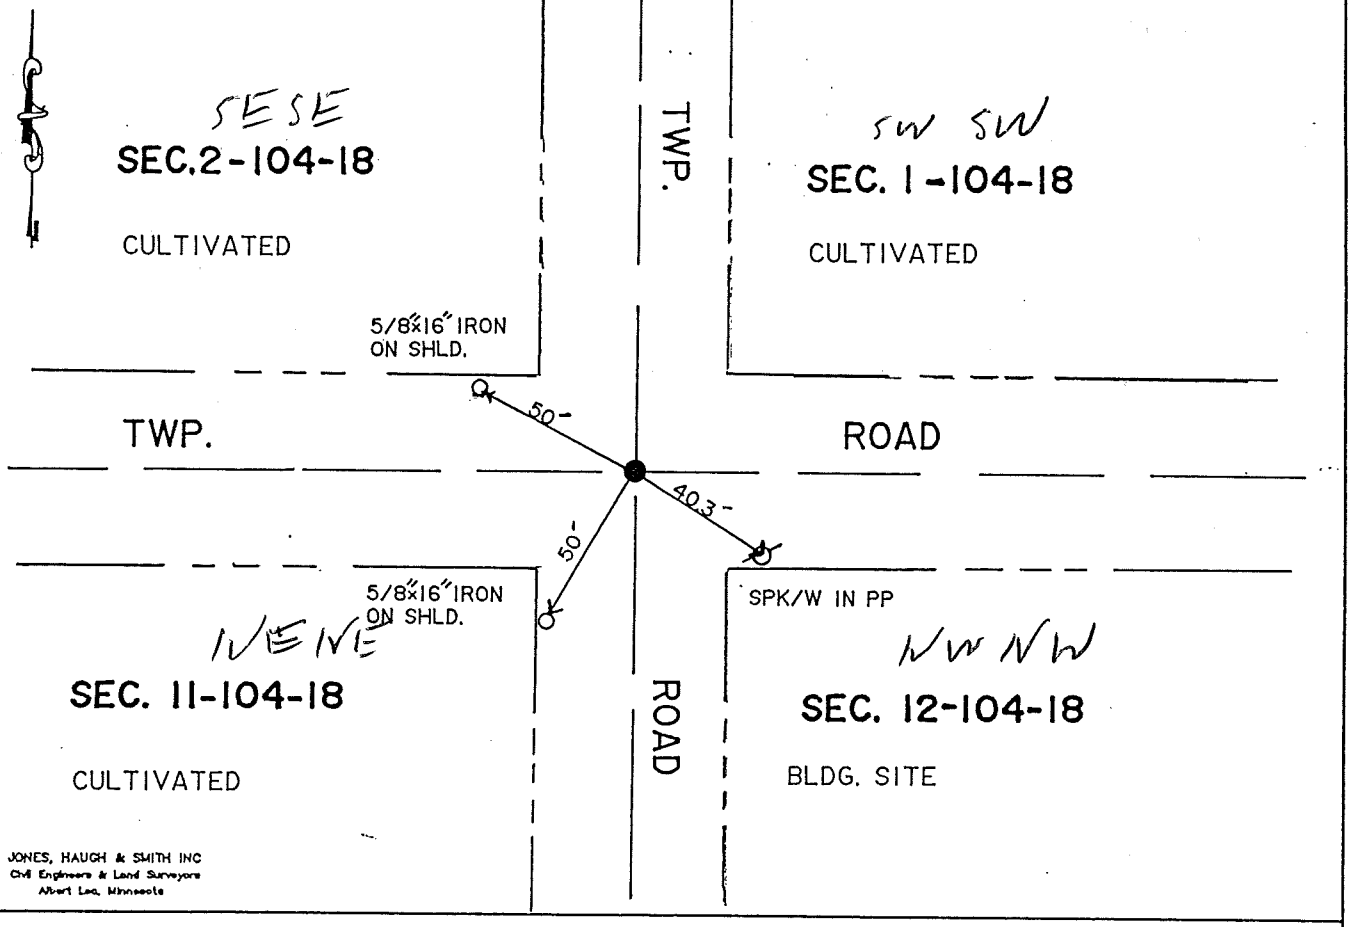

JONES, HAUGH & SMITH INC
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein were prepared by me or under my direct supervision.

SIGNATURE _____ DATE 7-7-94

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☑ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of Mower

I hereby certify that this document was filed in the County Rec. office at 11 A.M. on the 11 day of July A.D., 1994

COUNTY RECORDER Charles Engen

By Marlene Martin, Deputy

DOCUMENT NO. 430570

M.H.D. FORM NO. 2105

BOOK 84 PAGE 9 Book 84 Misc Pg 9

STATEMENT OF EVIDENCE

NW cor 12-104-18

This corner was originally established by Deputy Surveyor William I. Anderson of the U.S. General Land Office in 1854. The government notes show this corner was marked with a wood post.

16" Burr Oak	S 47° W	30 links
8" Burr Oak	S 38° E	260 links

The following were contacted for section corner information:
Mower County Engineering Department
Minnesota Department of Transportation

No information on the corner was obtained from Mower County or Minnesota Department of Transportation.

1993 Jones, Haugh & Smith Inc personnel under the direction of John H. Schulte IV, RLS 13807, excavated with a backhoe a 4'x12'x5' deep hole on centerline centerline of township roads. Found a 12"x12"x18" pointed field stone at a depth of four feet and resting in virgin soil. Dug around stone and found no other evidence. Left stone as found and set a capped 5/8" diameter x 18" iron on north side of stone and a cast iron monument near road surface above stone found.

The monument fits occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.