Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

N 1/4 Corner of Section 12, Township 104N Range 18W, 5TH P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch:

☐ On 9-3-93 (DATE) found a 4"X 24" WOOD STAKE 1' FOOT BELOW ROAD SURFACE

☒ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 9-3-93 (DATE) placed a CAPPED 5/8ø ON CNT. OF STAKE
SET CIM OVER 5/8ø & WOOD STAKE

SKETCH OF REFERENCE TIES

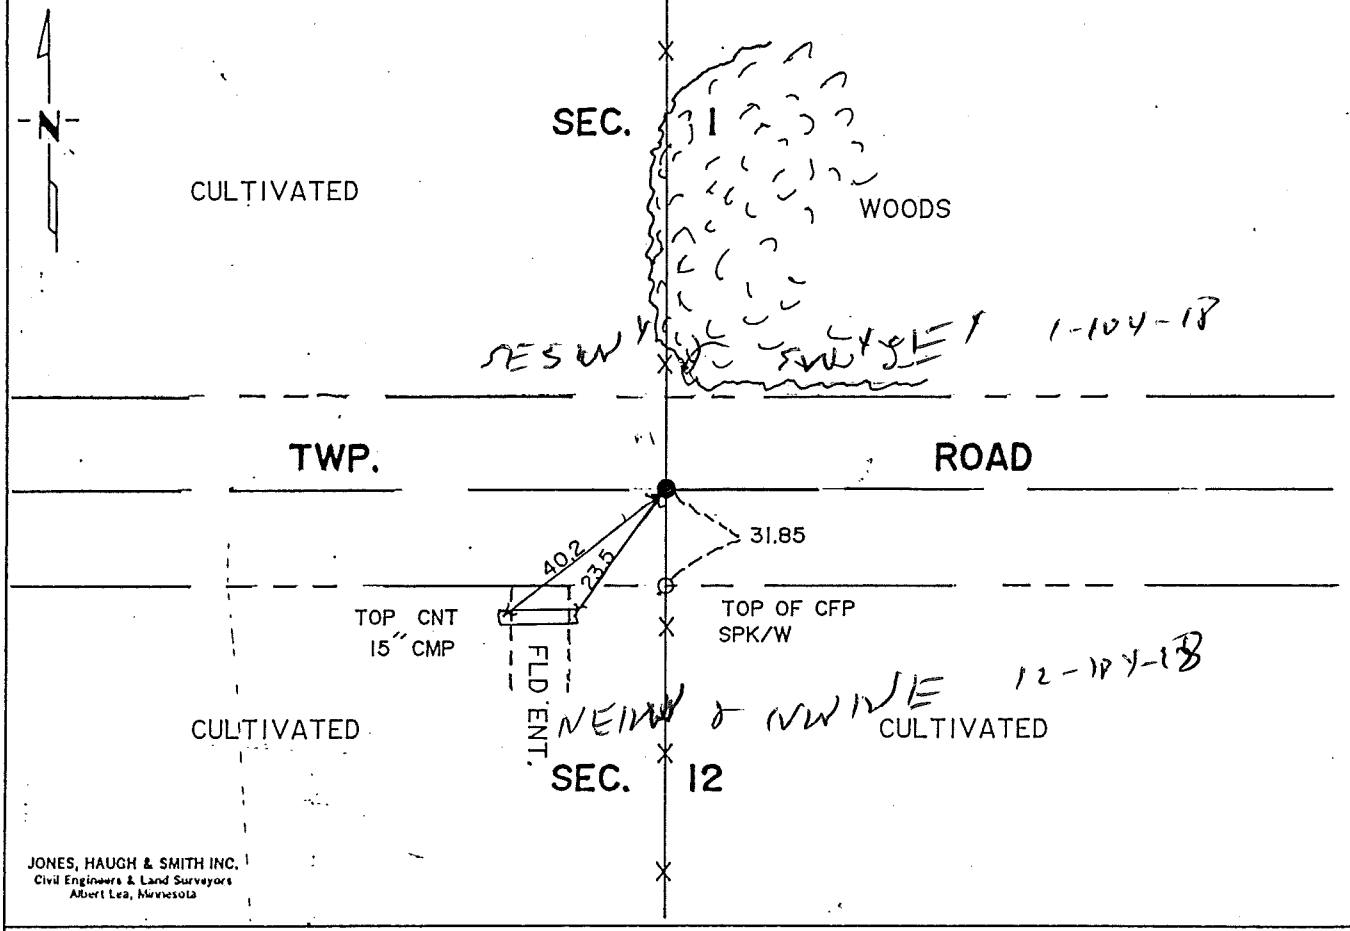

JONES, HAUGH & SMITH INC.
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

SIGNATURE _____ DATE 7-7-94

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☑ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of Mower

I hereby certify that this document was filed in the County Rec. office at 11 A.M. on the 11 day of July A.D., 1994

COUNTY RECORDER Charles Engel

By Marlene Martin, Deputy

DOCUMENT NO. 430569
Book 84 Misc Pg 7

LAND FORM NO. 2105 BOOK 84 PAGE 7

STATEMENT OF EVIDENCE

N 1/4 cor 12-104-18

This corner was originally established by Deputy Surveyor William I. Anderson of the U.S. General Land Office in 1854. The government notes show this corner was marked with a wood post and a trench with a mound of earth.

10" Burr Oak N 73° E

The following were contacted for section corner information:
Mower County Engineering Department
Minnesota Department of Transportation

No information on the corner was obtained from Mower County or Minnesota Department of Transportation.

1993 Jones, Haugh & Smith Inc personnel under the direction of John H. Schulte IV, RLS 13807, excavated with a backhoe a 3'x8'x3' deep hole on centerline of east-west township road and in line with south fence and edge of woods north. Found a 4" diameter x 24" wood stake at one foot. Continued digging and uncovered pieces of clay tile one foot below wood stake found. Dug into virgin soil and found no other evidence. Left monuments as found and set a capped 5/8" diameter x 18" iron in center of stake found and set cast iron monument near road surface above stake.

The monument fits occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.