Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

W 1/4 Corner of Section 18, Township 104 Range 17, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch

☐ On 07/13/1995 (DATE) found a CAST IRON BOLTED TO 2"X2" TUBING

☒ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 07/13/1995 (DATE) placed a CAST IRON MONUMENT ON WEST SIDE OF ROCK

SKETCH OF REFERENCE TIES

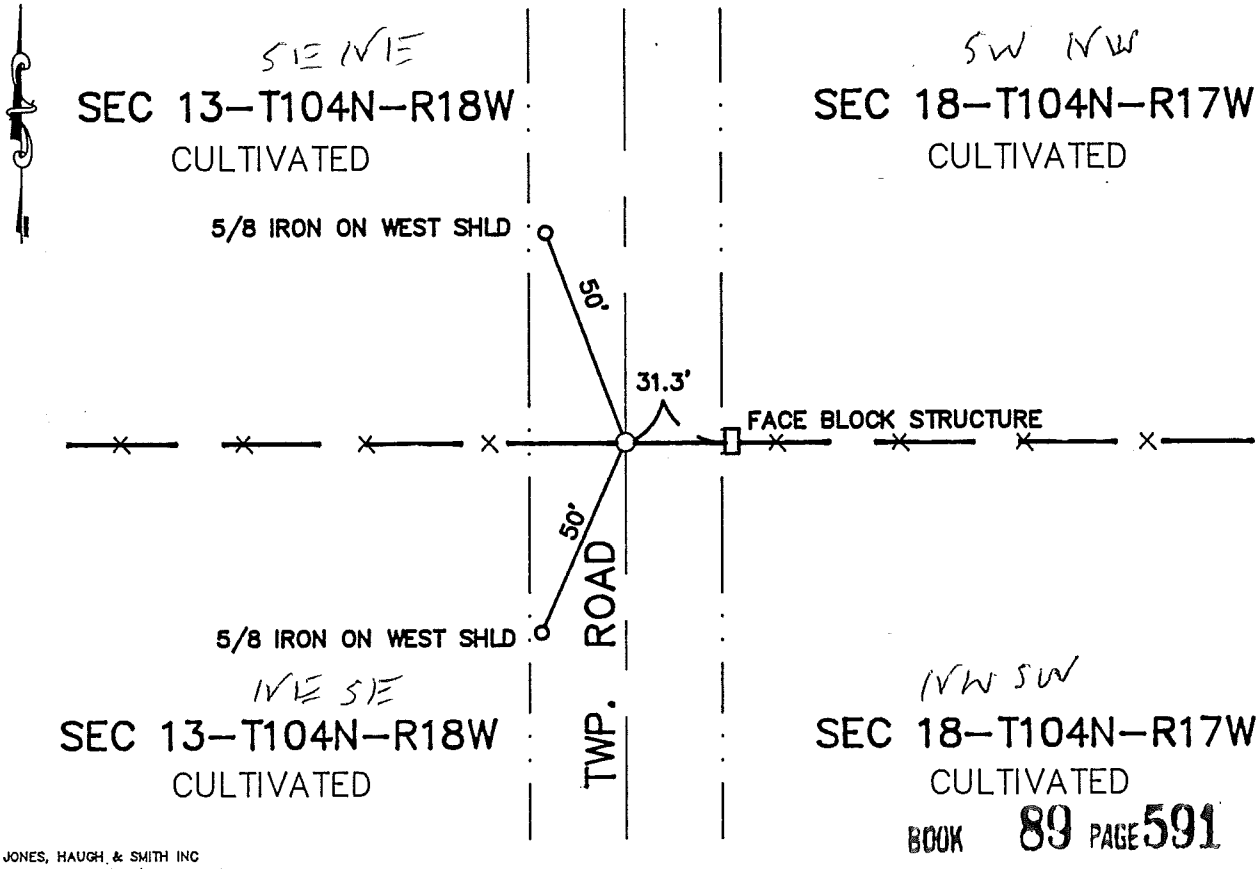

JONES, HAUGH & SMITH INC
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein were prepared by me or under my direct supervision.

SIGNATURE _____ DATE 12-27-95

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☒ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of Mower

I hereby certify that this document was filed in the County Rec. office at 2 P.M. on the 4 day of Jan A.D., 1996

COUNTY RECORDER Charles Enger

By Susan M. Davis, Deputy

DOCUMENT NO. 441759

M.H.D. FORM NO. 2105

Book 89 Misc Page 591

W 1/4 Cor SEC 18-104-17

This corner was originally established by Deputy Surveyor John Fitzpatrick of the U.S. General Land Office in 1853. The government notes show a wood post was set with a mound of earth and trench.

The following were contacted for section corner information.

Mower County Highway Dept.
Mower County Recorder
Zenk Engineering
Tucker Land Surveying

No record of this corner was obtained from the above mentioned offices.

1995 Jones, Haugh and Smith crew, under direction of John Schulte, Mower County Surveyor RLS 13807, dug with county backhoe at the CL of road N-S and fence E-W. Found a cast iron monument bolted to a 2"x2" square tubing 3' long. Continued digging and found a 2'x1' stone. Cast iron monument was set on the West side of the stone. Dug to virgin soil and found no other evidence. Accepted monument as true corner. Left monument as found 6" +- below the road surface.

The monument fit occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

For electronic survey data and analysis, contact the firm of Jones, Haugh and Smith Inc.

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

E1/4 Corner of Section 13 Township 104 Range 18W 5th P.M.

STATE OF MINNESOTA. County of MOWER


At the corner location shown on the sketch:

☒ On 4-19-1995 (DATE) found a 24"LONG GRANITE STONE WITH A 6"X6" SHAPED TOP

____ left monument as found ____ lowered monument X removed monument

☒ On 4-19-1995 (DATE) placed a 24" TELSPAR WITH CAST IRON CAP AT SAME LOCATION AS FOUND STONE

SKETCH OF REFERENCE TIES

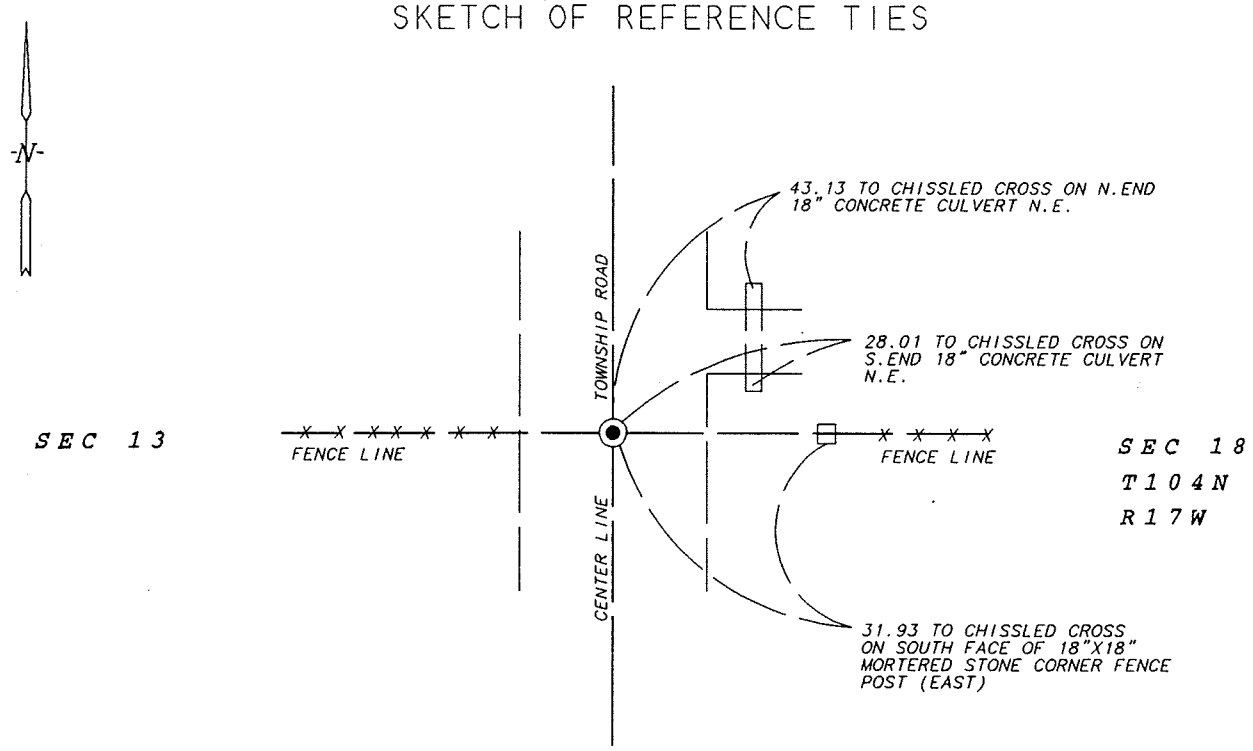

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

Vincent A. Fangman
Licensed Land Surveyor
Minnesota Registration No. 14888

4/19/1995
Date.

FANGMAN LAND SURVEYING Pine Islands MINNESOTA

OFFICE OF THE COUNTY RECORDER
County of MOWER

I herby certify that this document was filed in Co. Recorder's office at _____ .M. on the _____ day of _____ A.D. 19

County Recorder _____

By _____ .Deputy

DOCUMENT NO. _____

Statement of Evidence:

East Quarter Corner Section 13, T104N, R18W

April 19, 1995 Vince Fangman, private land surveyor, dug with backhoe at the center of the north-south road and in line with fences east and west. A large granite stone was found 2 feet below the road surface. The stone was layed on its side and moved slightly southeast of its true position to make room for the permanent metal monument. The distance to the northeast corner is 2651.98 and the distance to the occupation at the southeast corner of section 13 is approximately 2655. This corner is being accepted as the public land survey corner.