Index No. P 76 "E"

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

E1/4 Corner of Section 14, Township 104N, Range 18W, 5TH P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch:

☒ On 12-8-88 (DATE) found a 3/8" dia. iron in a 6" dia. concrete monument

☒ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☒ On 12-8-88 (DATE) placed a 5/8"ϕ x 16" iron capped RLS 13807 on south side of concrete monument

SKETCH OF REFERENCE TIES

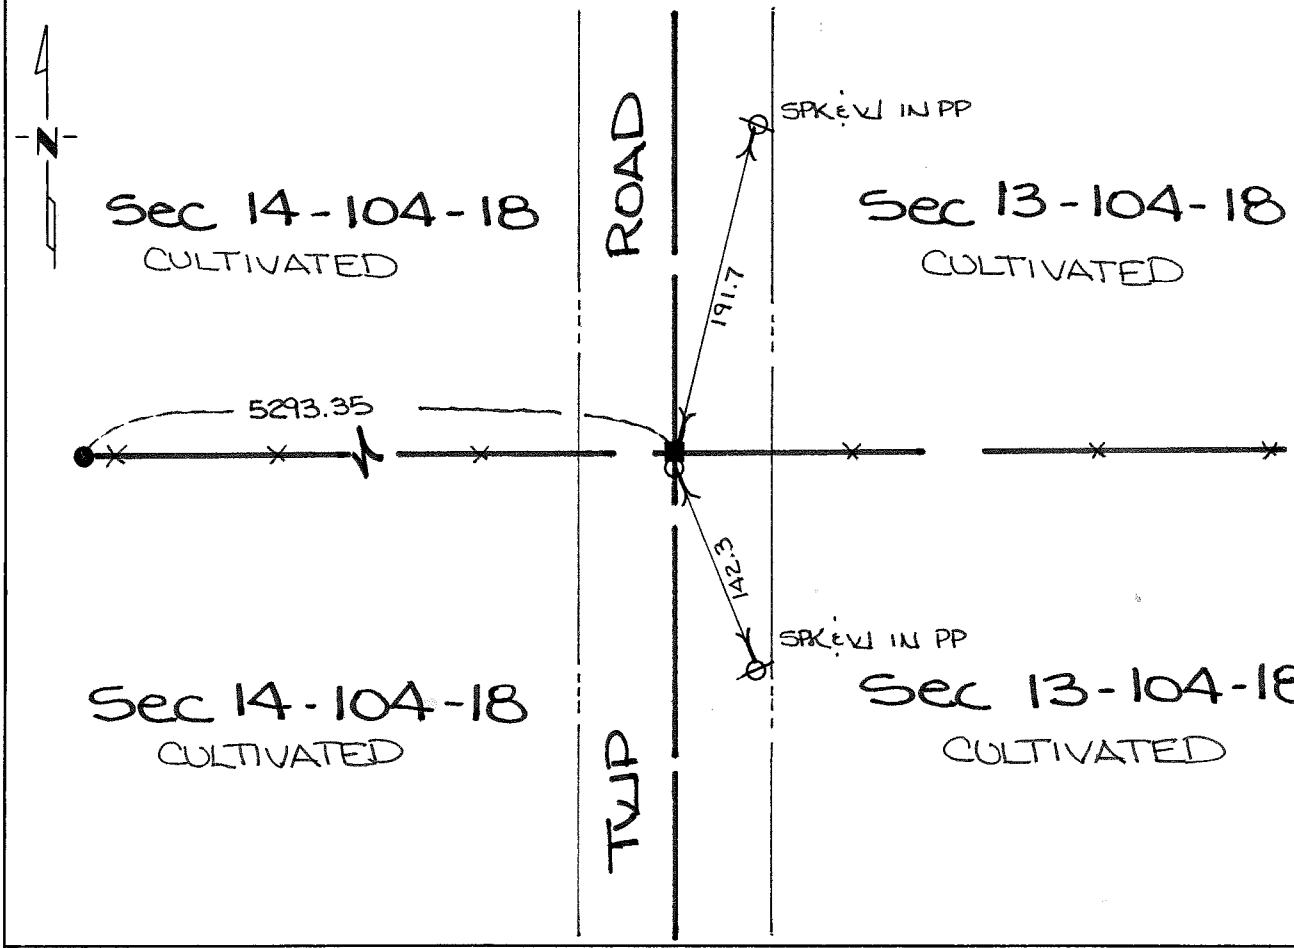

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

SIGNATURE 12-12-88 DATE

Registration No. 13807

☑ Land Surveyor, ☐ Professional Engineer

☐ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER

County of _____

I hereby certify that this document was filed in the County Rec. office at _____ .M. on the _____ day of _____ A.D., 19__

COUNTY RECORDER _____

By _____, Deputy

DOCUMENT NO. _____

M.H.D. FORM NO. 2105

STATEMENT OF EVIDENCE
E¼ corner Section 14-104-18

1854 William I. Anderson, Deputy Surveyor of the US General Land Office set a wood post and took ties to the following bearing trees:

11" Burr Oak	S 02° 3/4 E	384 Links
12" Burr Oak	S 06° 3/4 W	295 Links

No further evidence was obtained from County or private records of ¼ corner.

1988 Jones, Haugh & Smith crew uncovered a 6" diameter concrete monument in clay tile with a 3/8" diameter iron cast in center of monument on centerline of north-south road and in line with fence east-west.

The monument found fits occupation and road centerlines within the section and has been accepted as best evidence of a perpetuation of the original public land survey corner.

For electronic survey data and analysis, contact firm of Jones, Haugh & Smith