Index No. P 76 "C"

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

NE Corner of Section 14, Township 104N Range 18W, 5TH P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch:

☐ On 10-9-92 (DATE) found a 6"ø CONCRETE MONUMENT WITH ½"ø IRON CAST IN CENTER

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 10-9-92 (DATE) placed a CAST IRON MONUMENT

SKETCH OF REFERENCE TIES

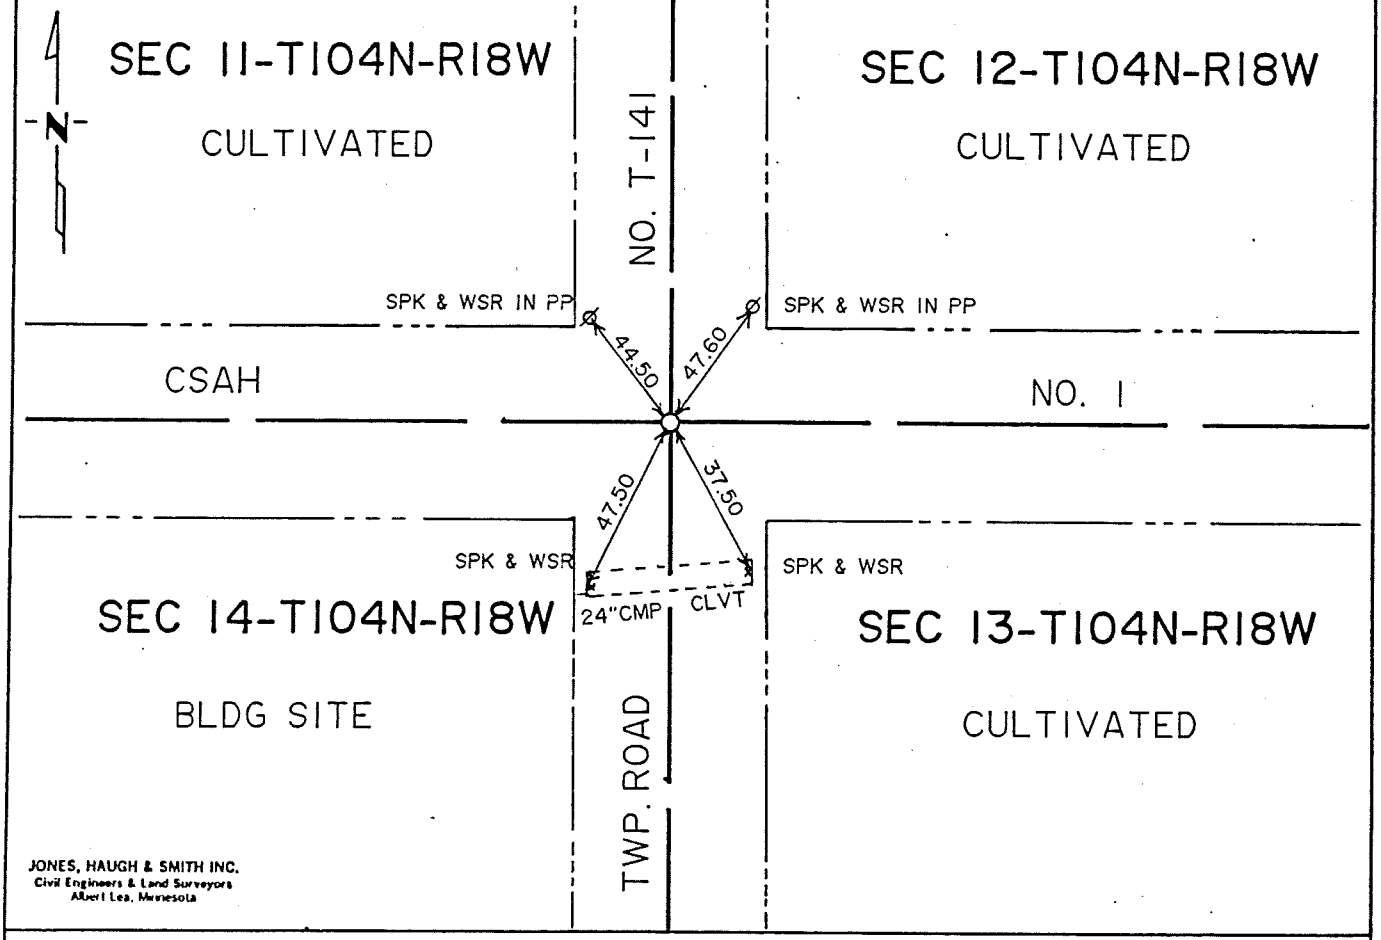

JONES, HAUGH & SMITH INC.
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

SIGNATURE 11-12-92 DATE

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☑ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of _____

I hereby certify that this document was filed in the County Rec. office at _____ .M. on the _____ day of _____ A.D., 19___

COUNTY RECORDER _____

By _____, Deputy

DOCUMENT NO. _____

M.H.D. FORM NO. 2105

STATEMENT OF EVIDENCE

NE corner Section 14-104-18

This corner was originally established by Deputy Surveyor William I. Anderson of the U.S. General Land Office in 1853. The government notes show a wood post was set with a mound of earth and trench. The following tie was taken:

8" Burr Oak	S 59 1/2° W	247 links (163.02 ft)

The following were contacted for section corner information:

Mower County Highway Department
Mower County Recorder
Zenk Engineering
Tucker Land Surveying

1941 Recorded in Book 'A' in the office of the Mower County Engineer, a monument was uncovered and the following ties were taken:

N to REA pole	30.6 ft
SW to Maple	57.7 ft
N to fence west	36.5 ft
NE to PP	47.2 ft
NW to CFP	44.0 ft
NW to guy pole	44.0 ft
W to fence line	24.8 ft

1992 Jones, Haugh & Smith Inc crew, under the direction of John H. Schulte, dug with the county backhoe and uncovered a 1/2" diameter iron cast in center of 6" diameter concrete monument three feet below road surface in virgin soil. Tie to the face of power poles NW and NE agree with 1941 records. Set cast iron monument over concrete monument on road surface.

The monument fits occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public
land survey corner.