16 "F"

Index No. 9

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

W 1/4 Corner of Section 14, Township 104N, Range 18W, 5TH P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch:

☐ On 12-8-88 (DATE) found a NO EVIDENCE OF CORNER

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 12-8-88 (DATE) placed a 5/8"Ø IRON CAPPED RLS 13807

SKETCH OF REFERENCE TIES

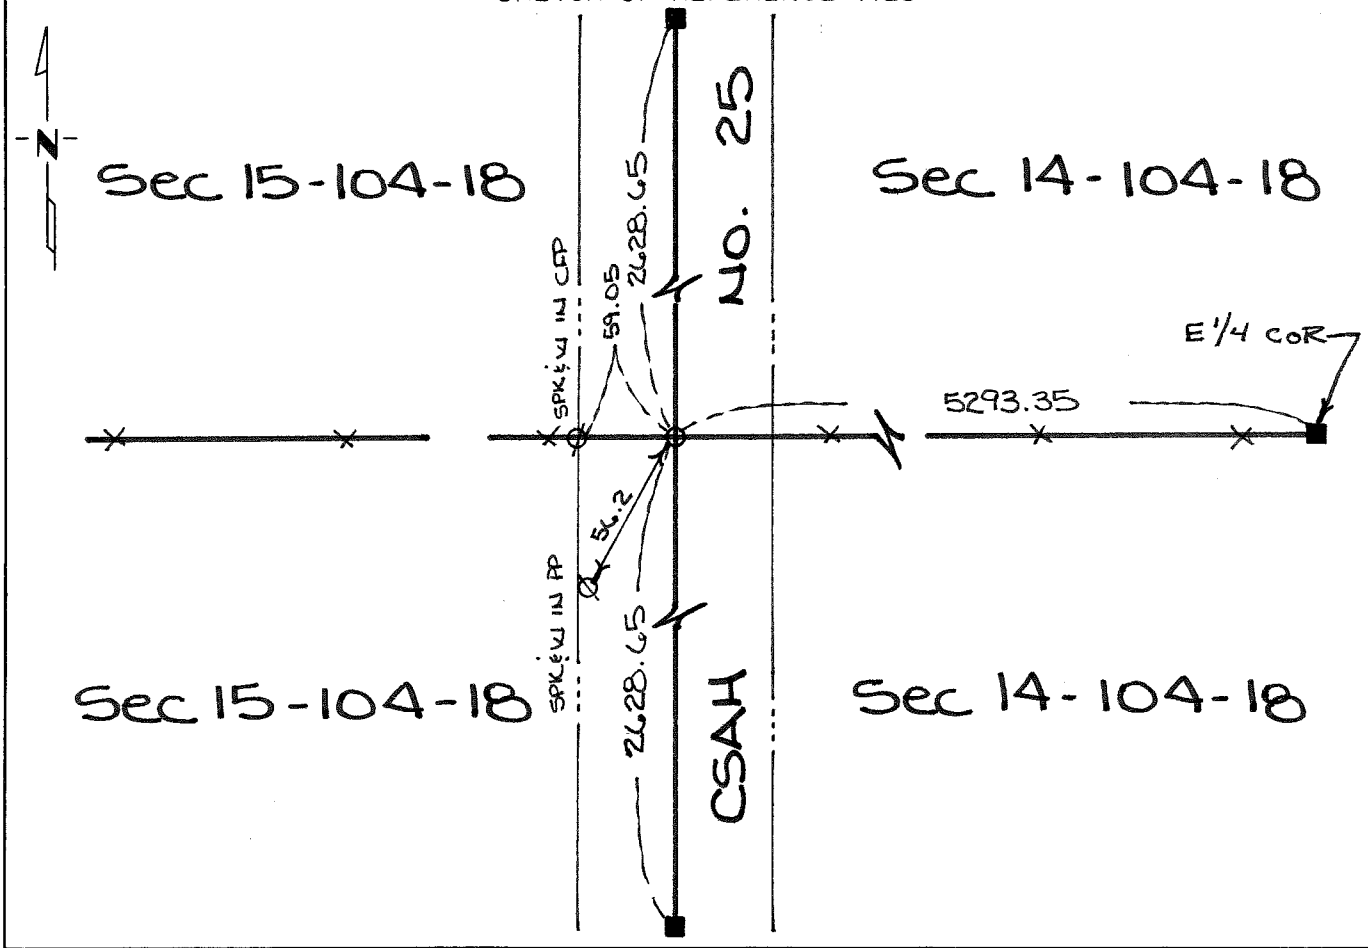

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

SIGNATURE 12-12-88 DATE

Registration No. 13807

☒ Land Surveyor, ☐ Professional Engineer

☐ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER

County of _____

I hereby certify that this document was filed in the County Rec. office at _____ .M. on the _____ day of _____ A.D., 19__

COUNTY RECORDER _____

By _____, Deputy

DOCUMENT NO. _____

M.H.D. FORM NO. 2105

STATEMENT OF EVIDENCE
W¼ corner Section 14-104-18

1854 William I. Anderson, Deputy Surveyor of the US General Land Office set a wood post and took ties to the following bearing trees:

6" Burr Oak S 20° W 68 Links
13" Burr Oak 307 Links North

1935± Mower County Engineering Department indicates no monument was uncovered during 1935 grading project, at the time of the grading project there was a township road on the assumed ¼ line going west from ¼ corner. Distance from northwest corner to centerline township road was 2628.5 feet.

1950± Mower County Engineering Department regraded county road and shows no evidence of ¼ corner and at this time township road to the west has been removed.

1988 Jones, Haugh & Smith crew found no evidence of public land survey corner or a perpetuation thereof. Therefore established position of ¼ corner using obliterated methods setting a 5/8" diameter iron on a straight line at the midpoint between the northwest corner and southwest corners of Section 14-104-18.

The monument set fits occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

For electronic survey data and analysis, contact firm of Jones, Haugh & Smith