Index No. P 76"8"

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

NW Corner of Section 14, Township 104N, Range 18W, 5TH P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch:

☒ On 12-8-88 (DATE) found a 1/2" dia. iron in a concrete monument

☒ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On _____ (DATE) placed a _____

SKETCH OF REFERENCE TIES

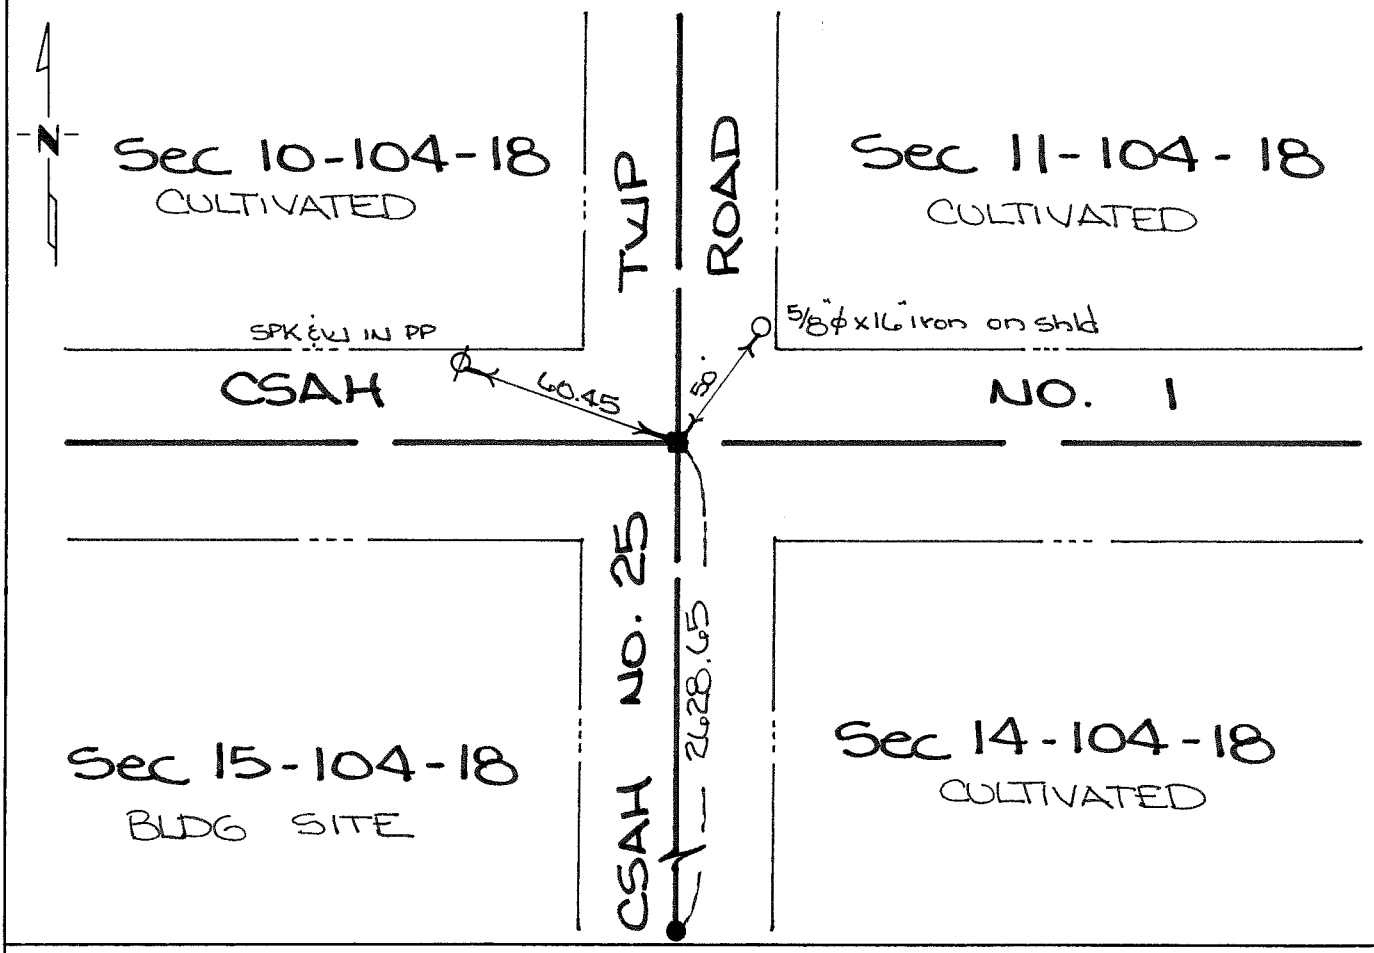

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

SIGNATURE _____ DATE 12-12-88

Registration No. 13807

☒ Land Surveyor, ☐ Professional Engineer

☐ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER

County of _____

I hereby certify that this document was filed in the County Rec. office at _____ .M. on the ____ day of _____ A.D., 19__

COUNTY RECORDER _____

By _____, Deputy

DOCUMENT NO. _____

M.H.D. FORM NO. 2105

STATEMENT OF EVIDENCE
NW corner Section 14-104-18

1854 William I. Anderson deputy surveyor of the US General Land Office set a wood post and ties were taken to the following bearing trees:

7" Burr Oak	S 63° E	290 Links
8" Burr Oak	S 80° W	466 Links

1935± Mower County Engineering Department grading plan shows a concrete monument inplace and ties were taken and recorded in the tie book.

1950± Mower County Engineering Department grading plan shows a concrete monument inplace, no new ties were taken.

1988 Jones, Haugh & Smith crew uncovered a 6" diameter concrete monument in clay tile with ½" diameter iron cast in center of monument.

The monument found fits occupation and road centerlines and agrees with records from the Mower County Engineering Department and has been accepted as a perpetuation of the original public land survey corner.

For electronic survey data and analysis, contact firm of Jones, Haugh & Smith