Index No. P8V #W'

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

S 1/4 Corner of Section 9, Township 104N, Range 18W, 5TH P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch:

☐ On _____ (DATE) found a _____

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 9-22-86 (DATE) placed a cast iron monument

SKETCH OF REFERENCE TIES

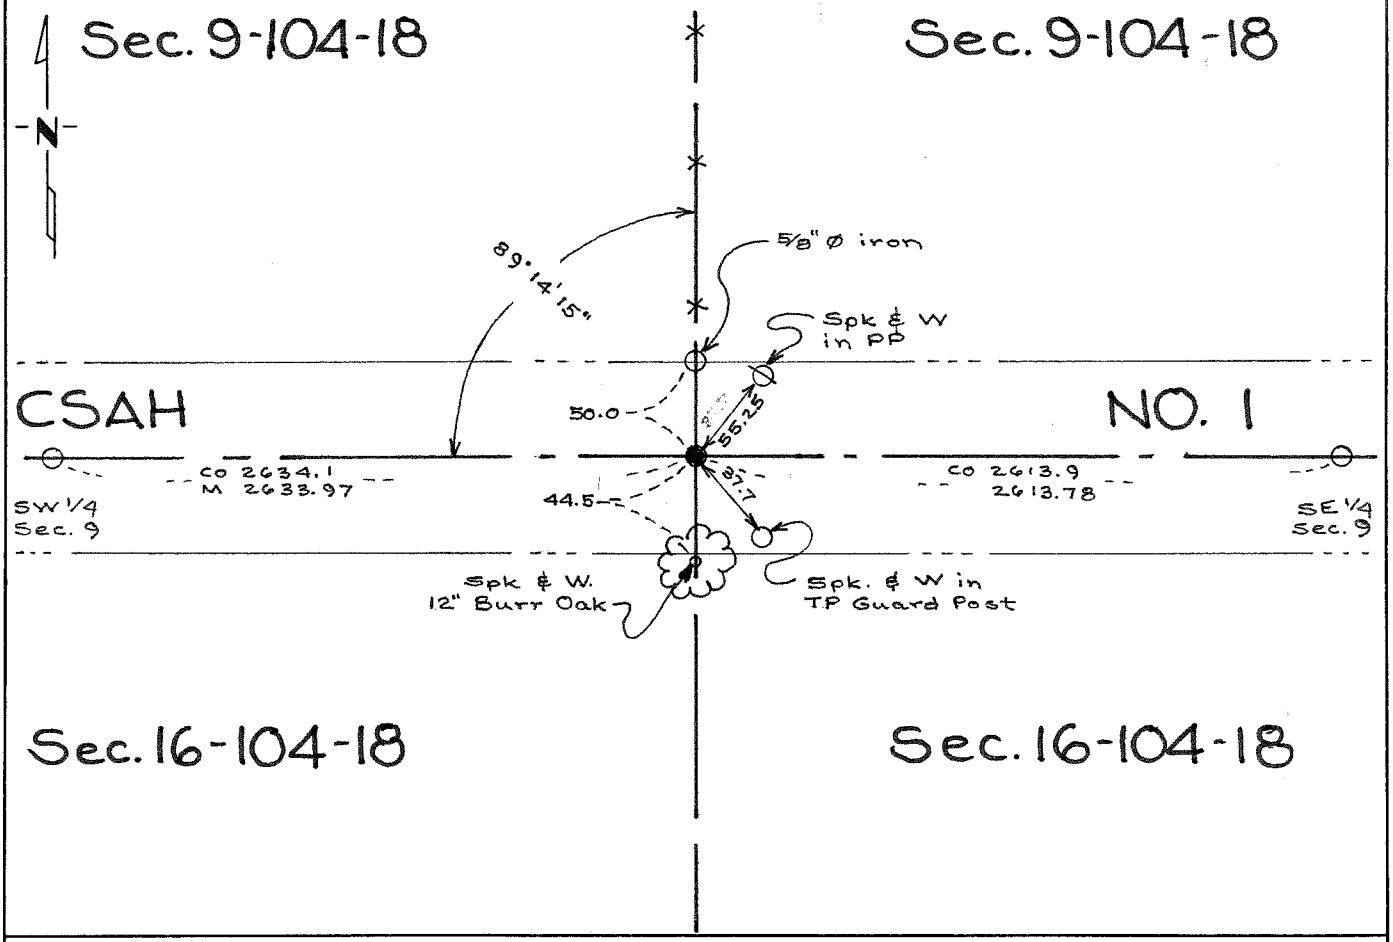

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

[signature] III 3-8-89
SIGNATURE DATE

Registration No. 13807

☑ Land Surveyor, ☐ Professional Engineer

☑ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of _____

I hereby certify that this document was filed in the County Rec. office at _____ .M. on the _____ day of _____ A.D., 19 ___

COUNTY RECORDER _____

By _____, Deputy

DOCUMENT NO. _____

M.H.D. FORM NO. 2105

STATEMENT OF EVIDENCE

S 1/4 corner Sec 9-104-18

This corner was originally established by Deputy Surveyor William I. Anderson of the U.S. General Land Office in 1854. The government notes show a wood post was set and the following ties were taken:

12" Burr Oak	N 57 1/2° E	60 links	=	39.6 ft
14" Burr Oak	S 55° E	200 links	=	132.0 ft

In 1986 Jones, Haugh & Smith Inc contacted the following for section corner information:

Mower County Highway Dept.
Tucker Land Surveying

The 1930 Mower County Grading Plan shows a core cut was made at this location and no monumentation was found.

Therefore we established the position of the corner using obliterated methods on a straight line between southwest and southeast section corners in line with the fence north.

The position fits occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

For electronic survey data and analysis, contact the firm of Jones, Haugh & Smith.