Index No. p82 "J"

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

SW Corner of Section 9, Township 104N, Range 18W, 5TH P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch:

☐ On 9-22-86 (DATE) found a wood stake, field stone & iron @ depth of 3.5'±

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 9-22-86 (DATE) placed a cast iron monument over

SKETCH OF REFERENCE TIES

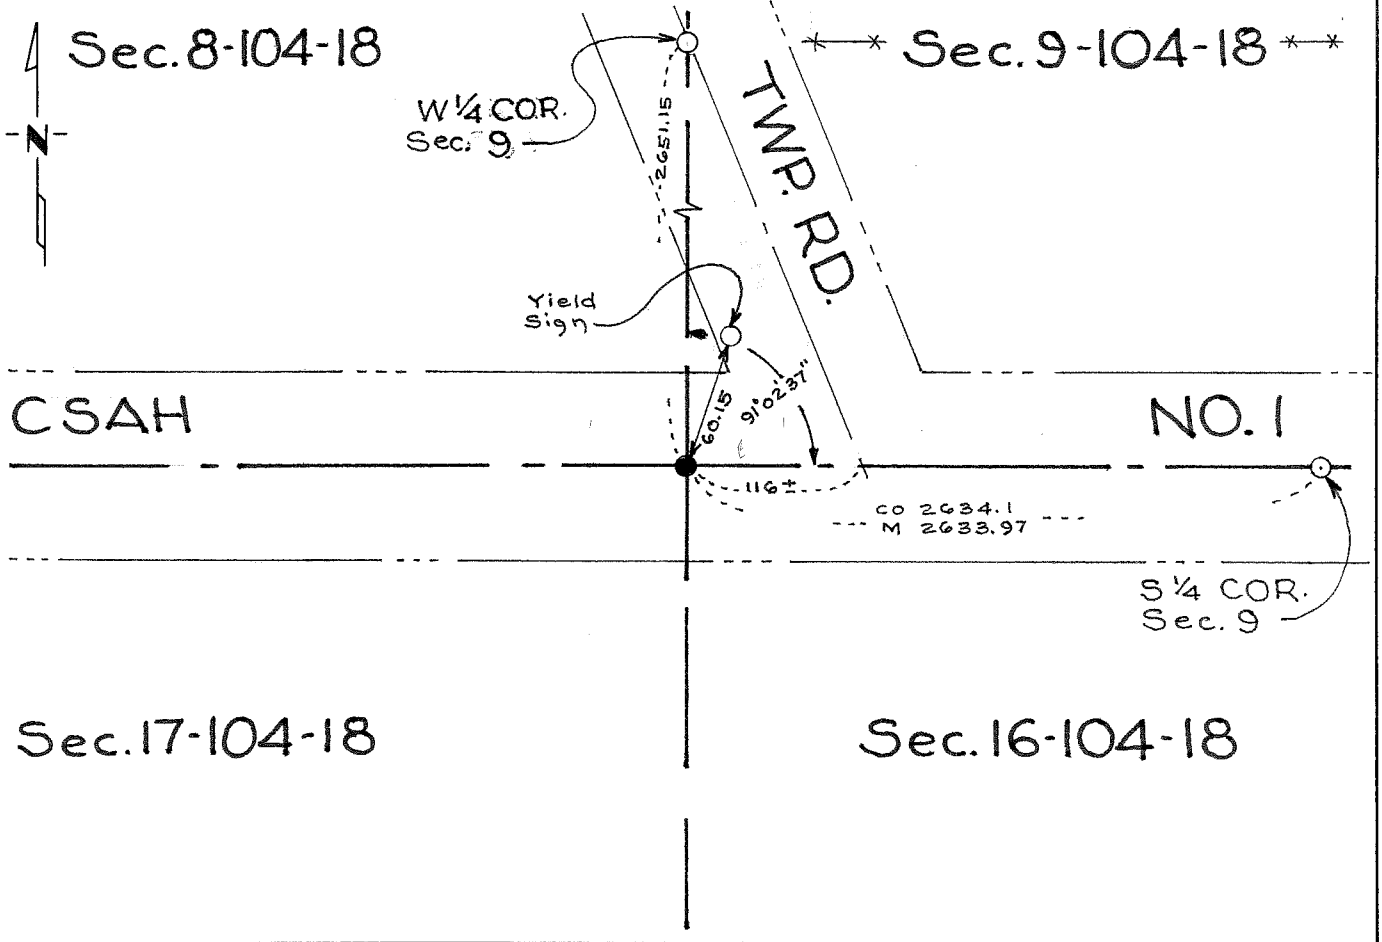

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

SIGNATURE 3-8-89 DATE

Registration No. 13807

☑ Land Surveyor, ☐ Professional Engineer

☑ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER

County of _____

I hereby certify that this document was filed in the County Rec. office at _____ .M. on the _____ day of _____ A.D., 19__

COUNTY RECORDER _____

By _____, Deputy

DOCUMENT NO. _____

M.H.D. FORM NO. 2105

STATEMENT OF EVIDENCE

SW corner Sec 9-104-18

This corner was originally established by Deputy Surveyor William I. Anderson of the U.S. General Land Office in 1854. The government notes show a wood post was set and the following ties were taken:

10" Burr Oak	S 38 1/2° E	640 links	=	422.4 ft
8" Burr Oak	N 70° E	440 links	=	290.40 ft

In 1986 Jones, Haugh & Smith Inc contacted the following for section corner information:

Mower County Highway Dept.
Tucker Land Surveying

The 1930 Mower County Grading Plan shows a monument was found during road construction.

In September 1986 Jones, Haugh & Smith Inc personnel together with the Mower County backhoe operator dug with the County backhoe on the centerline of the east-west road at the location of an iron pipe flush on road surface and uncovered a wood stake and field stone at a depth of 3.5 feet below road surface. The wood stake and stone were 3 feet more or less, west of the pipe found on road surface. Accepted the position of wood stake and field stone and set a cast iron monument over them on road surface and discarded pipe found on road surface.

The monument fits occupation and road centerlines within the section and agrees with 1930 records from Mower County Highway Department and is accepted as best evidence of a perpetuation of the original public land survey corner.

For electronic survey data and analysis, contact the firm of Jones, Haugh & Smith.