Index No. _____

# CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

NW Corner of Section 25, Township 104N Range 18W, 5TH P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch:

☐ On 2-8-93 (DATE) found a ½"ø IRON CAST IN A 6"ø CONCRETE MONUMENT 1.5' DEEP

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 2-8-93 (DATE) placed a CAST IRON MONUMENT OVER CONC. MON.

SKETCH OF REFERENCE TIES

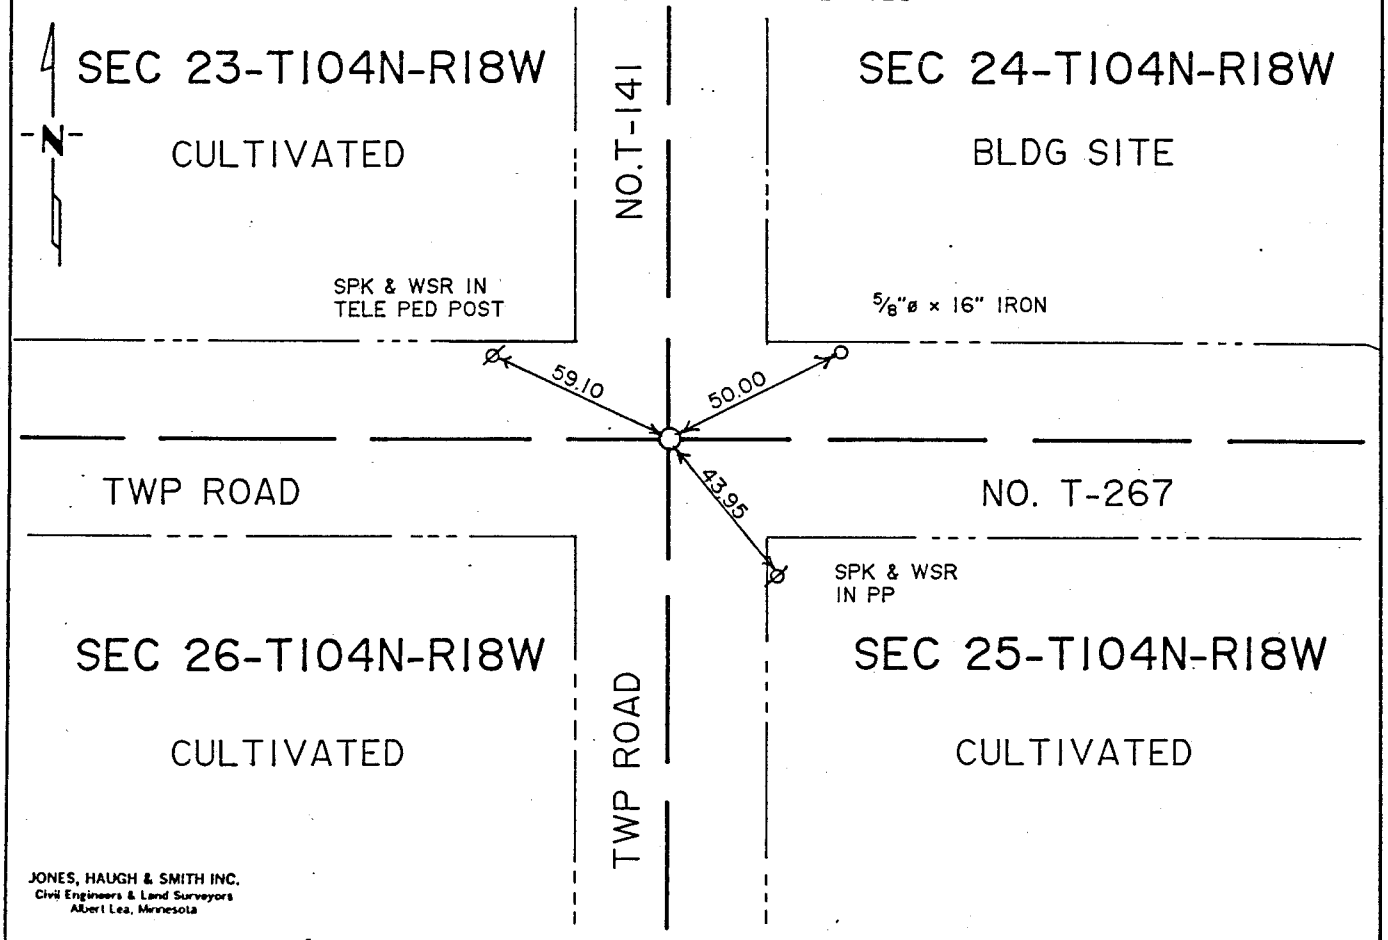


JONES, HAUGH & SMITH INC.
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

[signature] 2-12-93
SIGNATURE DATE

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☒ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of _____

I hereby certify that this document was filed in the County Rec. office at _____ .M. on the _____ day of _____ A.D., 19__

COUNTY RECORDER _____

By _____, Deputy

DOCUMENT NO. _____

M.H.D. FORM NO. 2105

STATEMENT OF EVIDENCE

NW cor Sec 25-104-18

This corner was originally established by Deputy Surveyor William I. Anderson of the U.S. General Land Office in 1854. The government notes show a wood post was set with a mound of earth and trench. The following ties were taken:

| | | |
|---|---|---|
| 10" Burr Oak | S 34°E | 690 links (455.40 ft) |
| 8" Burr Oak | N 9°E | 1255 links (828.30 ft) |

The following were contacted for section corner information:

Mower County Highway Department
Mower County Recorder's Office
Zenk Engineering
Tucker Land Surveying

The following information was obtained to support evidence of the original public land survey corner:

1885 Clausen, Mower County Surveyor, field notes indicate a government post was found.

1993 Jones, Haugh & Smith Inc crew under the direction of John H. Schulte IV, dug on centerline centerline north, south, east and west township roads and uncovered a 1/2" diameter iron cast in 6" diameter concrete monument 1.5 feet deep. We accepted concrete monument as best evidence of the perpetuation of the original public land survey corner and set cast iron monument near road surface above concrete monument.

The monument found fits occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

For electronic distances, angles and further analysis, contact Jones, Haugh & Smith Inc.