TIE BOOK p. 83

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

SW Corner of Section 28, Township 104 N, Range 18 W, 5TH P.M.

STATE OF MINNESOTA, County of Mower


At the corner location shown on the sketch:

☑ On 6-20-84 (DATE) found a Painted field stone 3.7' below road surface

☒ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☑ On 6-20-84 (DATE) placed a 5/8"ϕ x 24" iron over stone 0.3' below road surface

SKETCH OF REFERENCE TIES

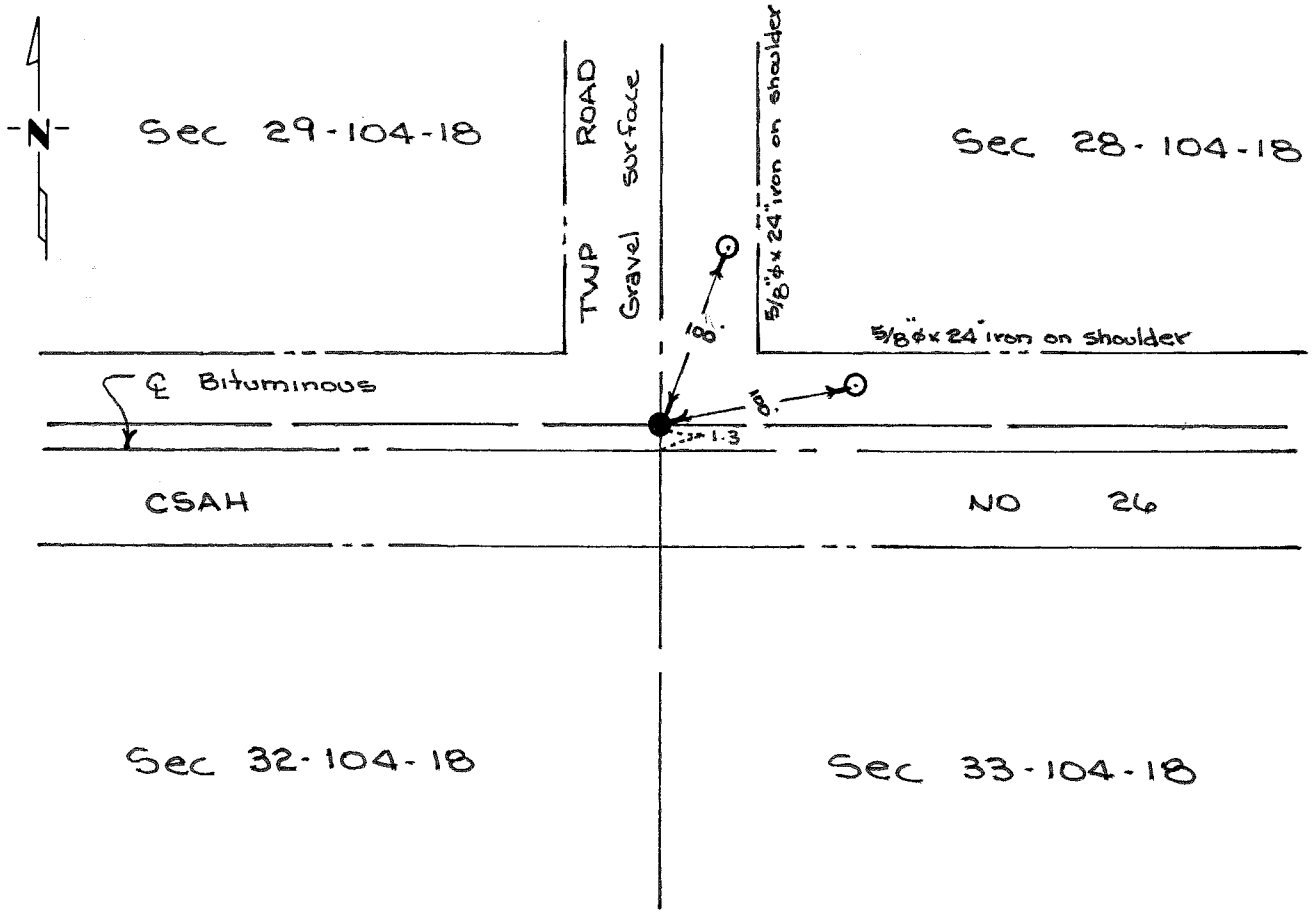

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

H. [signature] 7-19-84
SIGNATURE DATE

Registration No. 13807

☑ Land Surveyor, ☐ Professional Engineer

☐ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER

County of _____

I hereby certify that this document was filed in the County Rec. office at _____ .M. on the _____ day of _____ A.D., 19 ___

COUNTY RECORDER _____

By _____, Deputy

DOCUMENT NO. _____

M.H.D. FORM NO. 2105

STATEMENT OF EVIDENCE

SW corner Sec 28-104-18

1854 Wm I. Anderson, Deputy Surveyor set wood post and deposited charred stake with trench and mound during public land survey.

1930± Mower County Engineering Department tie book shows a concrete monument inplace at the section corner and gives County stationing on southwest corner and southeast corner.

1984 Jones, Haugh & Smith crew dug with County backhoe and at a depth of 3.7 feet below road surface found a 16" flat pointed field stone with a 3" diameter top. Found old wood stake on the east side of stone. Placed a 5/8"ø x 24" iron over stone capped RLS 13807. (Ray Guttormson, Mower County Engineer, said that he believed the 1930± concrete monument had been destroyed by road construction.)

The stone monument found fits road centerline and occupation lines and is in agreement with distance to southeast section corner using County Highway Department stationing. The corner is accepted as a perpetuation of the public land survey corner.