Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

NE Corner of Section 33, Township N104, Range 18W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch:

☐ On 12-5-90 (DATE) found a 1/2"Ø iron in 6" concrete monument.

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On _____ (DATE) placed a _____

SKETCH OF REFERENCE TIES

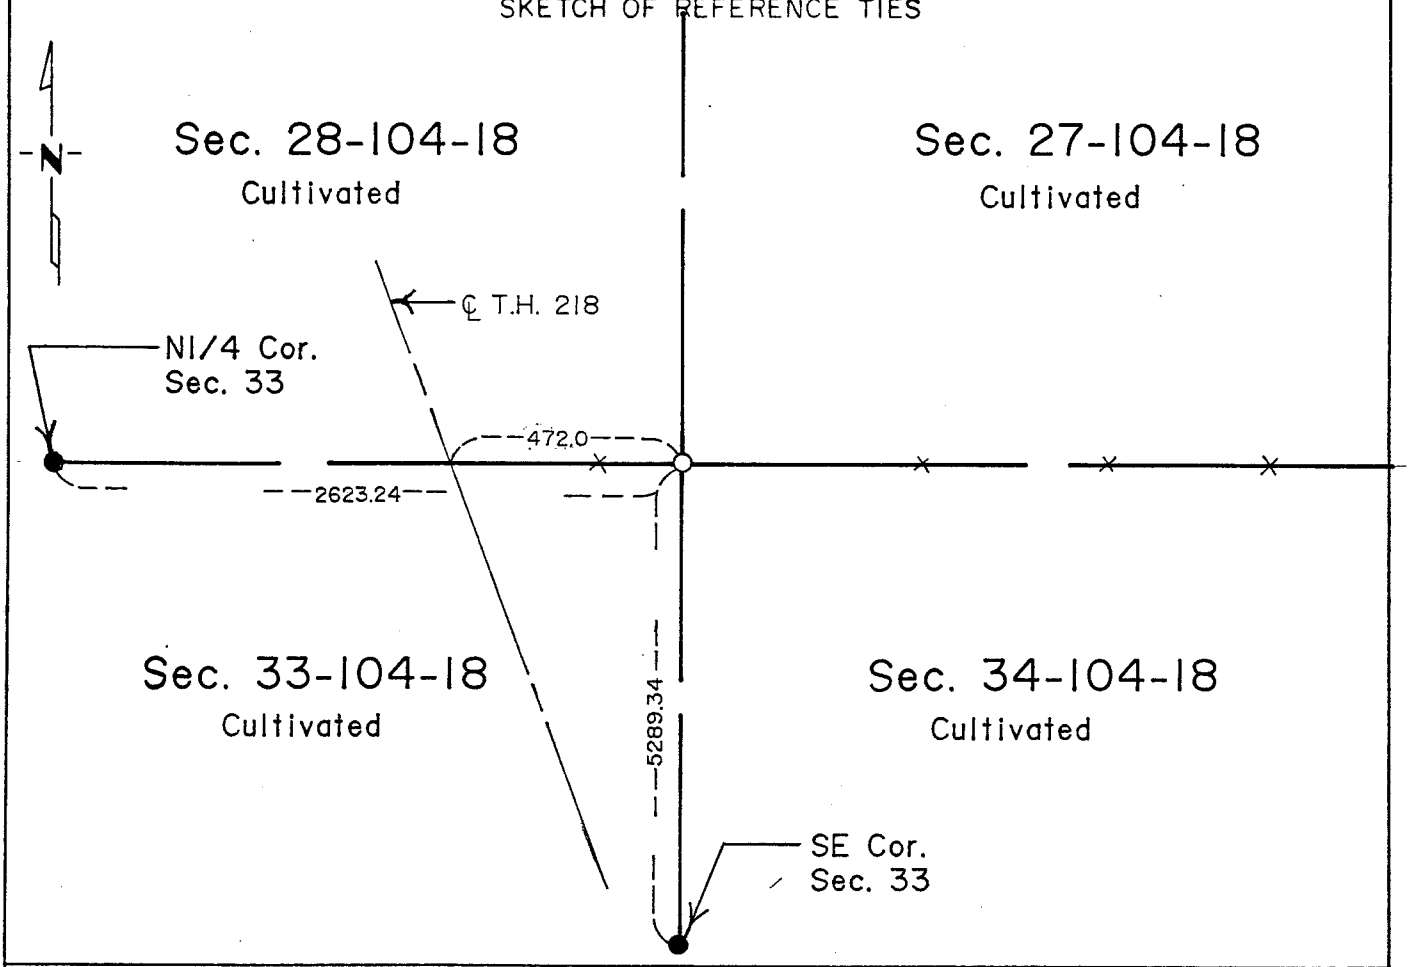

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

SIGNATURE _____ DATE 7-30-91

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☐ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER

County of _____

I hereby certify that this document was filed in the County Rec. office at _____ .M. on the _____ day of _____ A.D., 19__

COUNTY RECORDER _____

By _____, Deputy

DOCUMENT NO. _____

M.H.D. FORM NO. 2105

STATEMENT OF EVIDENCE

NE corner Sec. 33-104-18

This corner was originally established by Deputy Surveyor William I. Anderson of the U.S. General Land Survey Office in 1854. The government notes show this corner was marked with charred stake and a mound of earth with a trench.

The following were contacted for section corner information:

Mower County Engineering Department
Mower County Recorders Office

Book 'A' in the Mower County Engineering Office show a concrete monument inplace in line with fences east and west. The following tie was recorded:
472.0' W of centerline TH No. 218

1990 Jones, Haugh & Smith crew found a 1/2" diameter iron cast in a 6" square concrete monument in E-W fence line 472 feet more or less, east of centerline Trunk Highway 218.

Corner found fits occupation and past records and is accepted as best evidence of a perpetuation of public land survey corner.

For electronic survey data and analysis contact the firm of Jones, Haugh & Smith Inc.