P. 485
Bk. 237

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

W 1/4 Corner of Section 35, Township 104N, Range 18W, 5TH P.M.

STATE OF MINNESOTA, County of Mower


At the corner location shown on the sketch:

☒ On 4-13-81 (DATE) found ~~o~~ no evidence of PLS corner.

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☒ On 4-15-81 (DATE) placed a 4" Dia. cast iron marker stamped Quarter Corner

SKETCH OF REFERENCE TIES

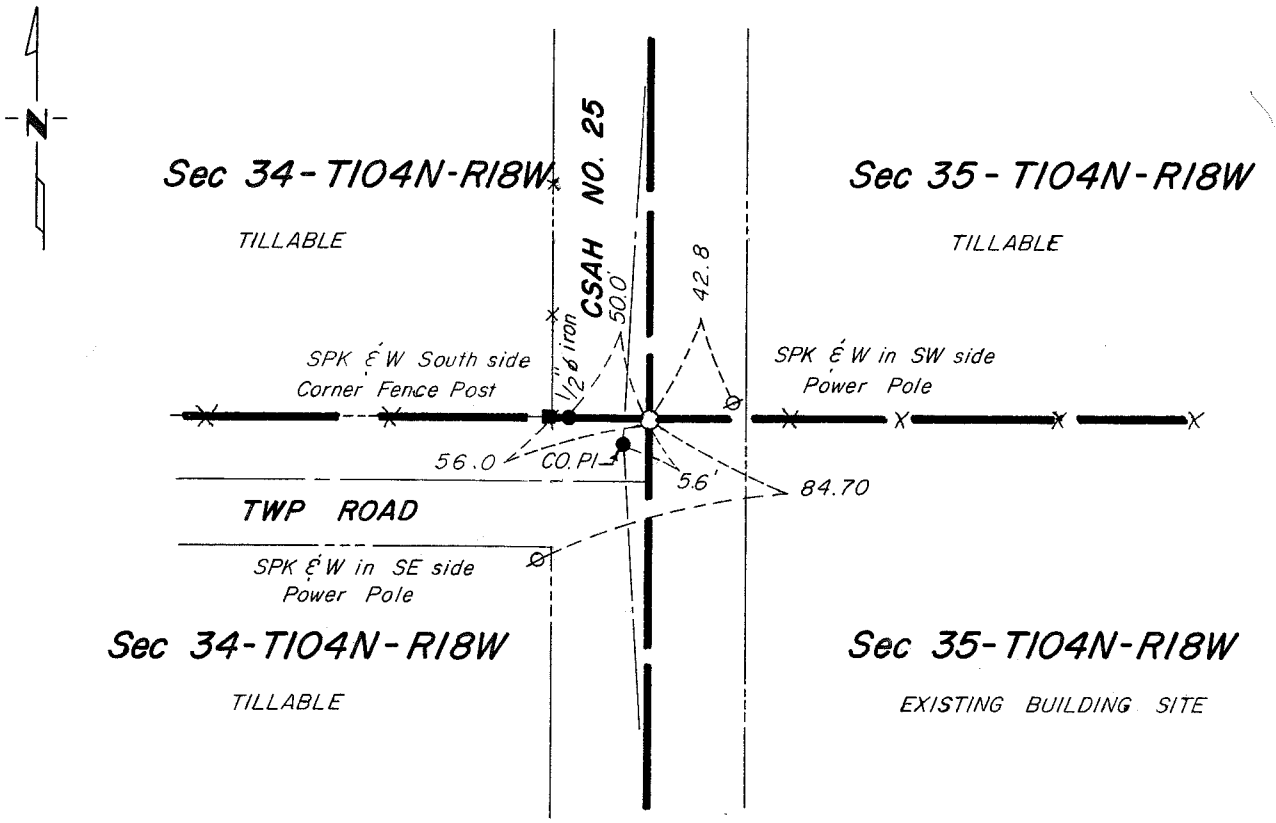

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

_____ (SIGNATURE) 12-14-88 (DATE)

Registration No. 13807

☑ Land Surveyor, ☐ Professional Engineer

☐ County Surveyor, ☐ County Engineer

OFFICE OF THE REGISTER OF DEEDS

County of _____

I hereby certify that this document was filed in the Reg. of Deeds office at _____ .M. on the _____ day of _____ A.D., 19__

Register of Deeds _____

By _____, Deputy

DOCUMENT NO. _____

M.H.D. FORM NO. 2105

STATEMENT OF EVIDENCE
W¼ corner Sec 35-T104N-R18W

1854 - William I. Anderson, Deputy Surveyor, set a post for the W¼ corner of Sec 35-T104N-R18W, during the original public land survey.

Mower County grading plans for County State-Aid Highway No. 25 indicate an iron pin 5.0 feet west of the W¼ corner Sec 35-T104N-R18W.

Jones, Haugh & Smith Inc personnel excavated a 10' x 5' x 4.5' deep hole at location of W¼ corner as shown on Mower County road plans, and found no evidence of the original wood post.

Jones, Haugh & Smith Inc personnel, then set a cast iron monument on a straight line between northwest corner Sec 35 and the southwest corner Sec 35, and in line with a fence line east and a fence line west. Distance to the northwest section corner is 2642.0. Distance to the southwest section corner is 2636.31.

The above corner agrees with existing occupation lines, existing county road surveys and has been used and recognized as the corner in several surveys. It is accepted as a perpetuation of the public land survey corner.