Index No. "M" p.70

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

NW/ Corner of Section 7, Township 103N, Range 17W, 5TH P.M.

STATE OF MINNESOTA, County of Mower


At the corner location shown on the sketch:

☒ On 3-12-87 (DATE) found a 5/8" ϕ iron cast in concrete in center of 6" dia. clay tile.

☒ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☒ On 3-12-87 (DATE) placed a cast iron monument over 5/8" ϕ iron

SKETCH OF REFERENCE TIES

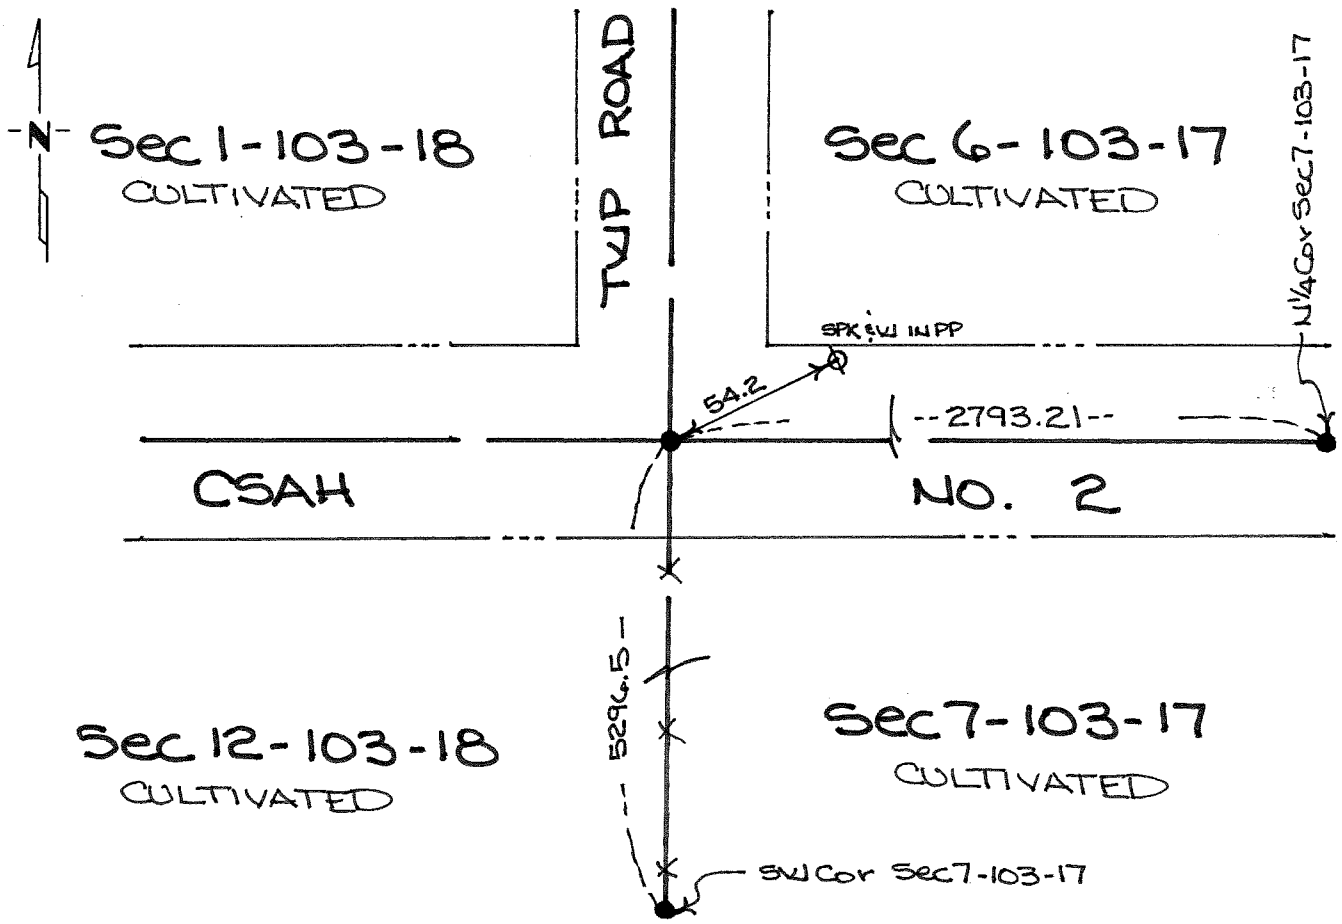

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

SIGNATURE 3-20-87 DATE

Registration No. 13807

☒ Land Surveyor, ☐ Professional Engineer

☐ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER

County of _____

I hereby certify that this document was filed in the County Rec. office at _____ .M. on the _____ day of _____ A.D., 19__

COUNTY RECORDER _____

By _____, Deputy

DOCUMENT NO. _____

M.H.D. FORM NO. 2105

STATEMENT OF EVIDENCE

NW corner Sec 7-103-17

This corner was originally established by Elisha S. Norris, Deputy Surveyor for the U.S. General Land Office, in 1853. The government notes show corner was marked with a wood post; and ties were taken to bearing trees marked:

10" Burr Oak N 14° E 396 Links
10" Burr Oak N 3° W 425 Links

March 1987 Jones, Haugh & Smith Inc contacted the following for corner information:

Mower County Recorder
Mower County Highway Department
Ray Tucker, Land Surveyor

The following information was obtained from the Mower County Highway Department:

1942 County Grading Plan shows a tile monument was uncovered during grading project and ties were taken.

1987 Jones, Haugh & Smith Inc crew dug on centerline centerline on north-east-west road at location of good signal with metal locator. At a depth of 0.5 feet uncovered a 5/8"ø iron. Continued digging and at a depth of 2.5 feet below road surface, uncovered a 6" diameter clay tile with 5/8"ø iron cast in concrete. The monument was in old roadbed. Set cast iron monument over the 6" clay tile.

The monument found is in agreement with 1942 record and fits occupation and road centerlines within the section and is accepted as the best evidence of a perpetuation of the original public land survey corner.

For electronic survey data and further analysis, contact Jones, Haugh & Smith Inc.